


MATERIALS	
BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE



## SPECIFICATIONS

FREQUENCY RANGE: DC TO 12.4 GHz  
 ATTENUATION: 20 dB  
 IMPEDANCE: 50 OHMS  
 ACCURACY:  $\pm 0.75$  dB  
 VSWR: 1.25:1 MAXIMUM  
 AVG. POWER HANDLING CAPABILITY: 2 WATTS

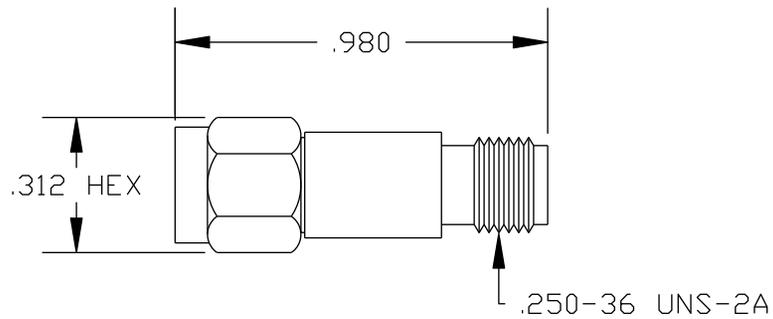

**PASTERNAK ENTERPRISES, INC.**

P.O BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**

DWG TITLE

**PE7045-20**

DES. SMA ATTENUATOR

REV. A

**FSCM NO. 53919**

CAD FILE 042408

SCALE N/A

SIZE A

127

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.