

59065 & 59070 Threaded Barrel Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- Threaded barrel with retaining nuts
- Available as M8 (57070/59070) or 5/16 (57065/59065) size options
- Customer defined sensitivity
- Choice of cable length and connector


Benefits

- Simple installation and adjustment using supplied retaining nuts
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Simple installation and adjustment

Applications

- Position and limit sensing
- Security system switch
- Linear actuators
- Industrial process control

DIMENSIONS (in) mm

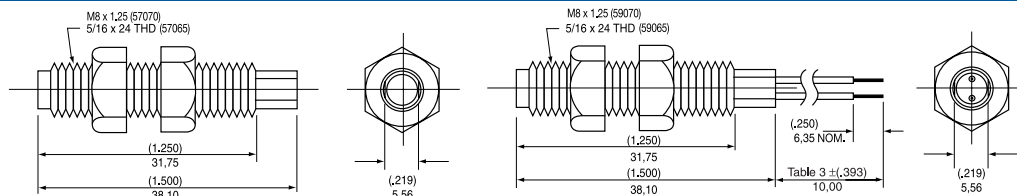

SCHEMATICS	Switch Type
Black Black	1 & 2
Black Blue White	3
Black Black	4

CUSTOMER OPTIONS - Switching Specifications

TABLE 1			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Contact Type						
Switch Type			1	2	3	4
Power	Power	Watt - max.	10	10	5	5
	Switching	Vdc - max.	200	300	175	175
Voltage	Breakdown	Vdc - min.	250	450	200	200
	Switching	A - max.	0.5	0.5	0.25	0.25
Current	Carry	A - max.	1.2	1.5	1.5	1.5
	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
Resistance	Insulation	Ω - min.	10 ¹⁰	10 ¹⁰	10 ⁹	10 ⁹
	Contact	pF - typ.	0.3	0.2	0.3	0.3
Capacitance	Operating	°C	-40 to +105	-20 to +105	-40 to +105	-40 to +105
	Storage	°C	-65 to +105	-65 to +105	-65 to +105	-65 to +105
Temperature	Operate	ms - max.	1.0	1.0	3.0	3.0
	Release	ms - max.	1.0	1.0	3.0	3.0
Time	11ms 1/2 sine	G - max.	100	100	50	50
	Shock	G - max.	30	30	30	30
Vibration	50-2000 Hz	G - max.	30	30	30	30

CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2							TABLE 3		TABLE 4	
Sensitivity Options:- Activate Distances are approximate using Hamlin 57065/57070 actuator as illustrated before modification							Cable Type:- 24 AWG 7/32 PVC 105°C UL1430/UL1569		Termination Options:-	
Select Option							Standard Lengths		SELECT OPTION	
Switch Type							CABLE LENGTH (in) mm		DESCRIPTION (2 WIRE VERSIONS ILLUSTRATED)	
S							01		A or F	
T							02		B	
U							03		C	
V							04		D	
1							05		E	
2										
3										
4										

ORDERING INFORMATION

59065/59070	-	X	-	X	-	XX	-	X
Series 59065/59070								
Switch Type	Table 1							
Sensitivity	Table 2							
Cable Length	Table 3							
Termination	Table 4							

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com
Hamletrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com