

REV. Status

REVISION -
04/21/92 YN

REVISION A
TEMECULA
WAS CARSON
REFORMATTED
05/03/96 DS

1. Electrical specifications
 - 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
 - 1.2 Output voltage and current: AC 12V 1000mA

V _{in}	1000mA Load	100mA Load
108	9.9 VAC MIN	14.5 VAC MIN
120	11.3-12.6 VAC	16.0 VAC MAX
132	-	-



NOTE: Specification applies after 10 minutes warm-up with 1000mA load and at any operating temperature

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output


2. Typical performance data test condition: T_a = +25° C, measured after 10 minute warm-up with input at 120V 60Hz

3. Safety agencies
UL File No. E82180
CSA File No. LR38236

4. Nameplate: Information is as follows:
Metallic letters on a black background

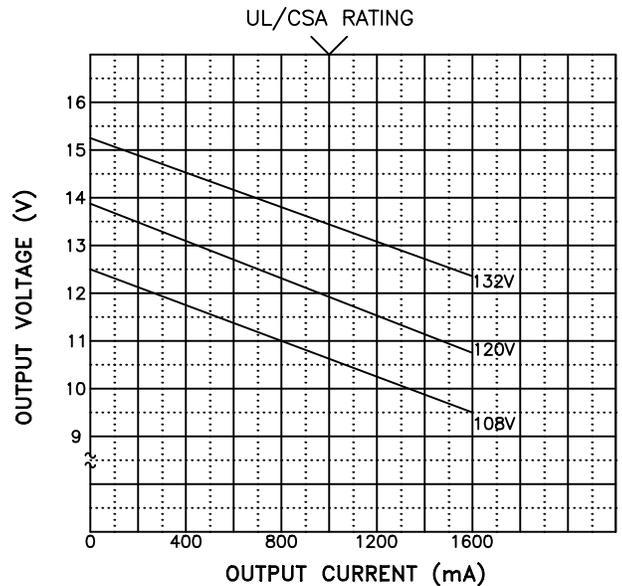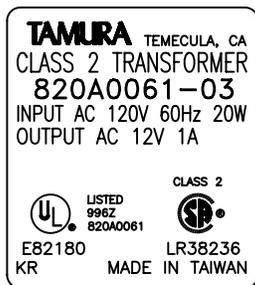

5. Mechanical Specifications
All dimensions shown are nominal unless otherwise specified

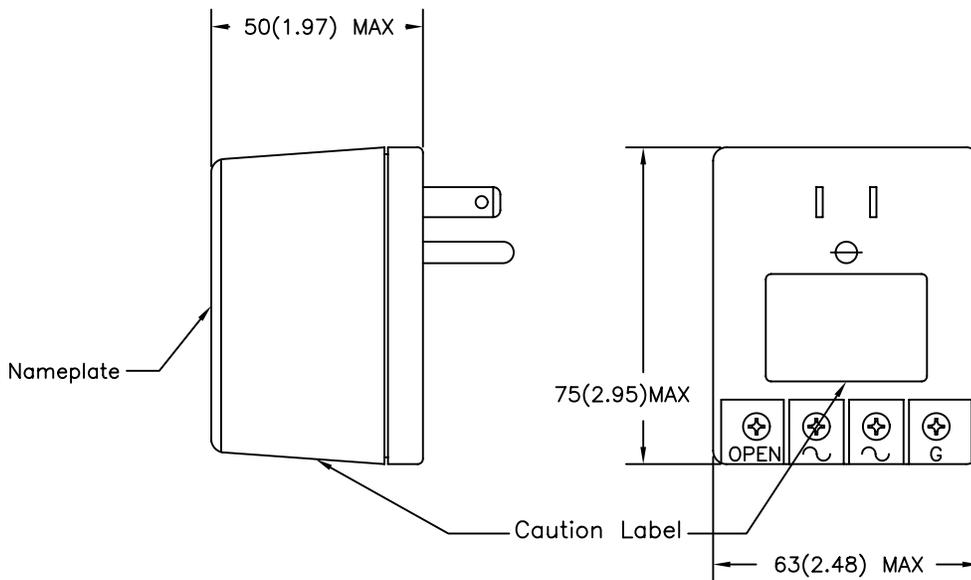

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

M. Ong

DWG CONTROL NO. P-A7-10657
ACAD\PS\A7106571.DWG

REV A

UL/CSA AC 12V 1000mA
POWER SUPPLY

820A0061-03
MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.