

DUAL ENTRY SOLENOID KEY OPERATED SAFETY INTERLOCK NOMENCLATURE

GK

GK

BODY / INDICATOR		CONDUIT / SEAL		BASIC 		HEAD		KEY		TYPE / OVER-RIDE		SOLENOID VOLTAGE	MODIFICATION CODE 	
L	HEAD TO LEFT - WITH INDICATORS	A	1/2 NPT - VITON SEALS	2	2 SNAP ACTION DPDT	L	OPENING TO FRONT AND TOP	6	STRAIGHT	A	SOLENOID UNLOCK WITH SCREWDRIVER	1	12 VDC	F04
R	HEAD TO RIGHT - WITH INDICATORS	B	PG 13.5 - VITON SEALS	3	2 SLOW ACTING SPDT BBM	M	OPENING TO RIGHT AND TOP	7	90 DEGREE		SLOT OVER-RIDE	2	24 VDC	F05
F	HEAD TO LEFT - WITHOUT INDICATORS	C	20 MM - VITON SEALS	6	SLOW ACTING 2 NC	N	OPENING TO BACK AND TOP	8	UP - DOWN, SPRING LOADED	B	SOLENOID UNLOCK WITHOUT OVER-RIDE	3	48 VDC	FW
G	HEAD TO RIGHT - WITHOUT INDICATORS	D	PF 1/2 - VITON SEALS	10	SLOW ACTING 4 NC	P	OPENING TO LEFT AND TOP	9	SIDE - SIDE, SPRING LOADED	S	SOLENOID LOCK WITH SCREWDRIVER	4	120 VAC	
		E	1/2 NPT - BUNA-N SEALS	12	SLOW ACTING 2 NC - 1 NO BBM			X	NO KEY		SLOT OVER-RIDE	6	240 VAC	
		F	PG 13.5 - BUNA-N SEALS	14	SLOW ACTING 2 NC - 2 NO BBM					T	SOLENOID LOCK WITHOUT OVER-RIDE			
		G	20 MM - BUNA-N SEALS	15	SLOW ACTING 2 NC - 2 NO BBM - GOLD									
		H	PF 1/2 - BUNA-N SEALS	16	SLOW ACTING 3 NC - 1 NO BBM									
				30	2 SLOW ACTING 4 NC - GOLD									
				32	2 SLOW ACTING 2 NC - 1 NO BBM - GOLD									
				34	2 SLOW ACTING 2 NC - 2 NO BBM - GOLD									
				36	2 SLOW ACTING 3 NC - 1 NO BBM - GOLD									
				40	2 SLOW ACTING 4 NC									
				42	2 SLOW ACTING 2 NC - 1 NO BBM									
				44	2 SLOW ACTING 2 NC - 2 NO BBM									
				46	2 SLOW ACTING 3 NC - 1 NO BBM									

NOTES

- 1 - ZINC DIECAST BODY AND HEAD WITH STEEL COVER. BODY, HEAD AND COVER FINISHED WITH EPOXY PAINT
- 2 - PROVIDED WITH PLASTIC SNAP FIT COVER TO PLUG UNUSED KEY ENTRY WINDOW
-  THE LEFT INDICATOR IS GREEN AND THE RIGHT INDICATOR IS RED. NOT PRESENT ON BODY/INDICATOR CODES F OR G
- 4 - MAXIMUM OPERATING FREQUENCY (Fmax) = 100 OPS/MIN
- 5 - INSERTION FORCE = 35 N
- EXTRACTION FORCE = 28 N
- 6 LB
- MAXIMUM SOLENOID LOCKING FORCE = 1000 N
- 224 LB
-  ROTATE 1/4 TURN CLOCKWISE TO UNLOCK DEVICES WITH HEAD TO LEFT, SOLENOID UNLOCK AND DEVICES WITH HEAD TO RIGHT, SOLENOID LOCK. ROTATE 1/4 TURN COUNTERCLOCKWISE TO UNLOCK DEVICES WITH HEAD TO LEFT, SOLENOID LOCK AND DEVICES WITH HEAD TO RIGHT, SOLENOID UNLOCK.
-  NOT PRESENT ON TYPE/OVER-RIDE CODES B OR T
-  SWITCH MUST OPERATE BEFORE REACHING MINIMUM INSERTION DISTANCE
- 8 - T-15 TAMPERPROOF TORX DRIVER BIT PROVIDED
-  ELECTRICAL RATINGS ARE FOR BASIC SWITCHES
- 10 - MINIMUM SOLENOID VOLTAGE = 80% DC / 85% AC OF RATED VOLTAGE
- MAXIMUM SOLENOID VOLTAGE = 110% OF RATED VOLTAGE
- SOLENOID POWER = 12 WATTS NOMINAL
-  SEE PAGES 10, 11, 12 AND 13 FOR CIRCUIT DIAGRAMS
- 12 - NO CHANGES CAN BE MADE TO THIS DRAWING WITHOUT JOINT FREEPORT / NEWHOUSE APPROVAL
-  THE LEFT INDICATOR IS YELLOW AND THE RIGHT INDICATOR IS RED
-  10-PIN CONNECTOR, BRAD HARRISON PART NO.3R1006AZ1F010 OR EQUIVALENT
-  4-PIN CONNECTOR, WOODHEAD PART NO.80599-19 OR MOLEX PART NO.08631MZ1 OR EQUIVALENT
-  5-PIN CONNECTOR, BRAD HARRISON PART NO.41310 OR EQUIVALENT
-  CONNECTOR INSTALLED IN BOTTOM CONDUIT HOLE
-  CONNECTOR INSTALLED IN SIDE CONDUIT HOLE
-  FOR CONNECTOR AND CIRCUIT DETAILS OF MODIFICATION CODE, REFER PAGE 14 FOR CODE F05, PAGE 15 FOR CODE FW AND PAGE 16 FOR CODE F04

ELECTRICAL RATING 				ENVIRONMENTAL RATINGS	APPROVALS
AC		DC		IP68 NEMA 1, 4, 6P, 12 & 13	   IEC 947-5-1 EN60947-5-1
A300	AC 15	Q300	DC 13	TEMP RANGE -25°C TO 40°C	
Ue	Ie	Ue	Ie	-13°F TO 104°F	
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)	STORAGE -40°C TO 120°C	
120	6	24	2.9	-40°F TO 248°F	
240	3	125	.55	SHOCK: 50G PER IEC 68-2-27	
		250	.27	VIBRATION: 10G PER IEC 68-2-6	
Ith = 10 A					

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

 **MICRO SWITCH**
a Honeywell Division

CATALOG LISTING

SWITCH - DOOR INTERLOCK

GK SERIES CHART 4

THIRD ANGLE PROJECTION

SCALE NTS




DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1

NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES	ANGLES	
INCH	MM	INCH	MM	INCH	
1/16	1.6	1/32	0.8	1/64	0.4
1/8	3.2	1/16	1.6	1/32	0.8
3/16	4.8	1/8	3.2	1/16	1.6
1/4	6.4	3/16	4.8	1/8	3.2
5/16	8.0	1/4	6.4	3/16	4.8
3/8	9.6	5/16	8.0	1/4	6.4
7/16	11.2	3/8	9.6	5/16	8.0
1/2	12.8	7/16	11.2	3/8	9.6
5/8	16.0	1/2	12.8	7/16	11.2
3/4	19.2	5/8	16.0	1/2	12.8
7/8	22.4	3/4	19.2	5/8	16.0
1	25.6	7/8	22.4	3/4	19.2




DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY

WEIGHT 1,5 kg / 3,3 LB

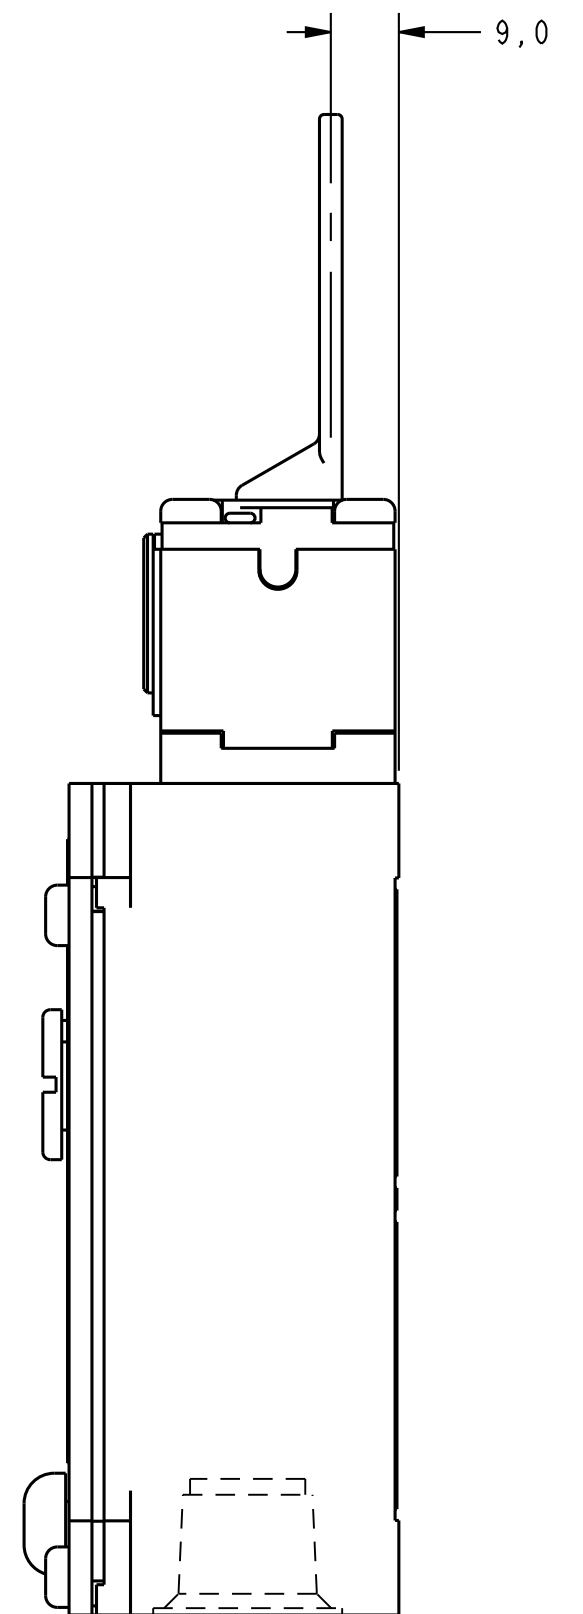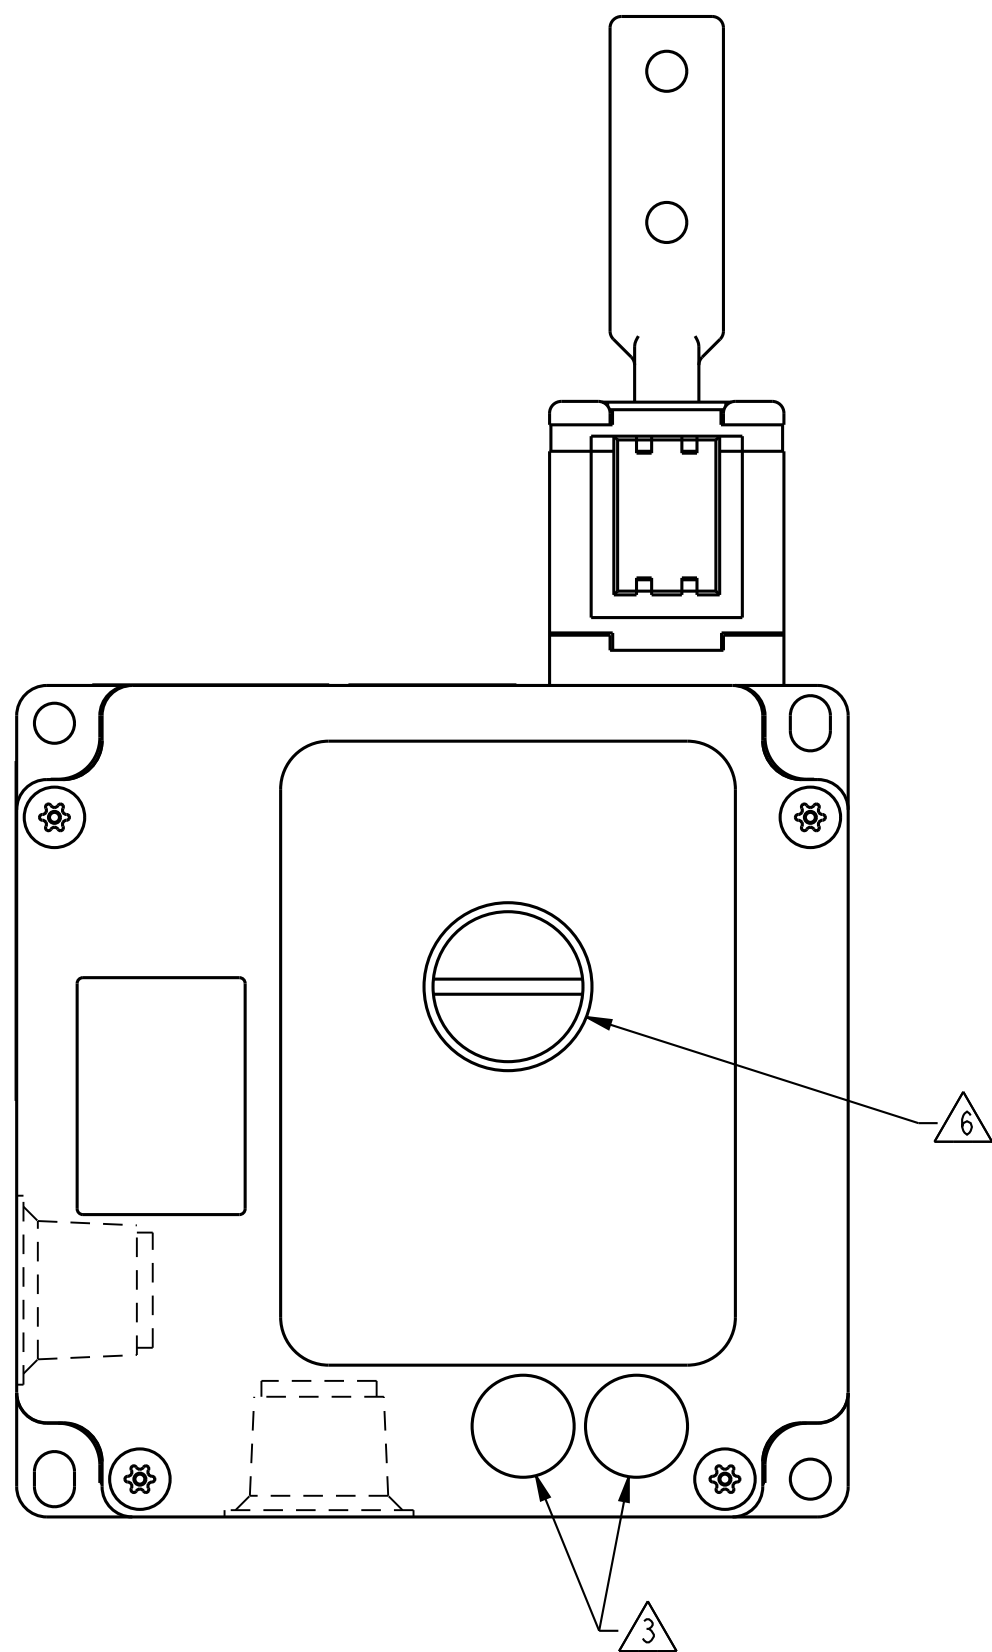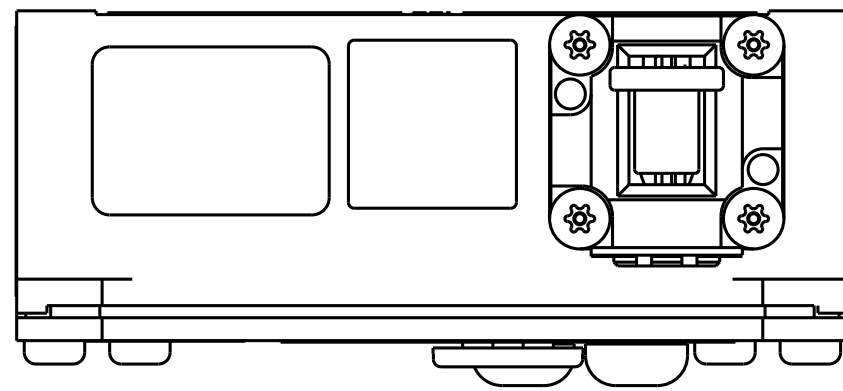

TOP KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			<table border="1"> <tr> <td>NO PLACES</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> </tr> <tr> <td>ONE PLACE</td> <td>2.1</td> <td>2.1</td> <td>2.1</td> <td>2.1</td> </tr> <tr> <td>TWO PLACES</td> <td>3.1</td> <td>3.1</td> <td>3.1</td> <td>3.1</td> </tr> <tr> <td>THREE PLACES</td> <td>4.1</td> <td>4.1</td> <td>4.1</td> <td>4.1</td> </tr> </table>		NO PLACES	1.1	1.1	1.1	1.1	ONE PLACE	2.1	2.1	2.1	2.1	TWO PLACES	3.1	3.1	3.1	3.1	THREE PLACES	4.1	4.1	4.1	4.1
NO PLACES	1.1	1.1	1.1	1.1																				
ONE PLACE	2.1	2.1	2.1	2.1																				
TWO PLACES	3.1	3.1	3.1	3.1																				
THREE PLACES	4.1	4.1	4.1	4.1																				
FED. MFG. CODE 91929	CATALOG LISTING		<table border="1"> <tr> <td>DESIGN UNITS</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> </tr> <tr> <td>WEIGHT</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> </tr> </table>		DESIGN UNITS	1.1	1.1	1.1	1.1	WEIGHT	1.1	1.1	1.1	1.1										
DESIGN UNITS	1.1	1.1	1.1	1.1																				
WEIGHT	1.1	1.1	1.1	1.1																				
MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	GK SERIES CHART 4	<table border="1"> <tr> <td>DESIGN UNITS</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> </tr> <tr> <td>WEIGHT</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> <td>1.1</td> </tr> </table>		DESIGN UNITS	1.1	1.1	1.1	1.1	WEIGHT	1.1	1.1	1.1	1.1										
DESIGN UNITS	1.1	1.1	1.1	1.1																				
WEIGHT	1.1	1.1	1.1	1.1																				

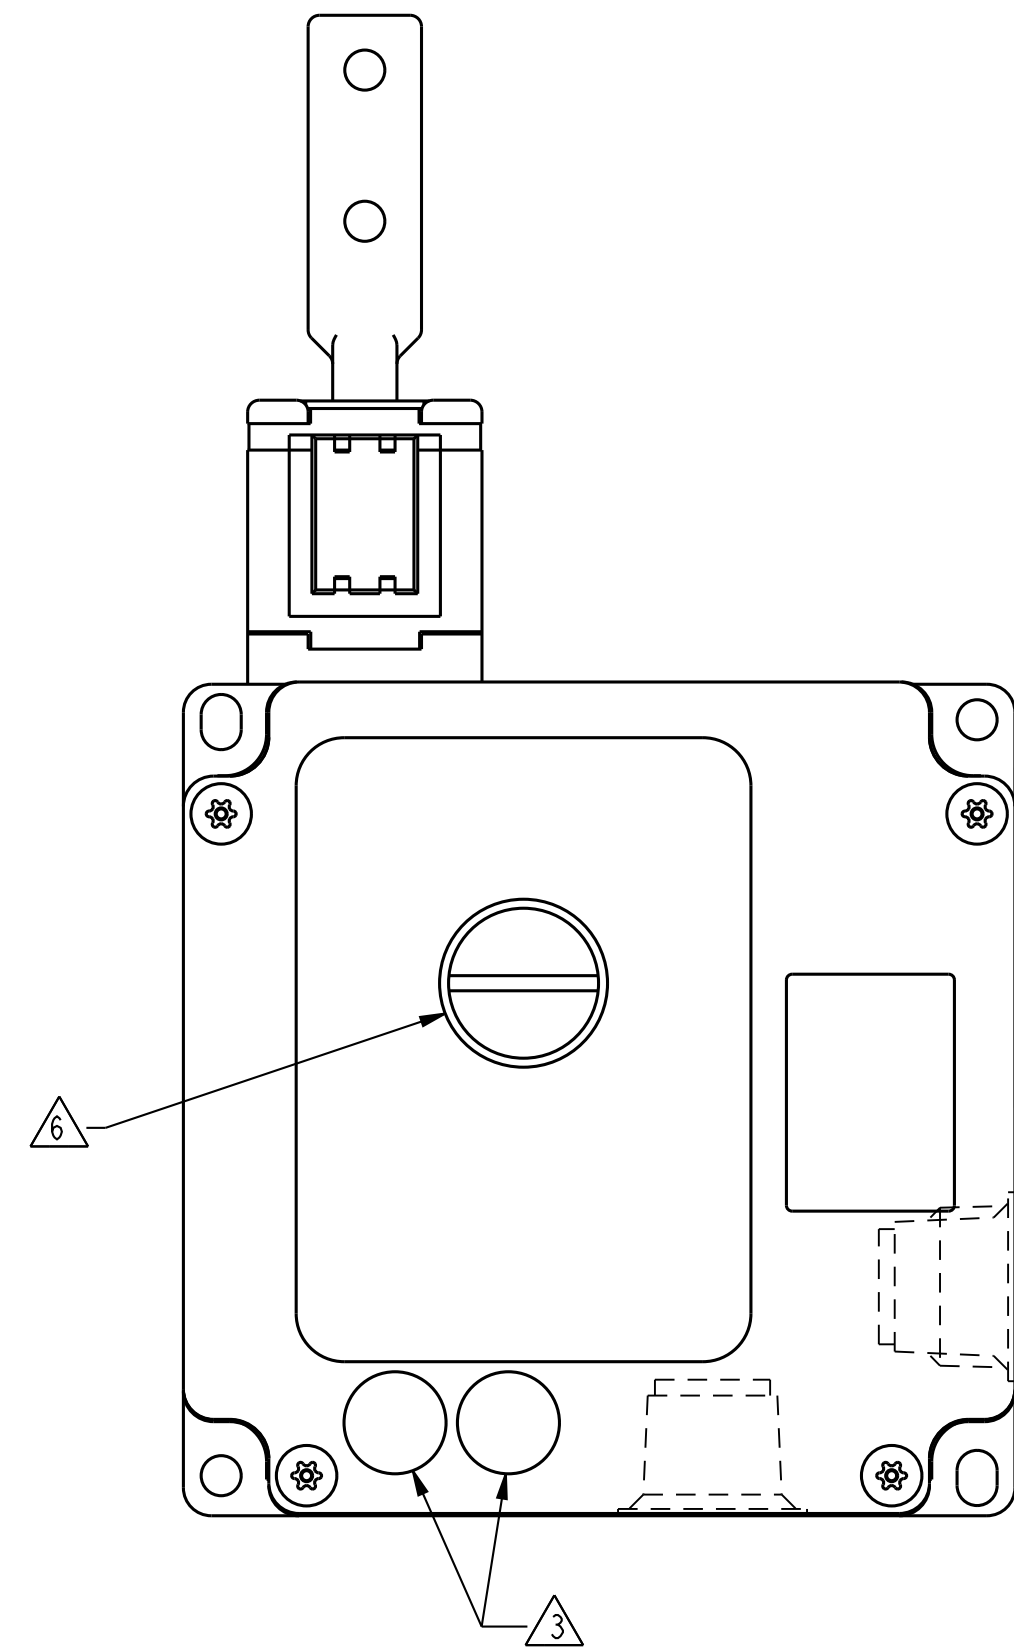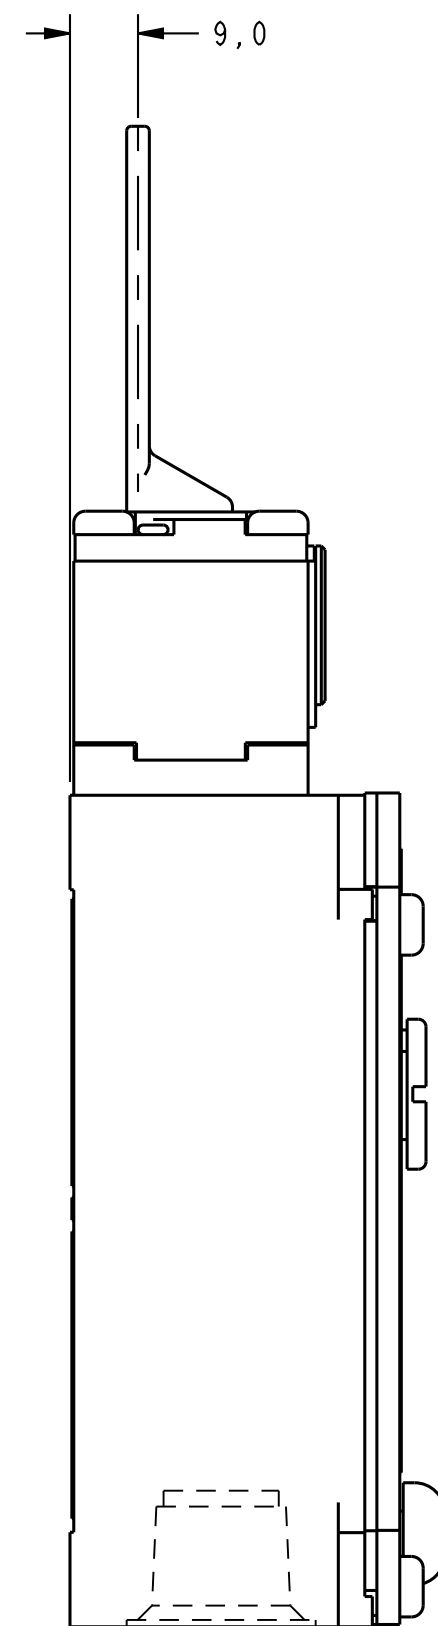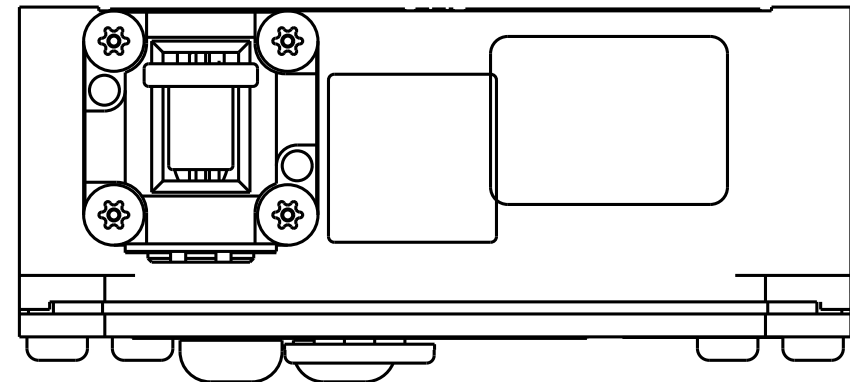


TOP KEY ENTRY

FRONT KEY ENTRY


BODY / INDICATOR CODES L OR F

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		DIM. TOL. mm mm / in.	
FED. MFG. CODE 91929	CATALOG LISTING	NO PLACES ONE PLACE TWO PLACES THREE PLACES ANGLES	0.00 / 0.0 0.47 / 0.018 0.157 / 0.006 0.151 / 0.005
MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	SI METRIC US CUSTOMARY	
		DESIGN UNITS ☒	
		WEIGHT 1,5 kg / 3.3 LB	


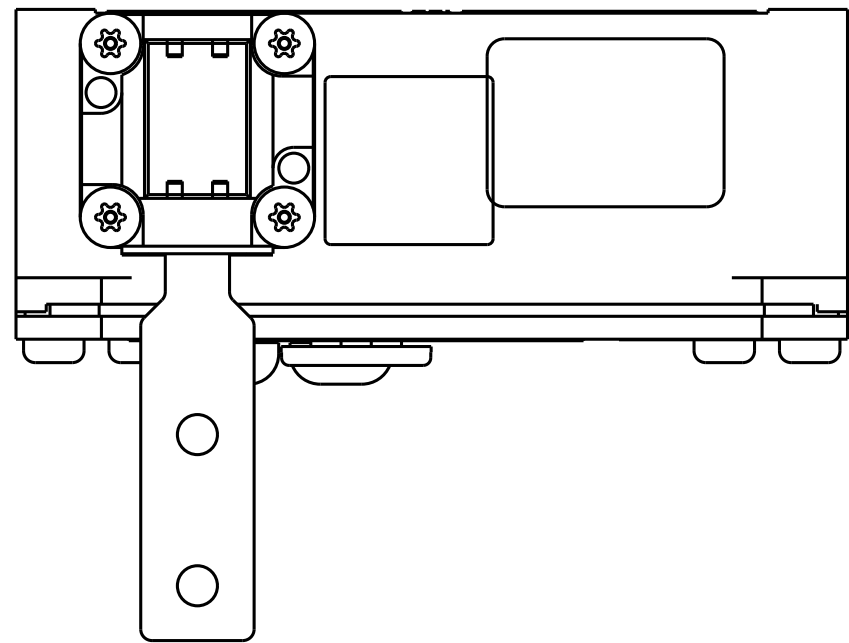


WITH KEY IN FRONT ENTRY POSITION

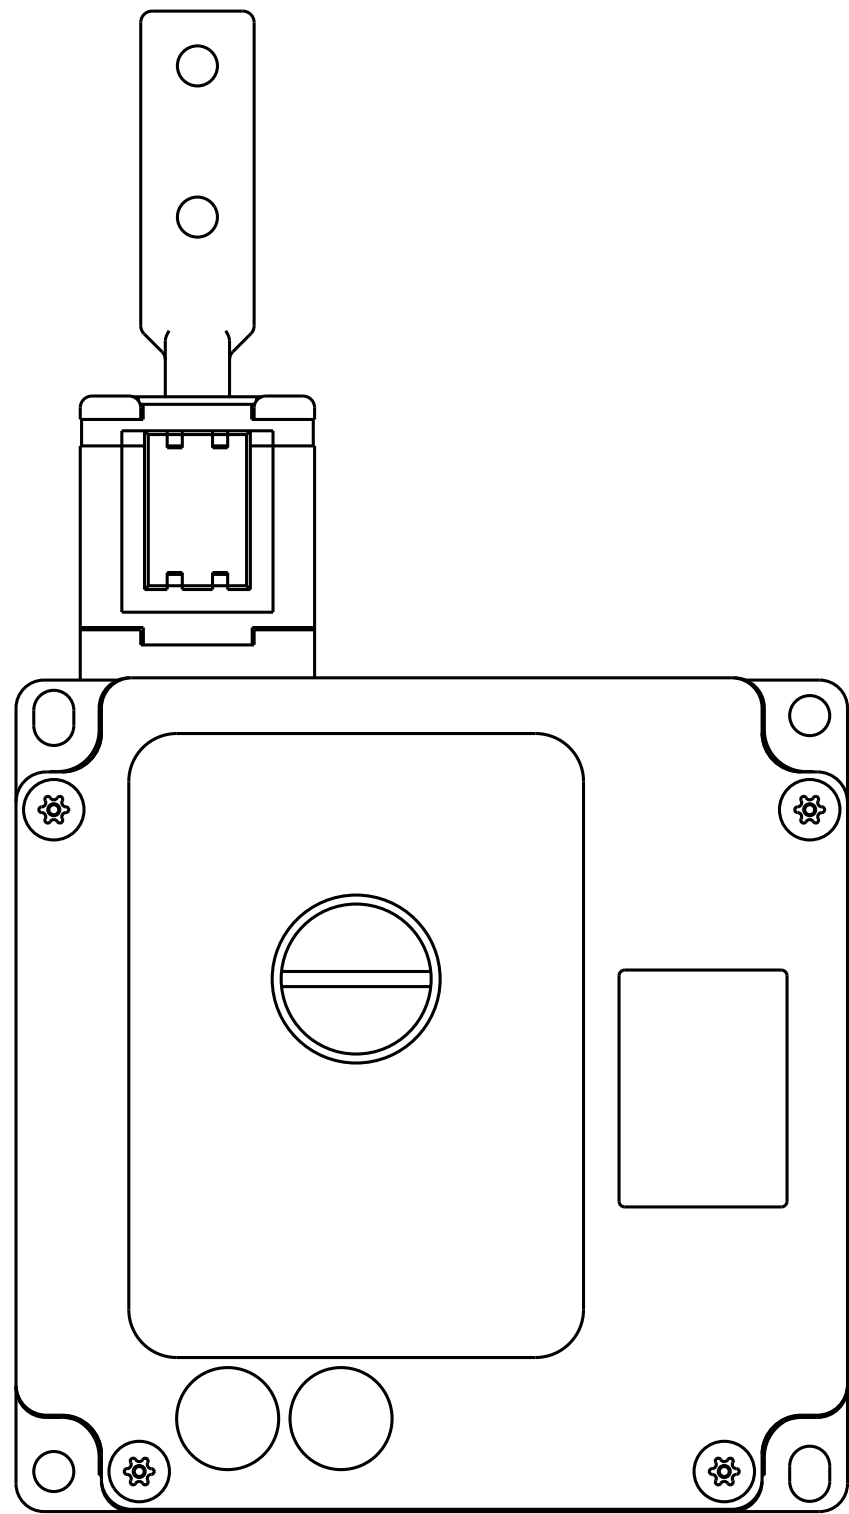


WITH KEY IN TOP ENTRY POSITION

HEAD CODE L

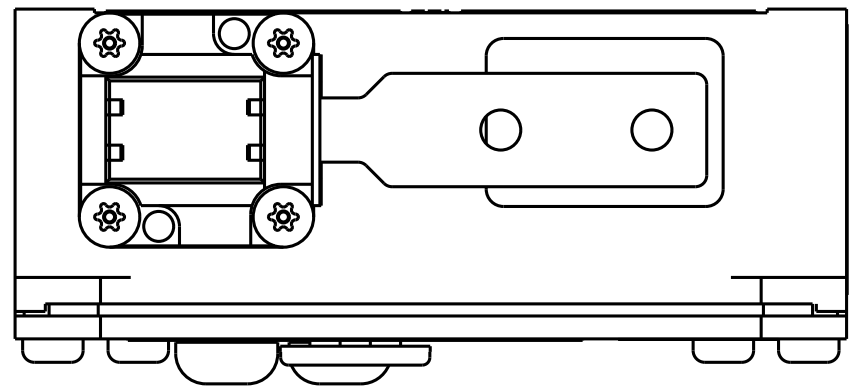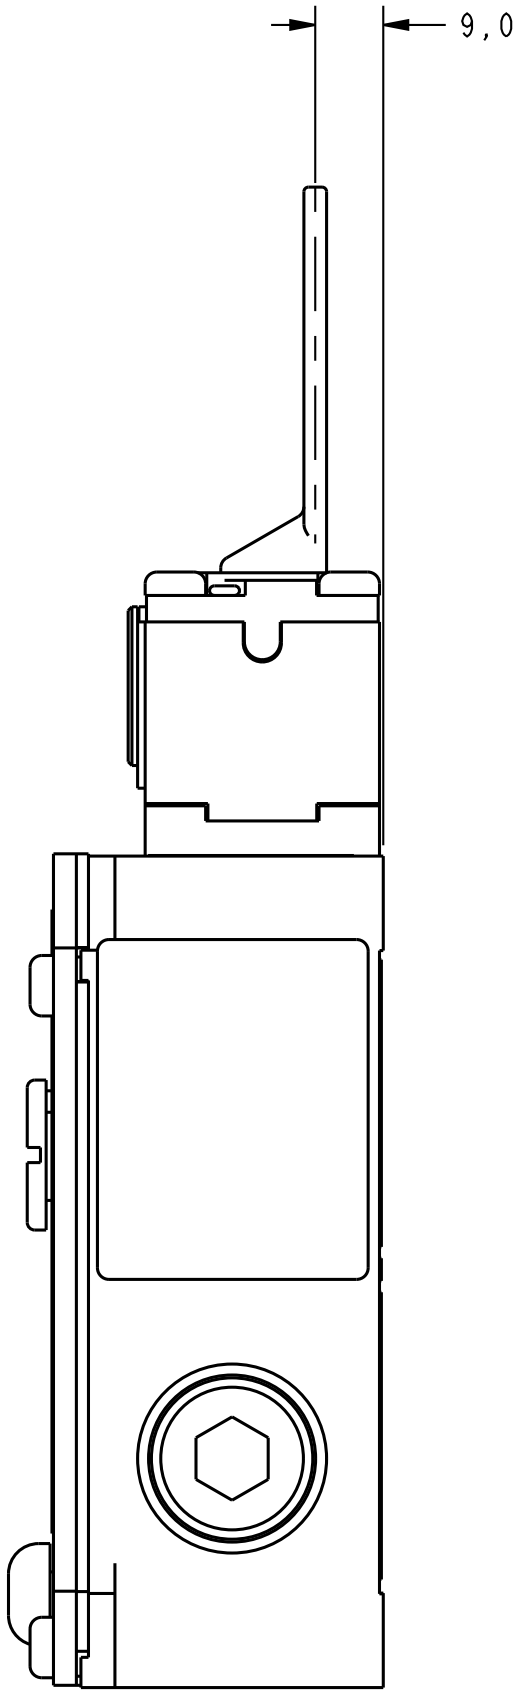



WITH KEY IN FRONT ENTRY POSITION

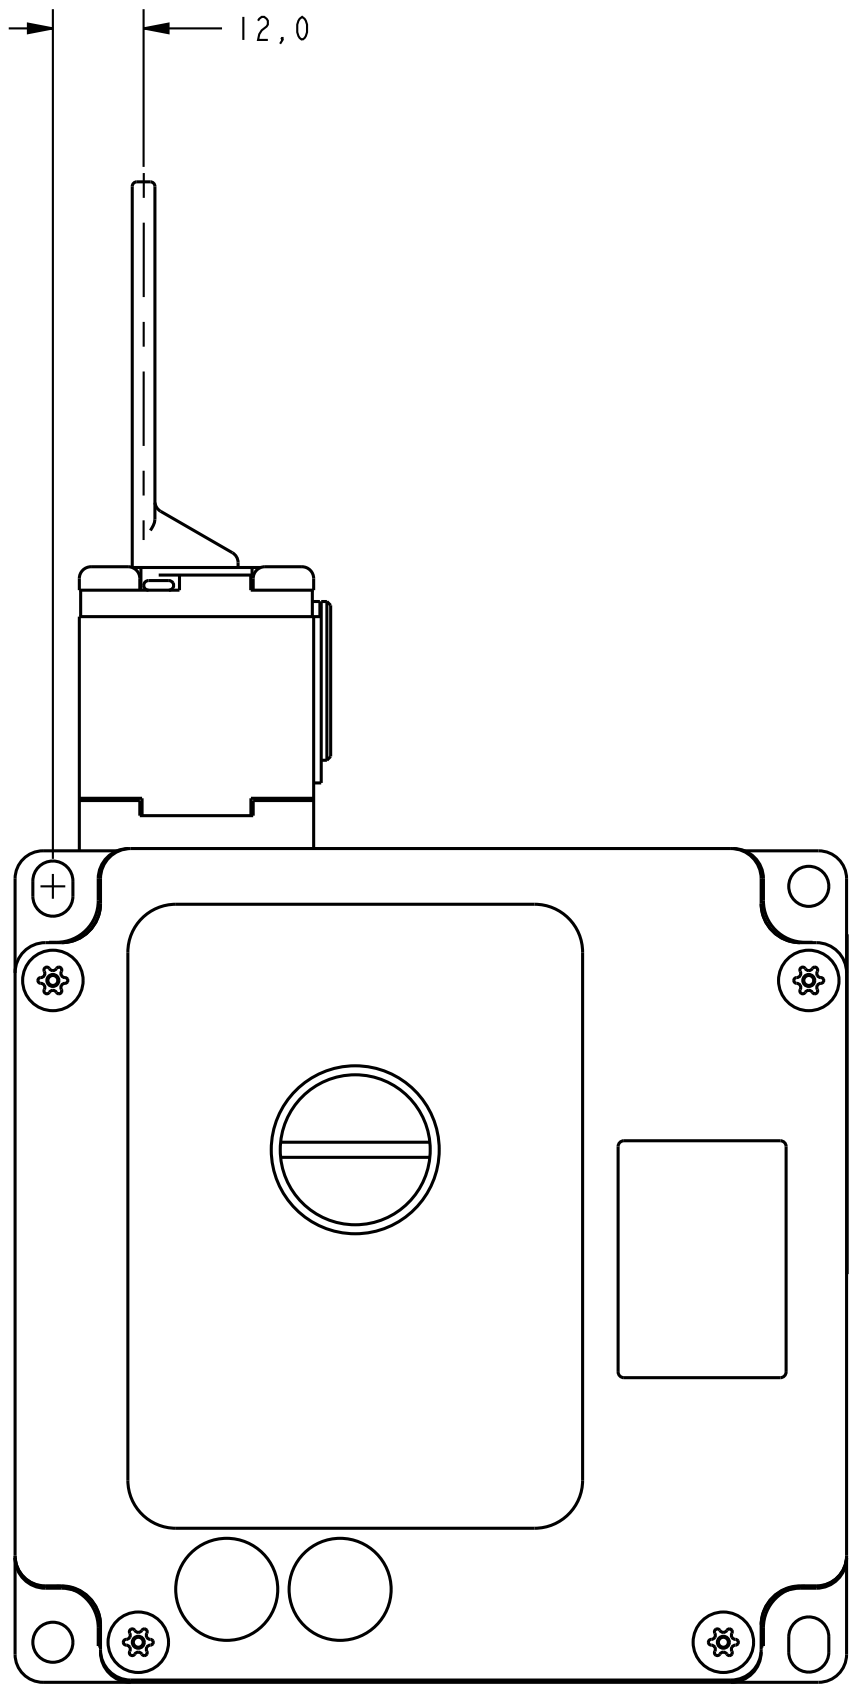


WITH KEY IN TOP ENTRY POSITION

HEAD CODE M

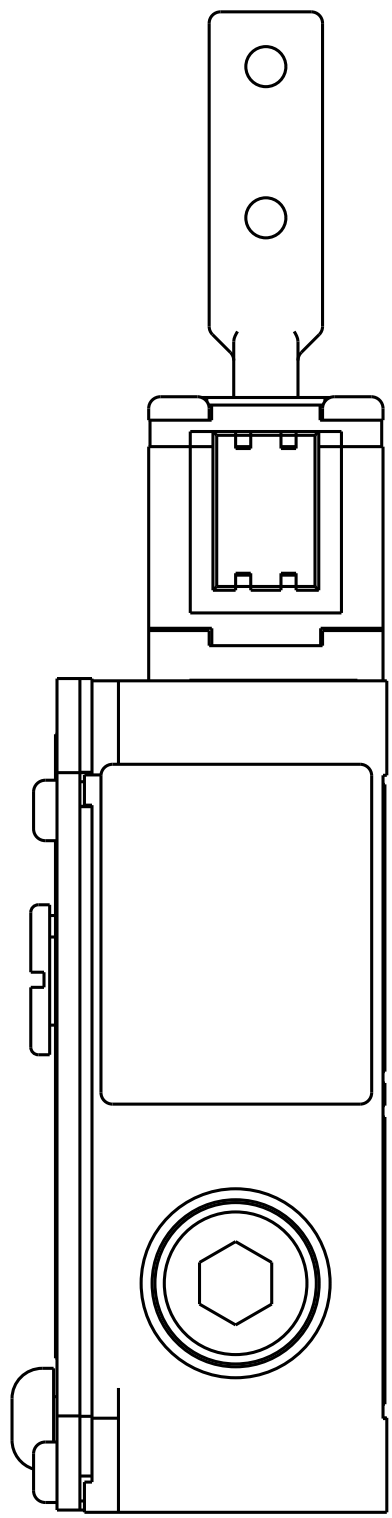


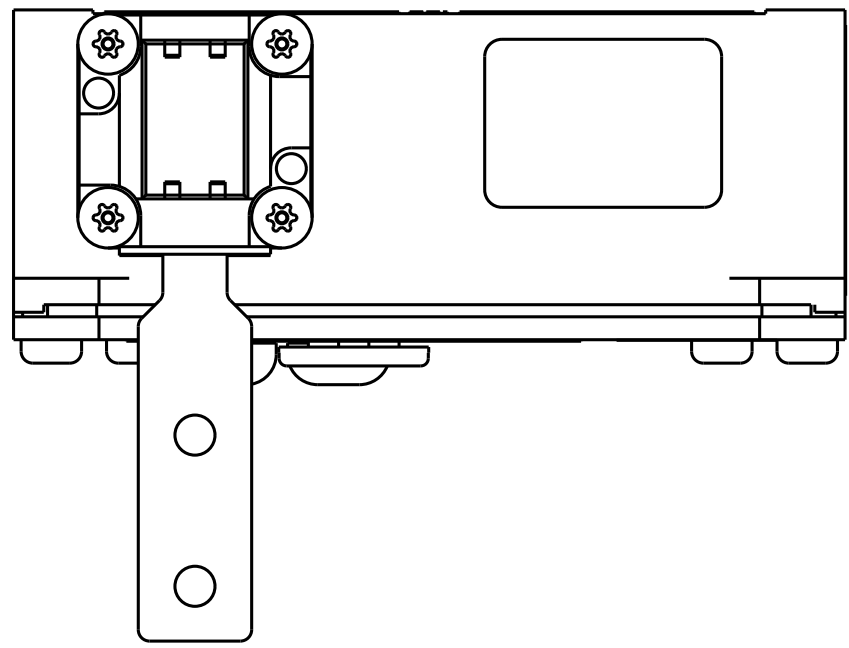


WITH KEY IN FRONT ENTRY POSITION

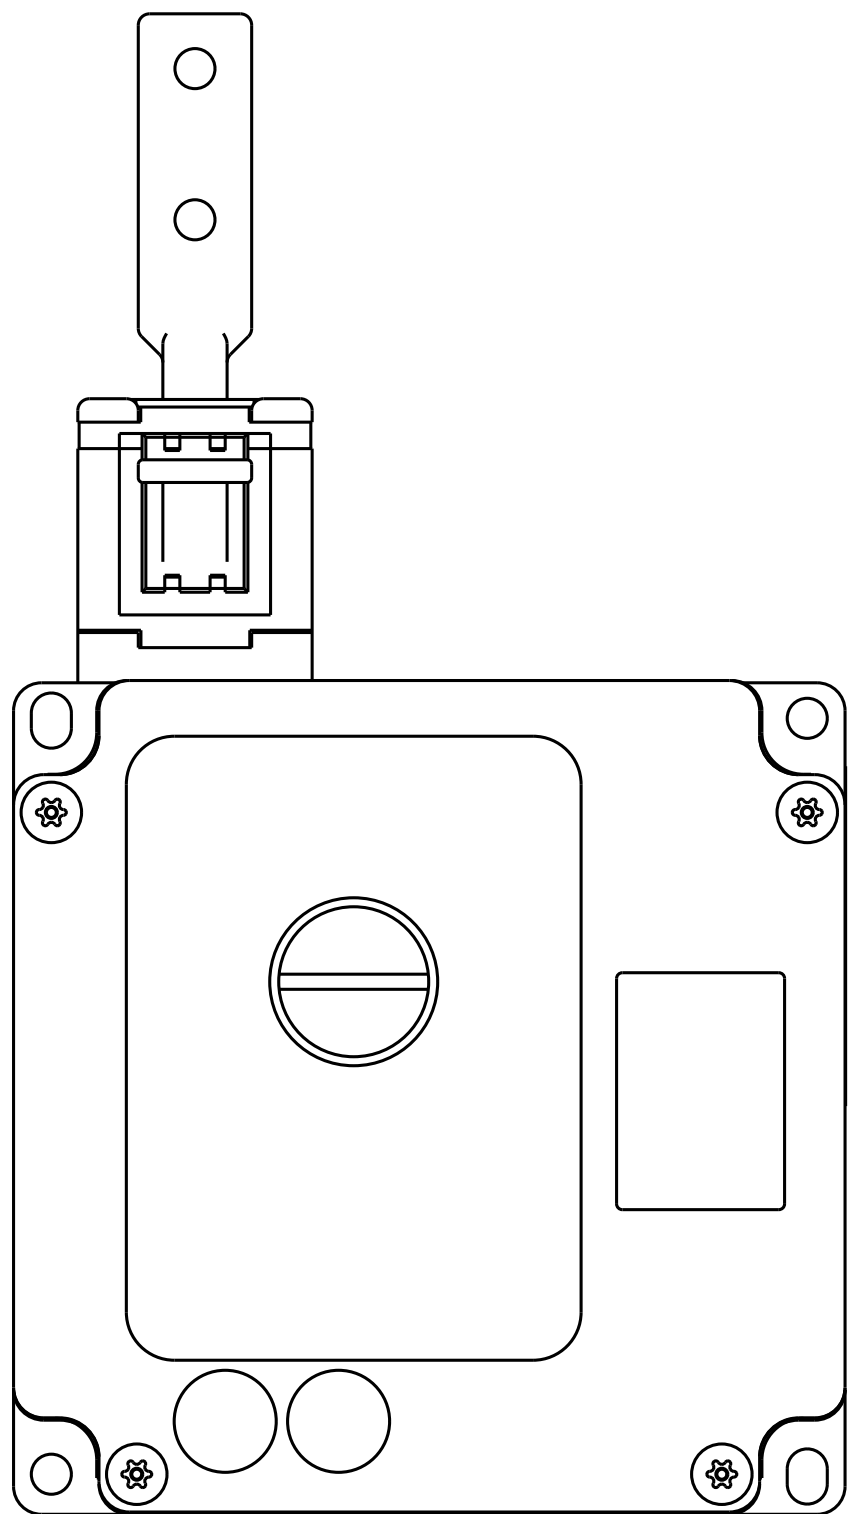


WITH KEY IN TOP ENTRY POSITION

HEAD CODE N

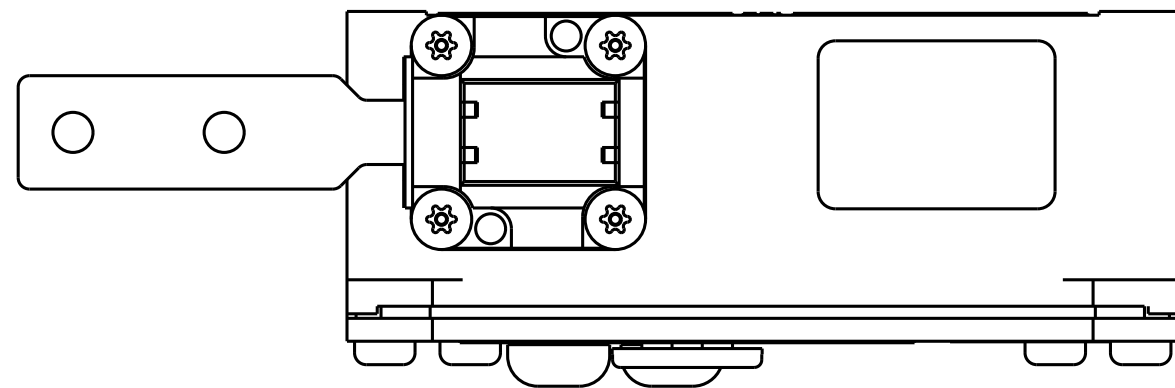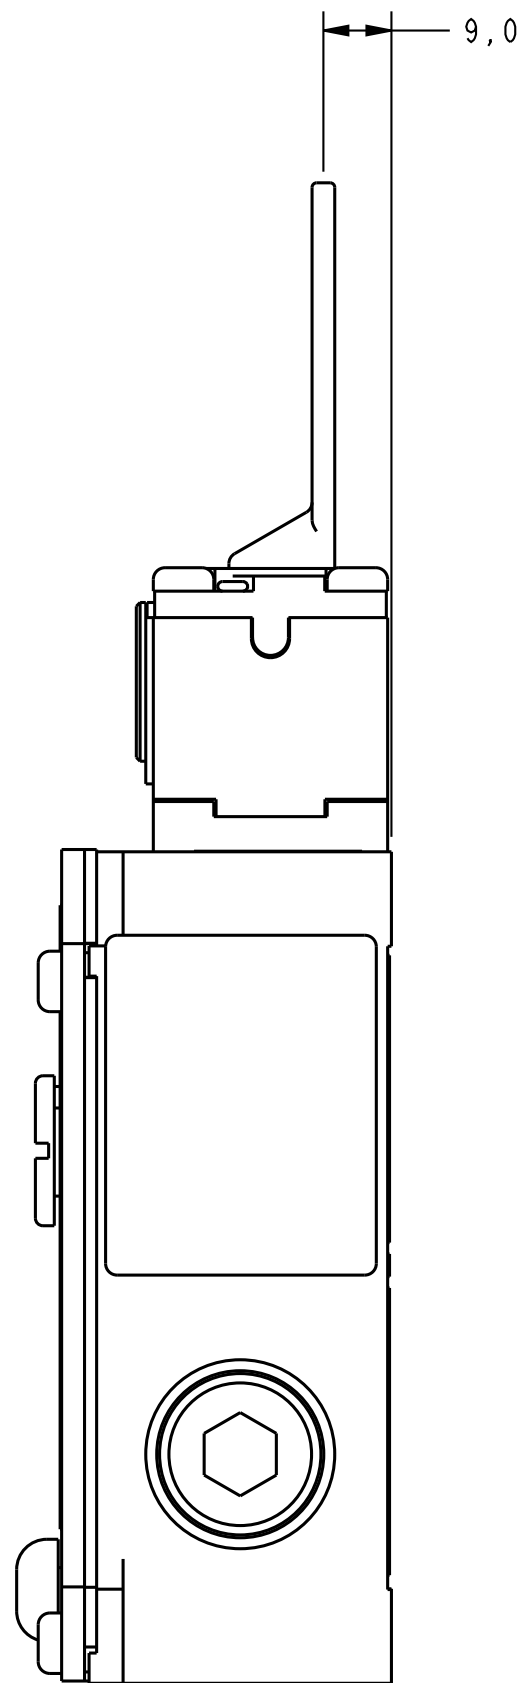


WITH KEY IN FRONT ENTRY POSITION

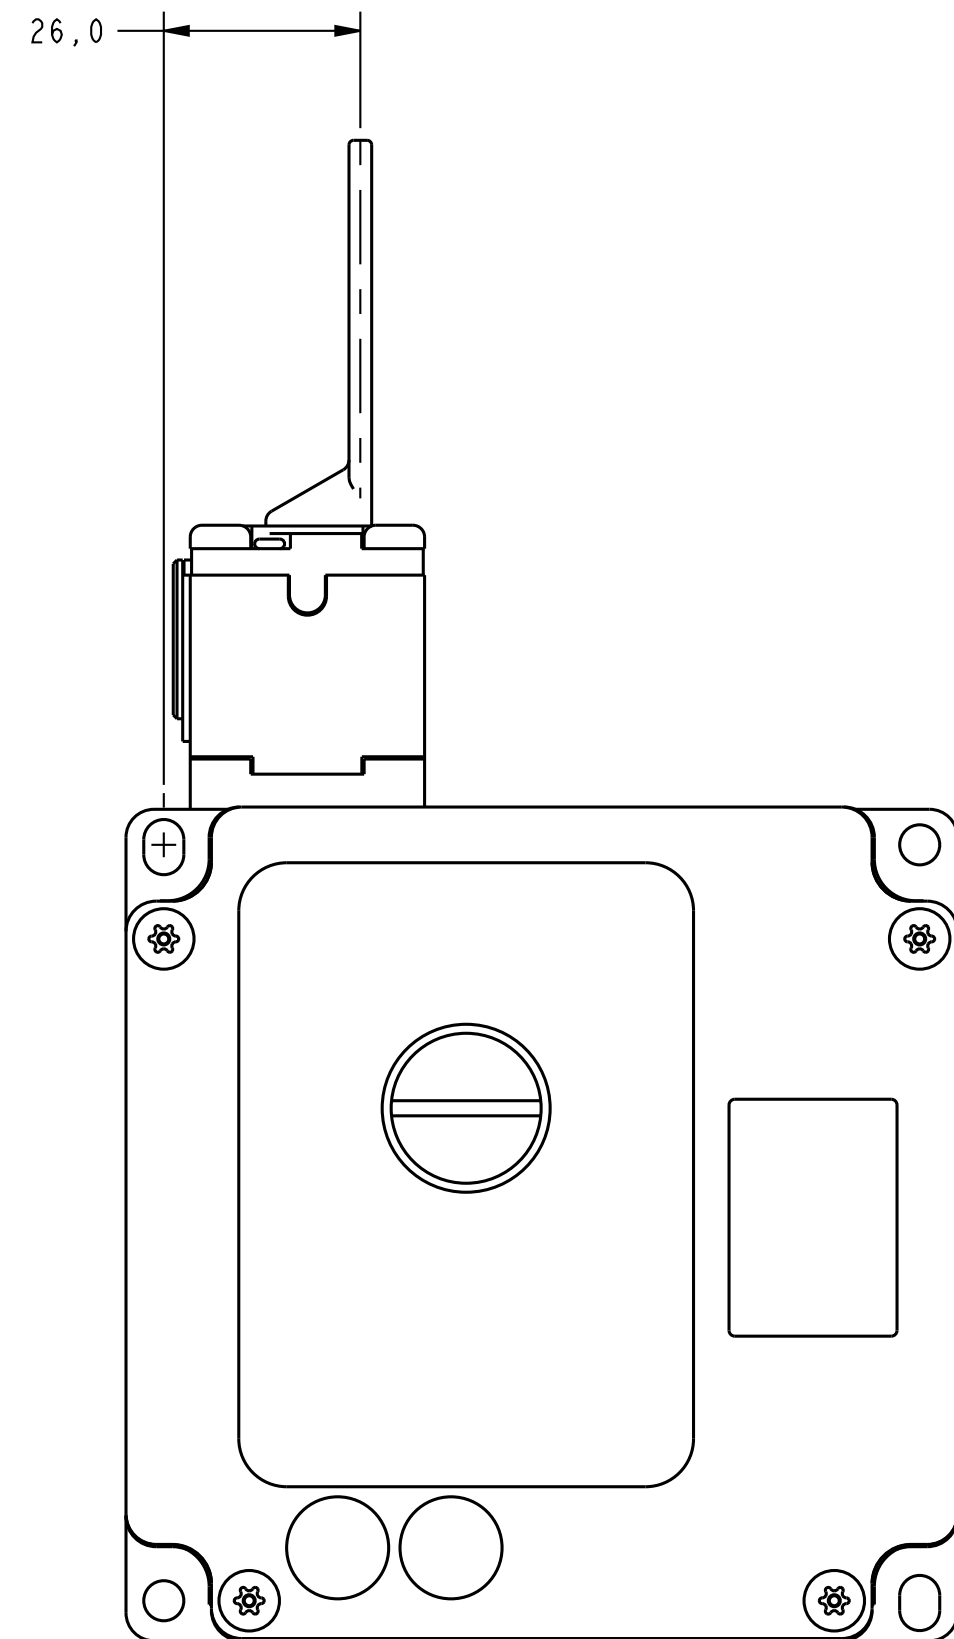

WITH KEY IN TOP ENTRY POSITION

HEAD CODE P







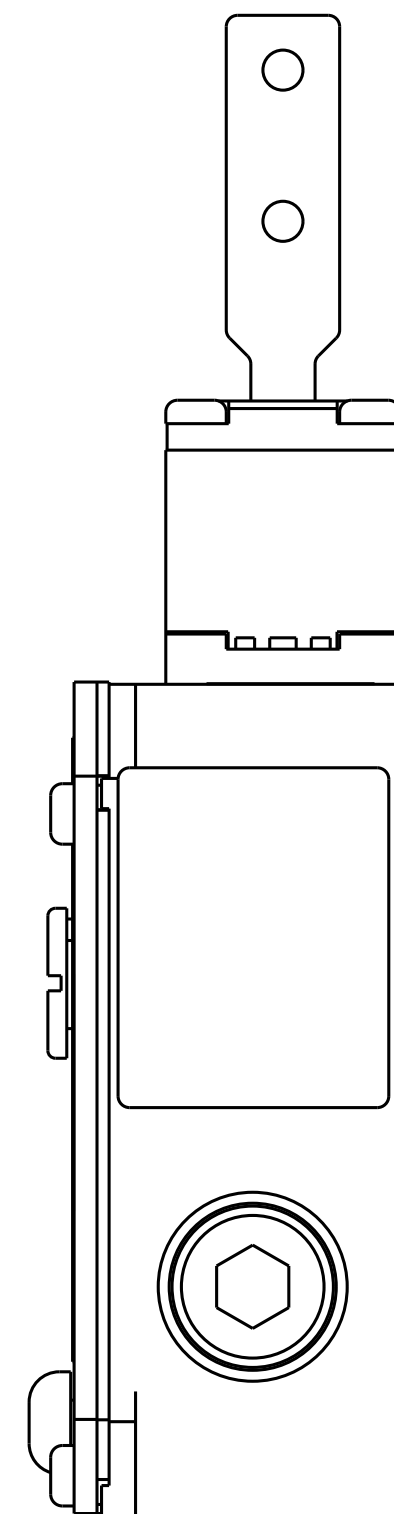


PTC/CAD 3D	MAW	30SEP88	check	CMH	12MAY93	check	PRS	04FEB09	check	CMH	10NOV11	RELEASE NO. PR-23758	PAGE 5 OF 16	ISSUE 5254	DRAWING NUMBER	REPLACES
REVISIONS																
1	M	0447583														
2	S	04FEB89														
3	P	0065737														
4	R	0083576														
5	M	10NOV11														

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		SWITCH - DOOR INTERLOCK	
MICRO SWITCH a Honeywell Division		GK SERIES CHART 4	
DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB	

THIRD ANGLE PROJECTION			
SCALE 1:1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE 1			
NO PLACES	INCH	TOL.	MM
ONE PLACE	1/16	0.04	1.0
TWO PLACES	1/32	0.015	0.38
THREE PLACES	1/64	0.008	0.13
ANGLES	1/16	0.04	1.0

KEY CODE 6

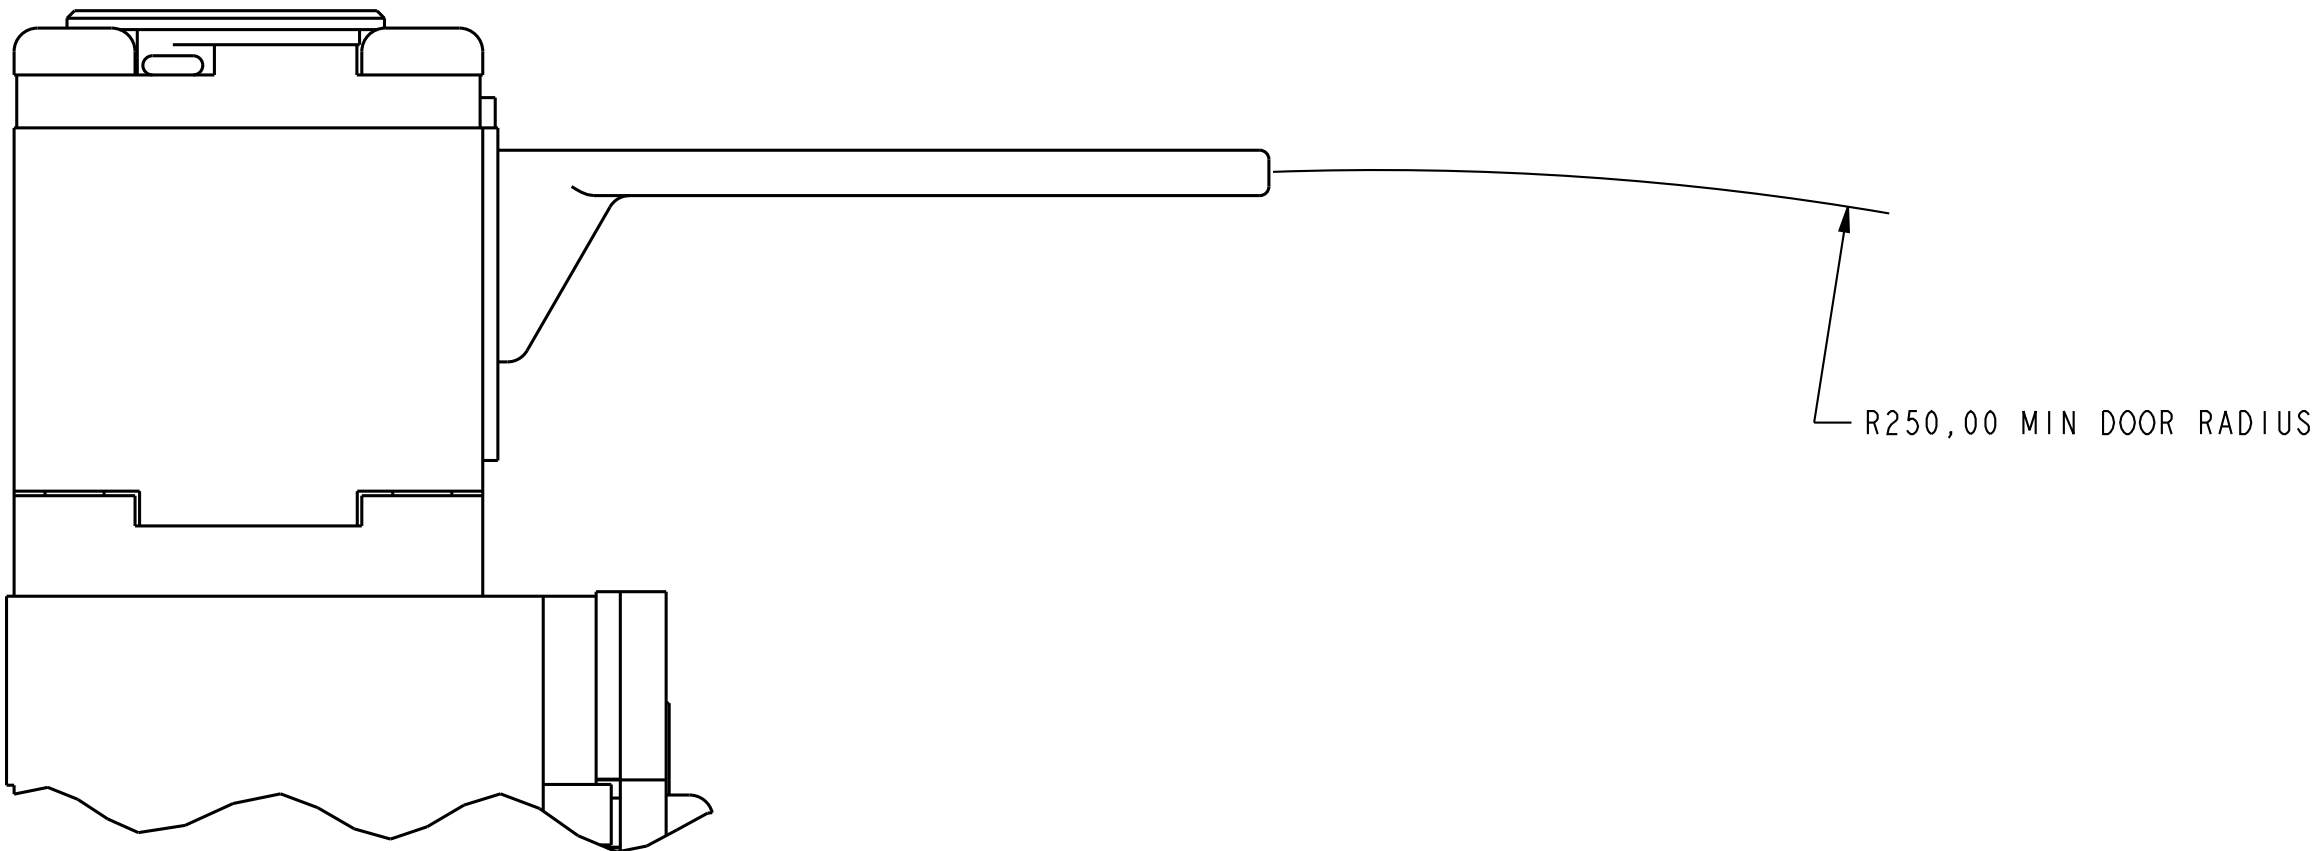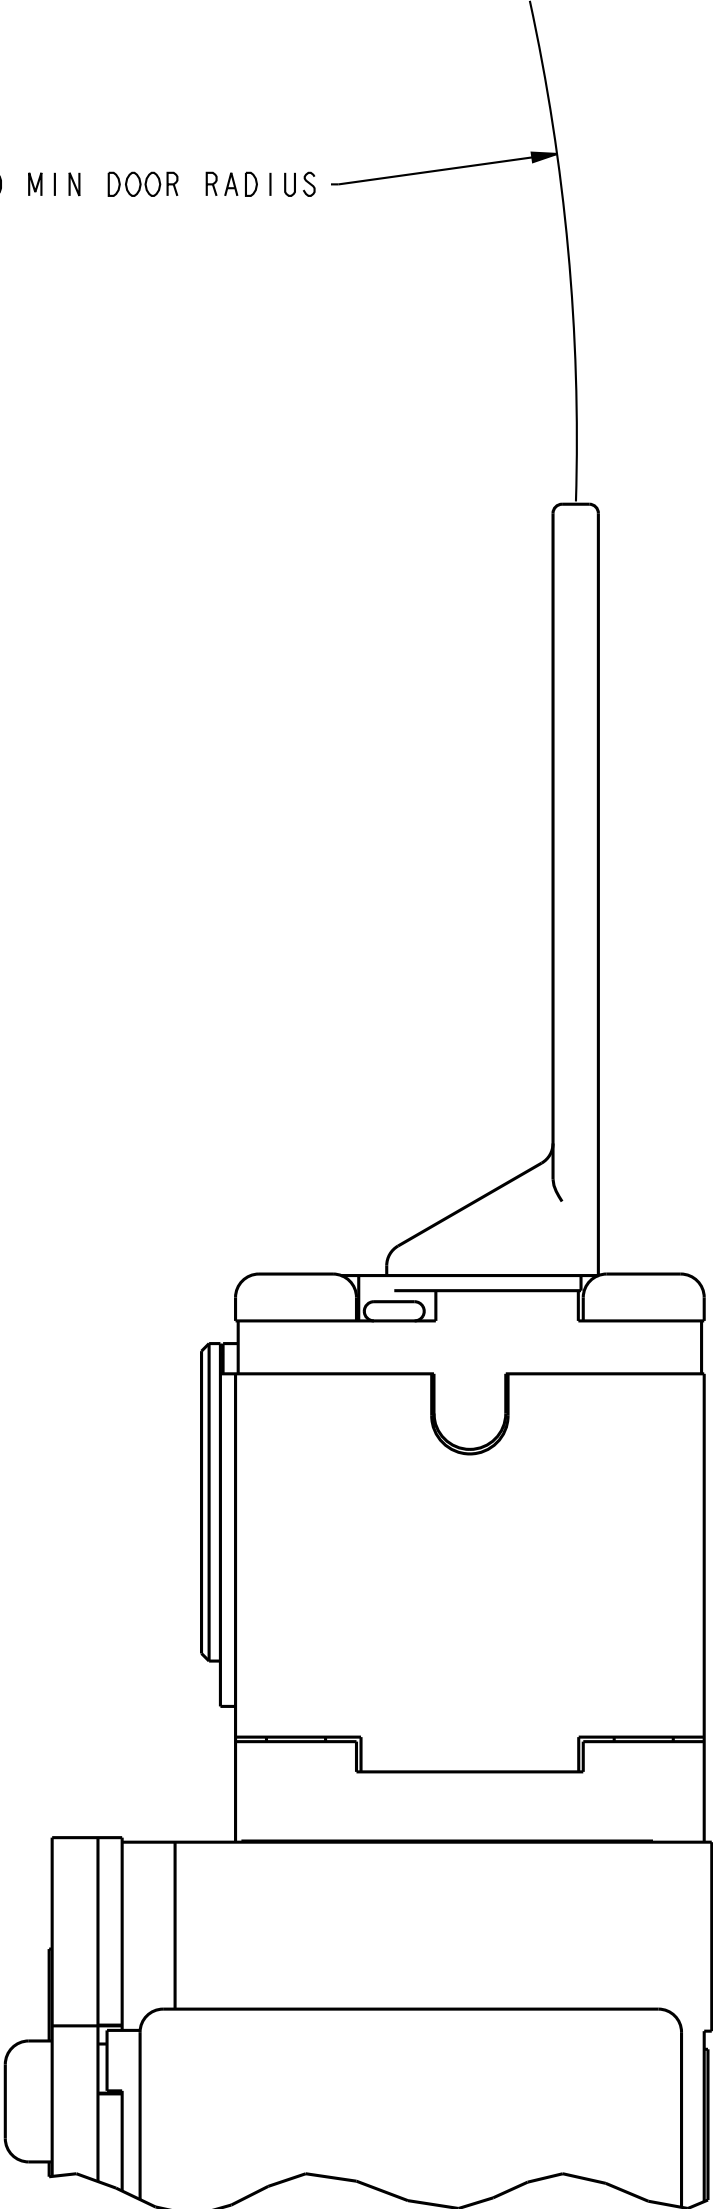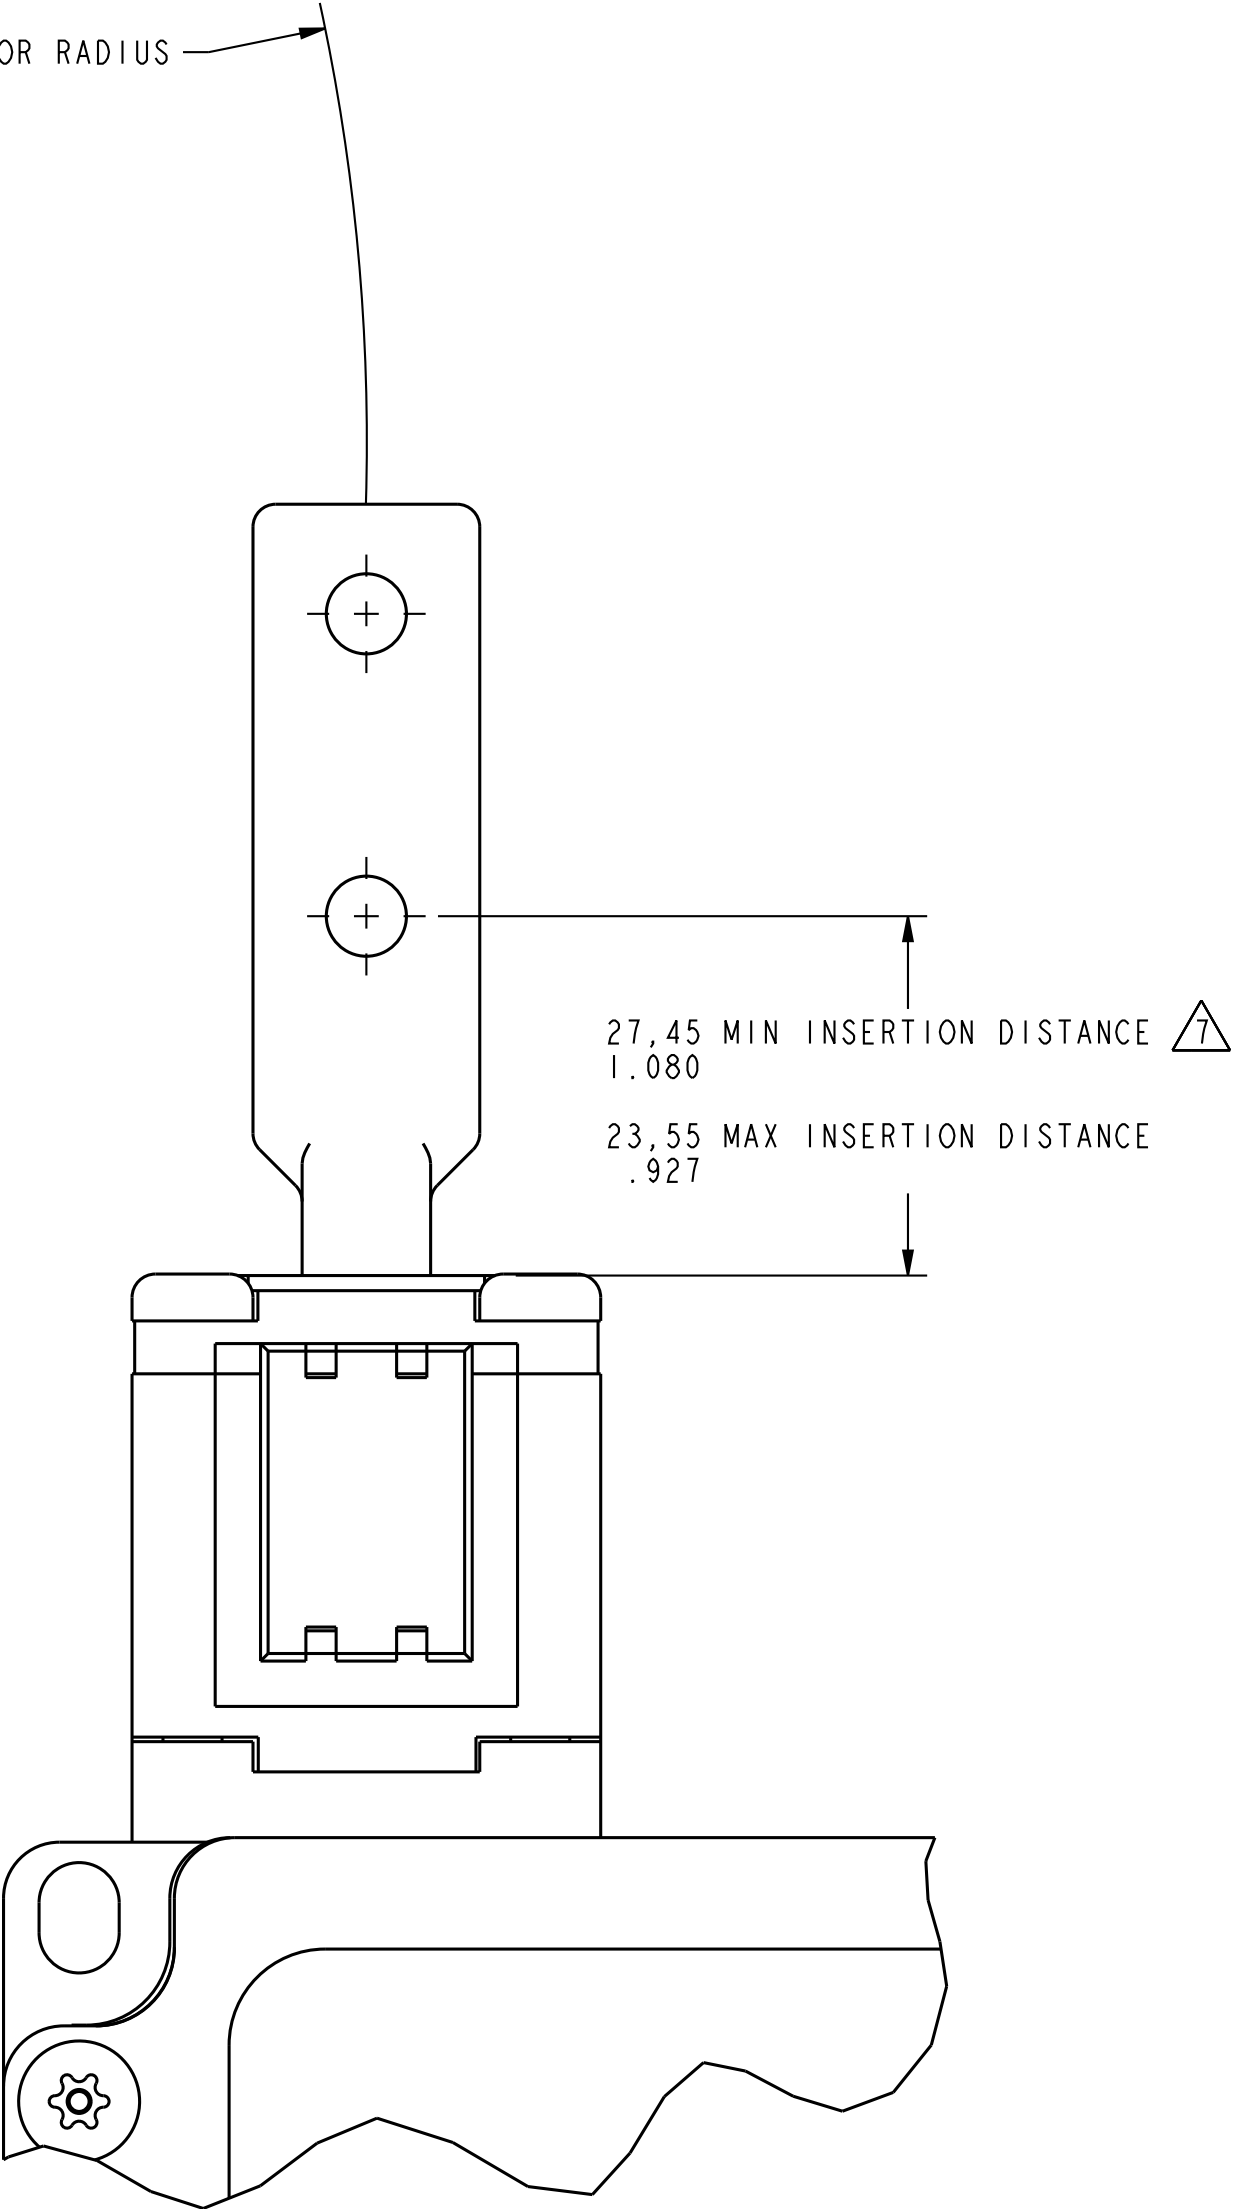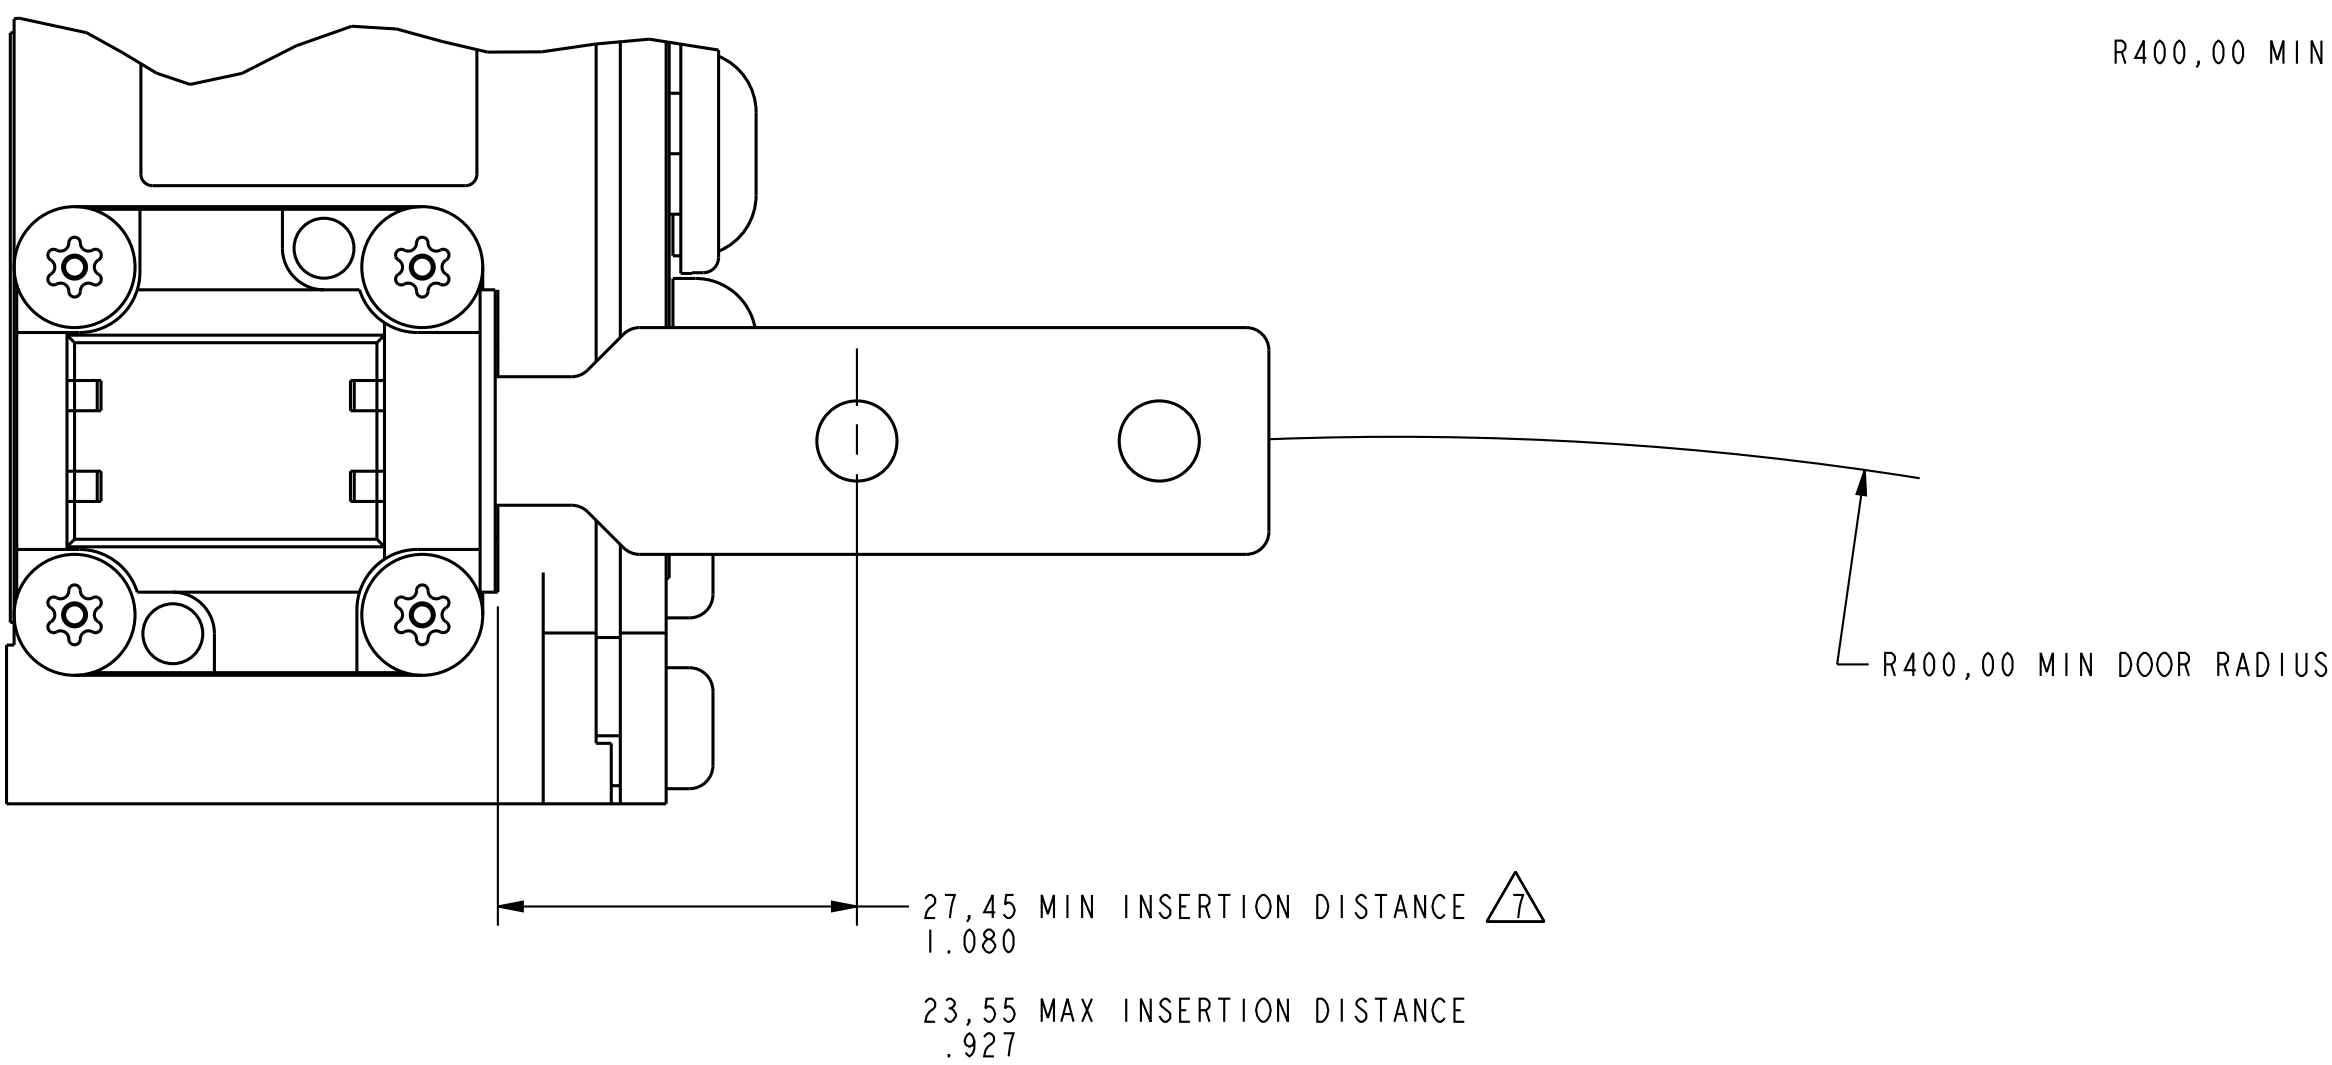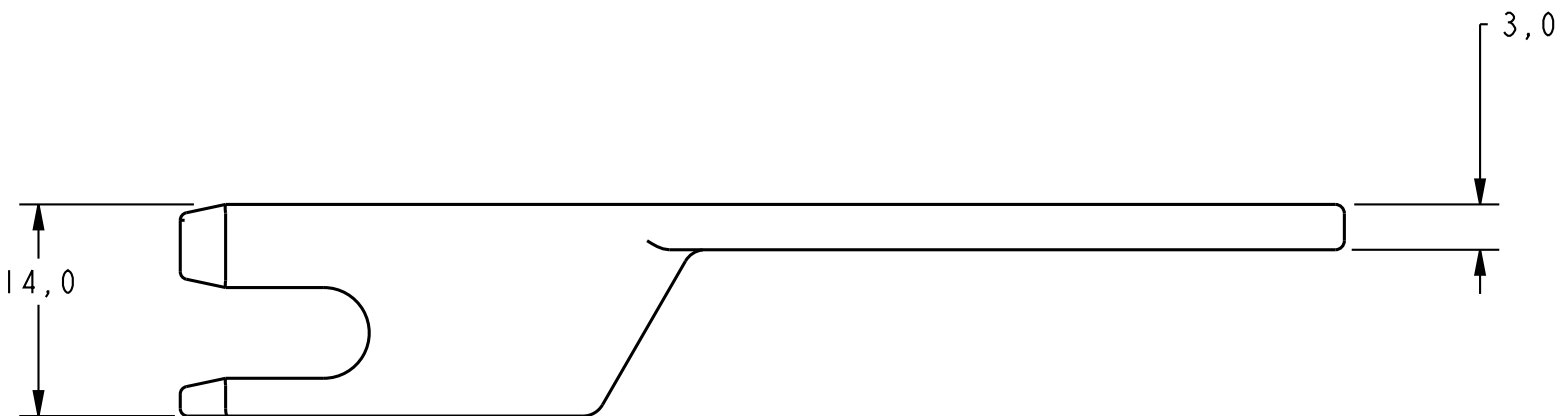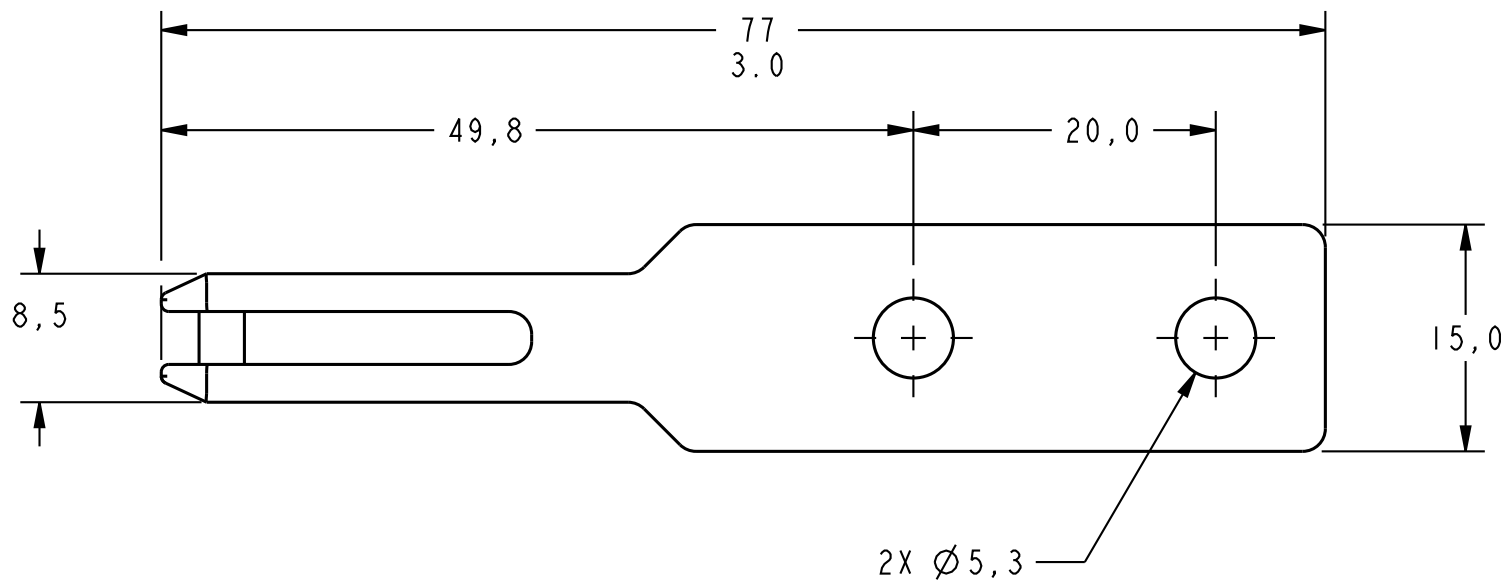


FRONT KEY ENTRY



TOP KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				CATALOG LISTING			
FED. MFG. CODE 91929		MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK		GK SERIES CHART 4	
DESIGN UNITS		SI METRIC		US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB	
NO PLACES		TOL.		TOL.		TOL.	
ONE PLACE		0.125		0.005		0.005	
TWO PLACES		0.015		0.002		0.002	
THREE PLACES		0.002		0.001		0.001	
ANGLES		0.125		0.005		0.005	



KEY CODE 7

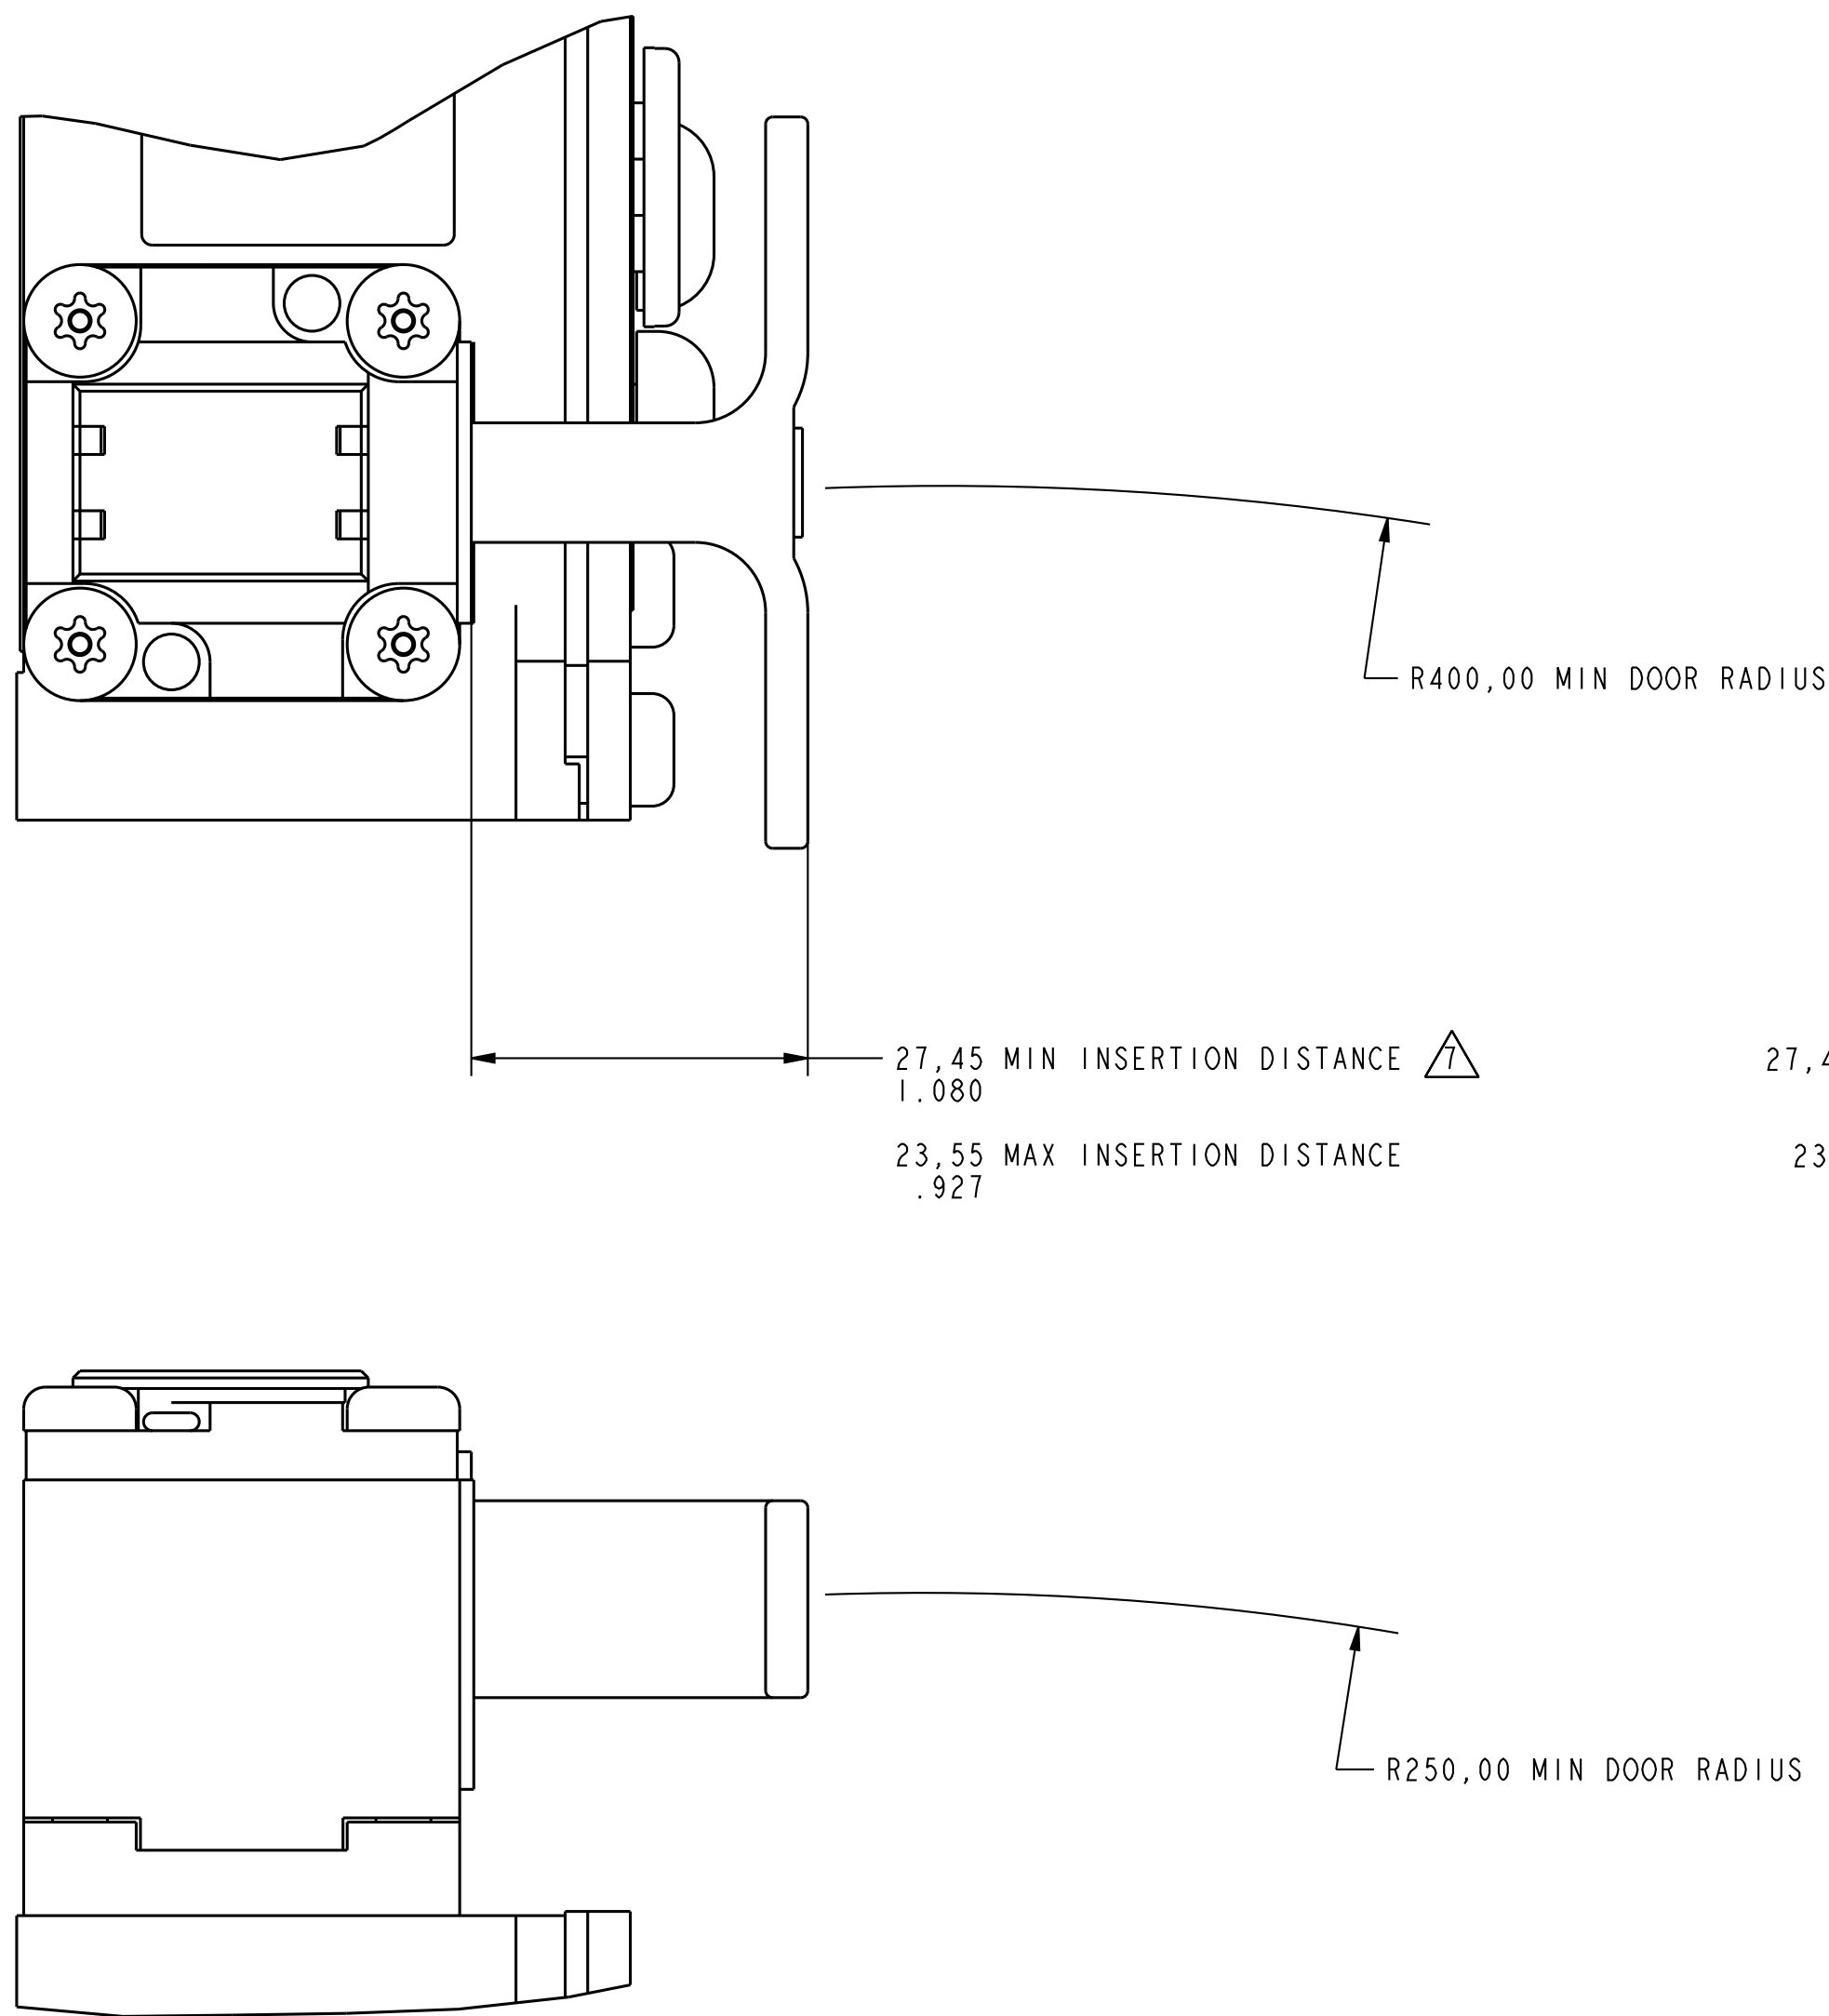

FRONT KEY ENTRY

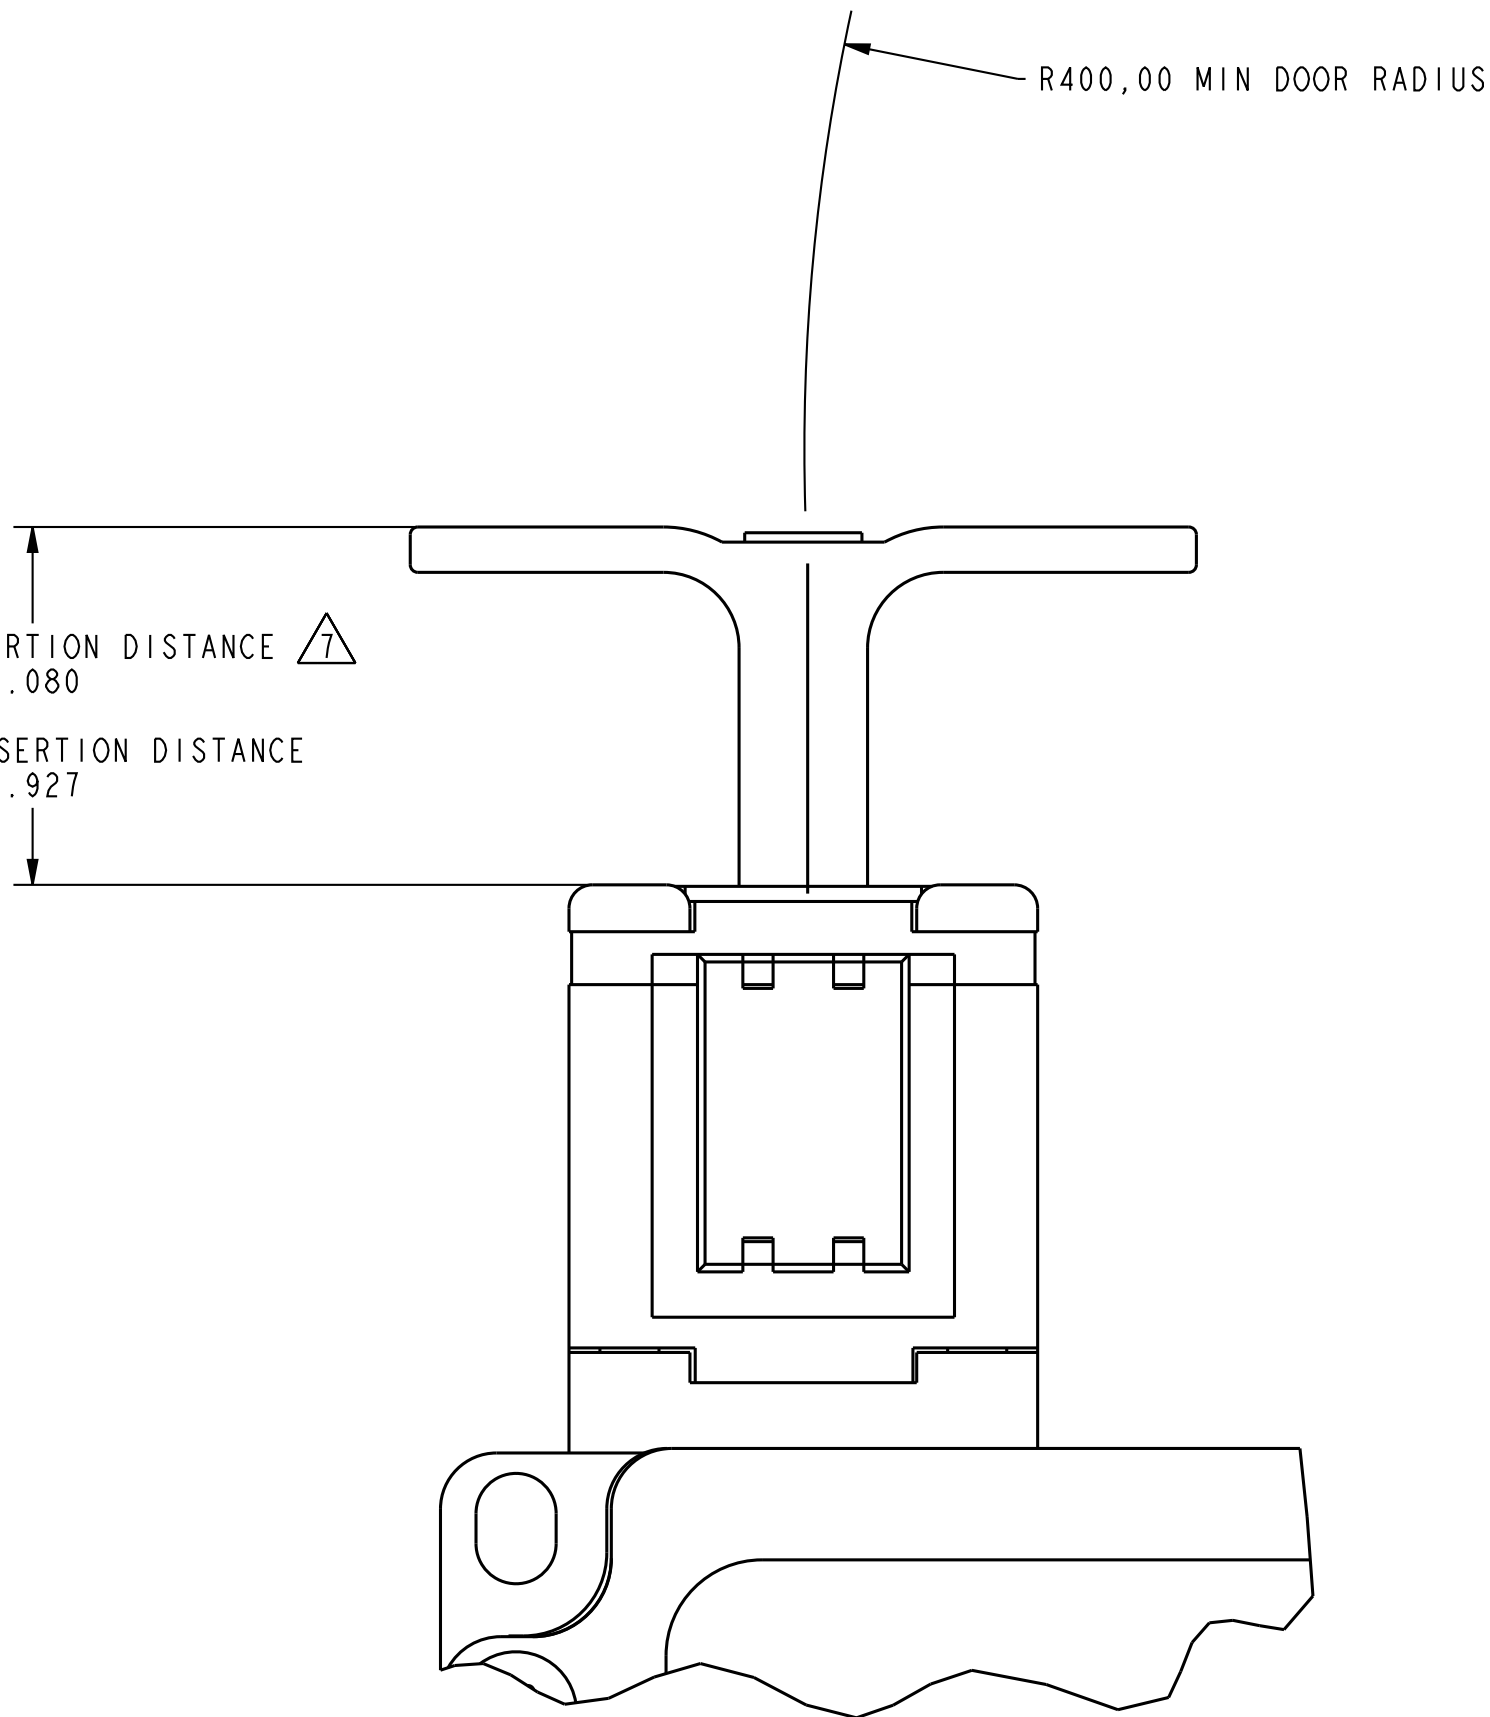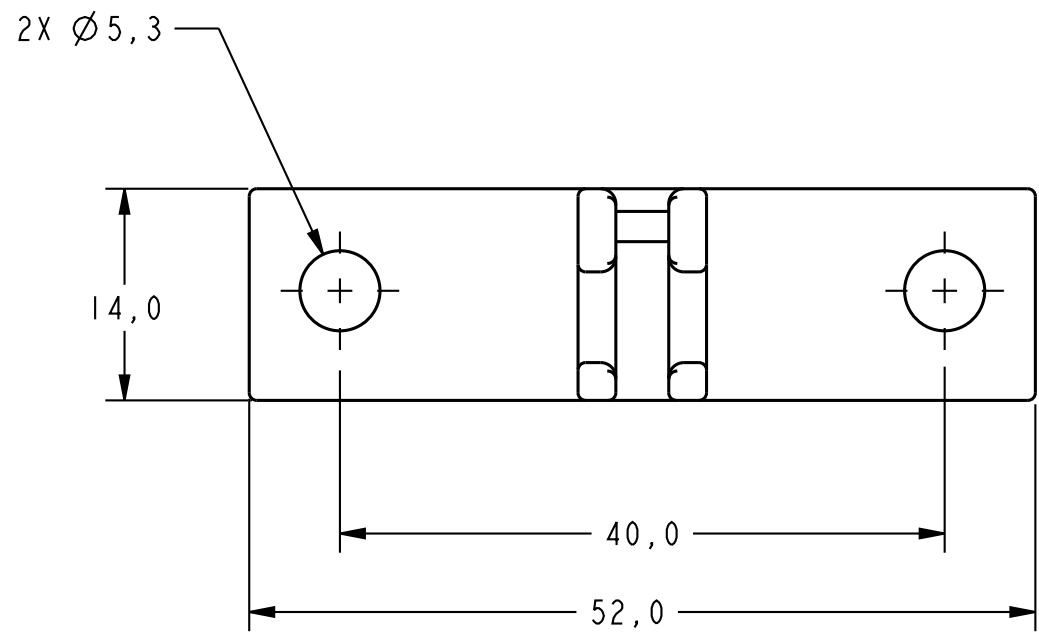

TOP KEY ENTRY

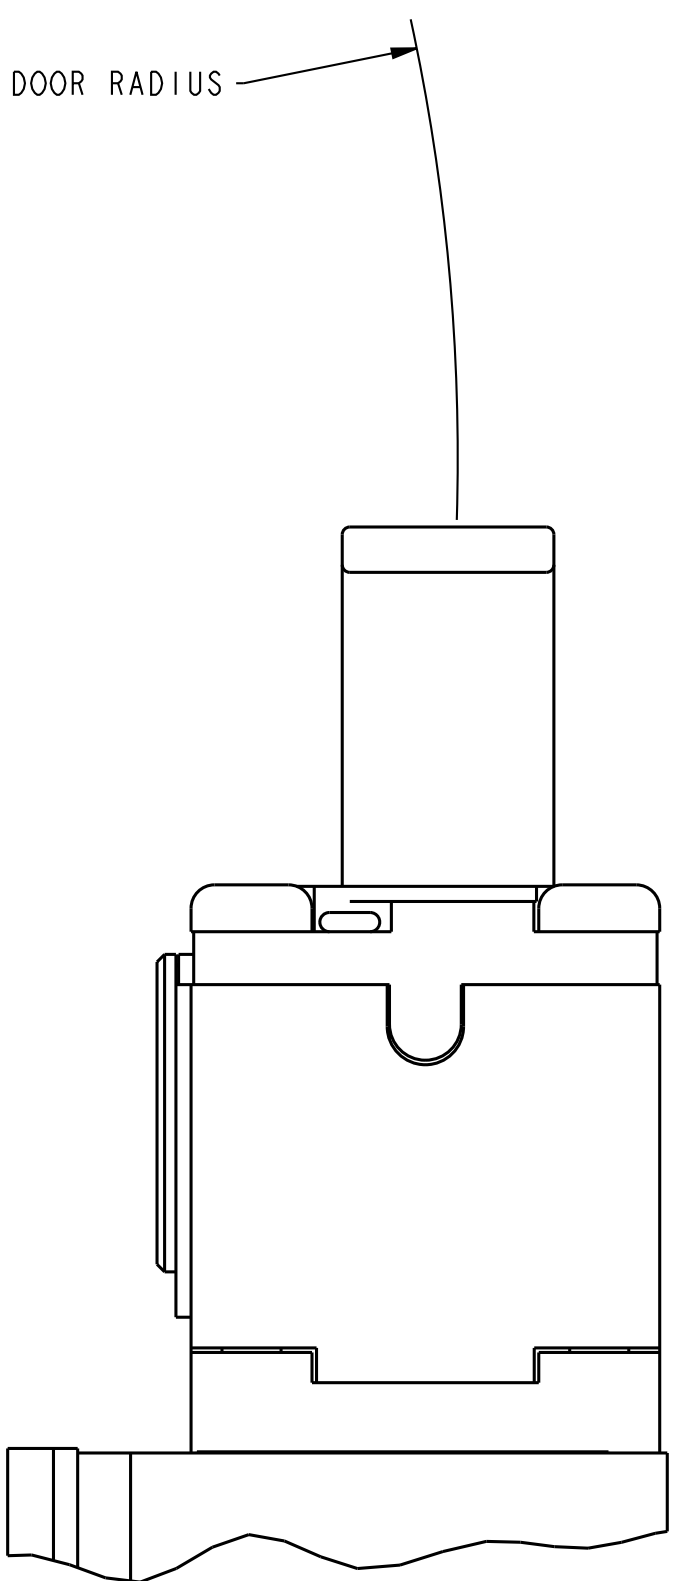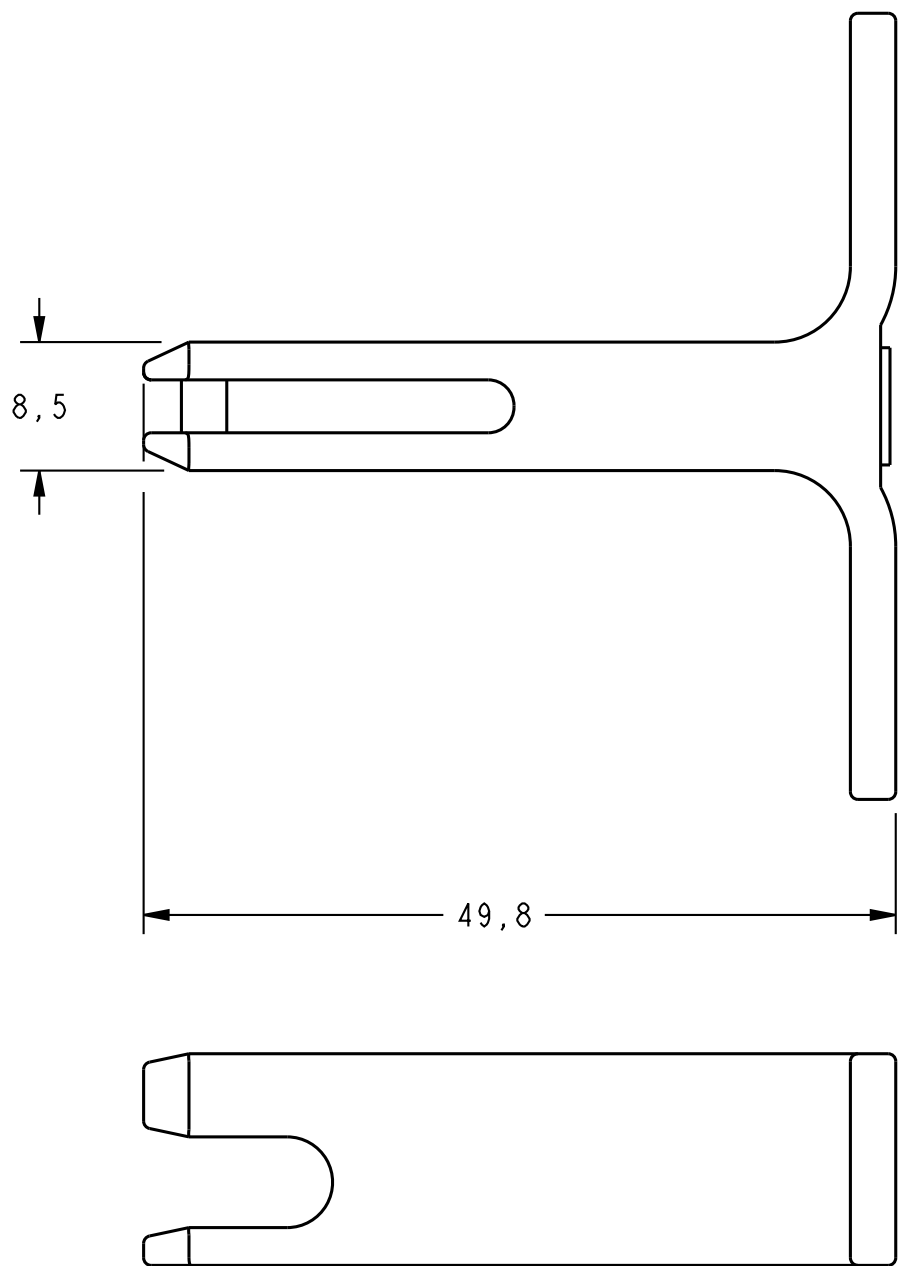




THIRD ANGLE PROJECTION			
SCALE 2 : 1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	2	1/16	2.2
ONE PLACE	1/16	0.0156	0.39
TWO PLACES	1/32	0.0031	0.08
THREE PLACES	1/64	0.0016	0.04
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT	1,5 KG / 3,3 LB		

PTC/CAD 3D	DATE	LOC 98	CHECK	CMH	12MAY98	CHECK	CMH	04FEB09	CHECK	CMH	10NOV11	RELEASE NO. PR-23758	PAGE 7 OF 16	ISSUE 5254	DRAWING NUMBER	REPLACES


REVISIONS	DATE	BY	CHKD	APPD
1	04FEB09	SS		
2	04FEB09	SS		
3	04FEB09	SS		
4	04FEB09	SS		
5	04FEB09	SS		
6	04FEB09	SS		
7	04FEB09	SS		
8	04FEB09	SS		
9	04FEB09	SS		
10	04FEB09	SS		
11	04FEB09	SS		
12	04FEB09	SS		
13	04FEB09	SS		
14	04FEB09	SS		
15	04FEB09	SS		
16	04FEB09	SS		
17	04FEB09	SS		
18	04FEB09	SS		
19	04FEB09	SS		
20	04FEB09	SS		
21	04FEB09	SS		
22	04FEB09	SS		
23	04FEB09	SS		
24	04FEB09	SS		
25	04FEB09	SS		
26	04FEB09	SS		
27	04FEB09	SS		
28	04FEB09	SS		
29	04FEB09	SS		
30	04FEB09	SS		
31	04FEB09	SS		
32	04FEB09	SS		
33	04FEB09	SS		
34	04FEB09	SS		
35	04FEB09	SS		
36	04FEB09	SS		
37	04FEB09	SS		
38	04FEB09	SS		
39	04FEB09	SS		
40	04FEB09	SS		
41	04FEB09	SS		
42	04FEB09	SS		
43	04FEB09	SS		
44	04FEB09	SS		
45	04FEB09	SS		
46	04FEB09	SS		
47	04FEB09	SS		
48	04FEB09	SS		
49	04FEB09	SS		
50	04FEB09	SS		
51	04FEB09	SS		
52	04FEB09	SS		
53	04FEB09	SS		
54	04FEB09	SS		
55	04FEB09	SS		
56	04FEB09	SS		
57	04FEB09	SS		
58	04FEB09	SS		
59	04FEB09	SS		
60	04FEB09	SS		
61	04FEB09	SS		
62	04FEB09	SS		
63	04FEB09	SS		
64	04FEB09	SS		
65	04FEB09	SS		
66	04FEB09	SS		
67	04FEB09	SS		
68	04FEB09	SS		
69	04FEB09	SS		
70	04FEB09	SS		
71	04FEB09	SS		
72	04FEB09	SS		
73	04FEB09	SS		
74	04FEB09	SS		
75	04FEB09	SS		
76	04FEB09	SS		
77	04FEB09	SS		
78	04FEB09	SS		
79	04FEB09	SS		
80	04FEB09	SS		
81	04FEB09	SS		
82	04FEB09	SS		
83	04FEB09	SS		
84	04FEB09	SS		
85	04FEB09	SS		
86	04FEB09	SS		
87	04FEB09	SS		
88	04FEB09	SS		
89	04FEB09	SS		
90	04FEB09	SS		
91	04FEB09	SS		
92	04FEB09	SS		
93	04FEB09	SS		
94	04FEB09	SS		
95	04FEB09	SS		
96	04FEB09	SS		
97	04FEB09	SS		
98	04FEB09	SS		
99	04FEB09	SS		
100	04FEB09	SS		

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK	
GK SERIES CHART 4		GK SERIES CHART 4	
DESIGN UNITS		SI METRIC	
WEIGHT		1,5 KG / 3,3 LB	


MAK SERIES CHART 4

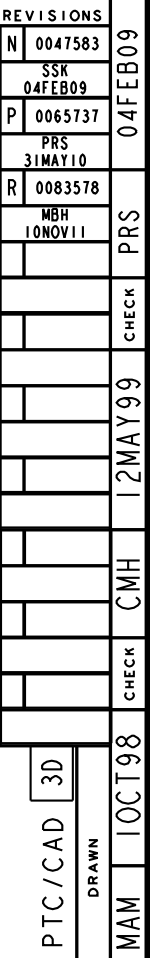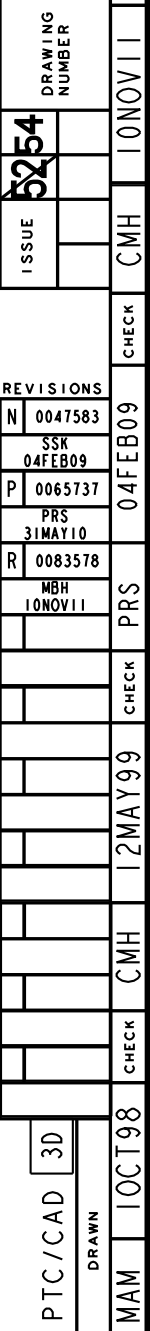

PTC/CAD	DRAWN	MAM	I
---------	-------	-----	---







PT	MA
----	----




PT	MA
----	----

KEY CODE 9

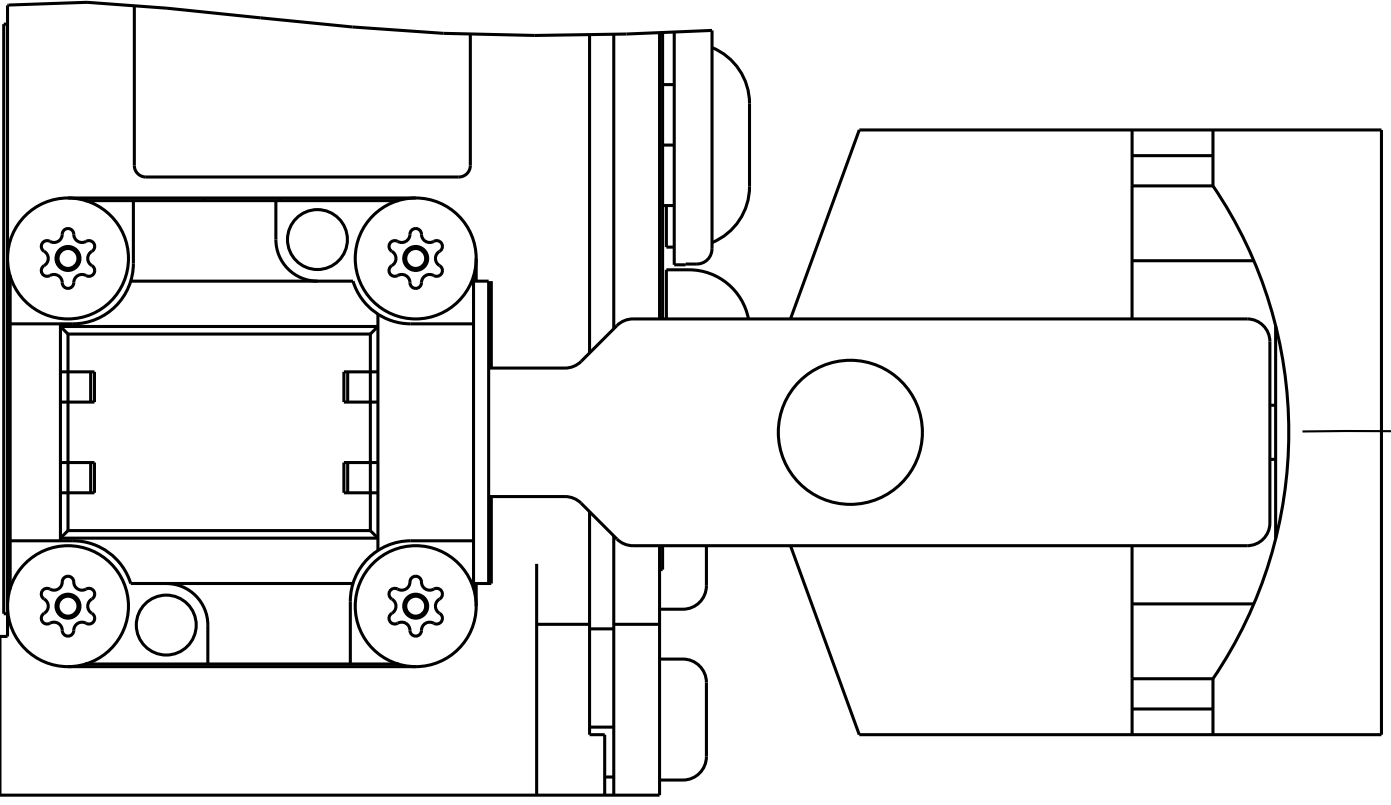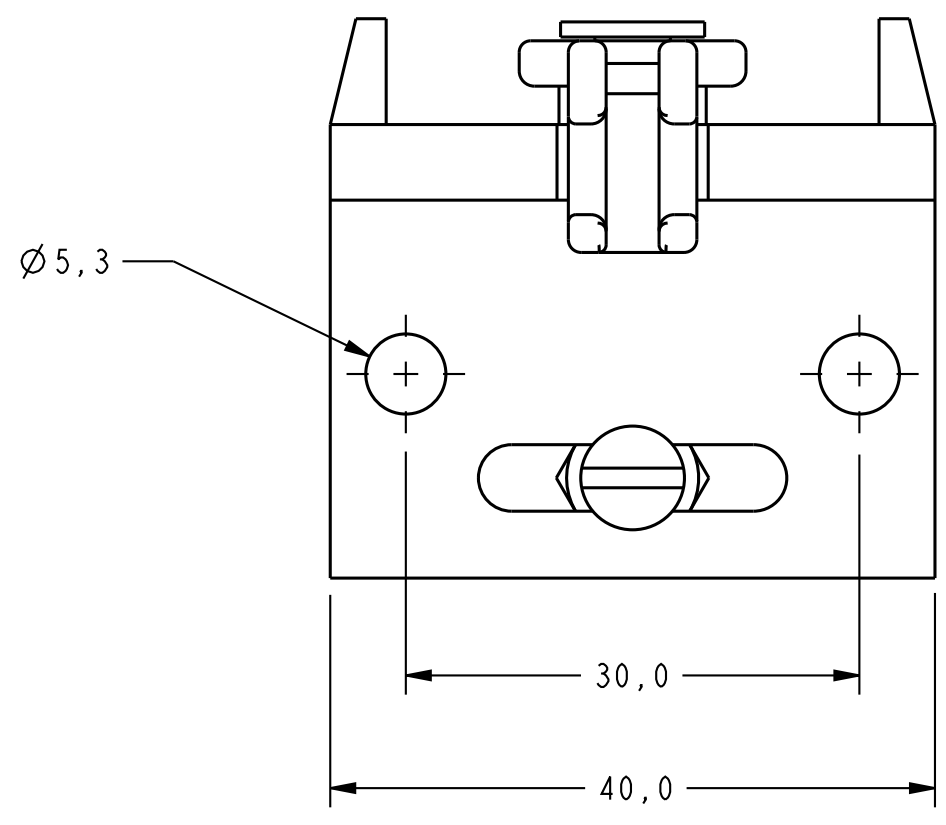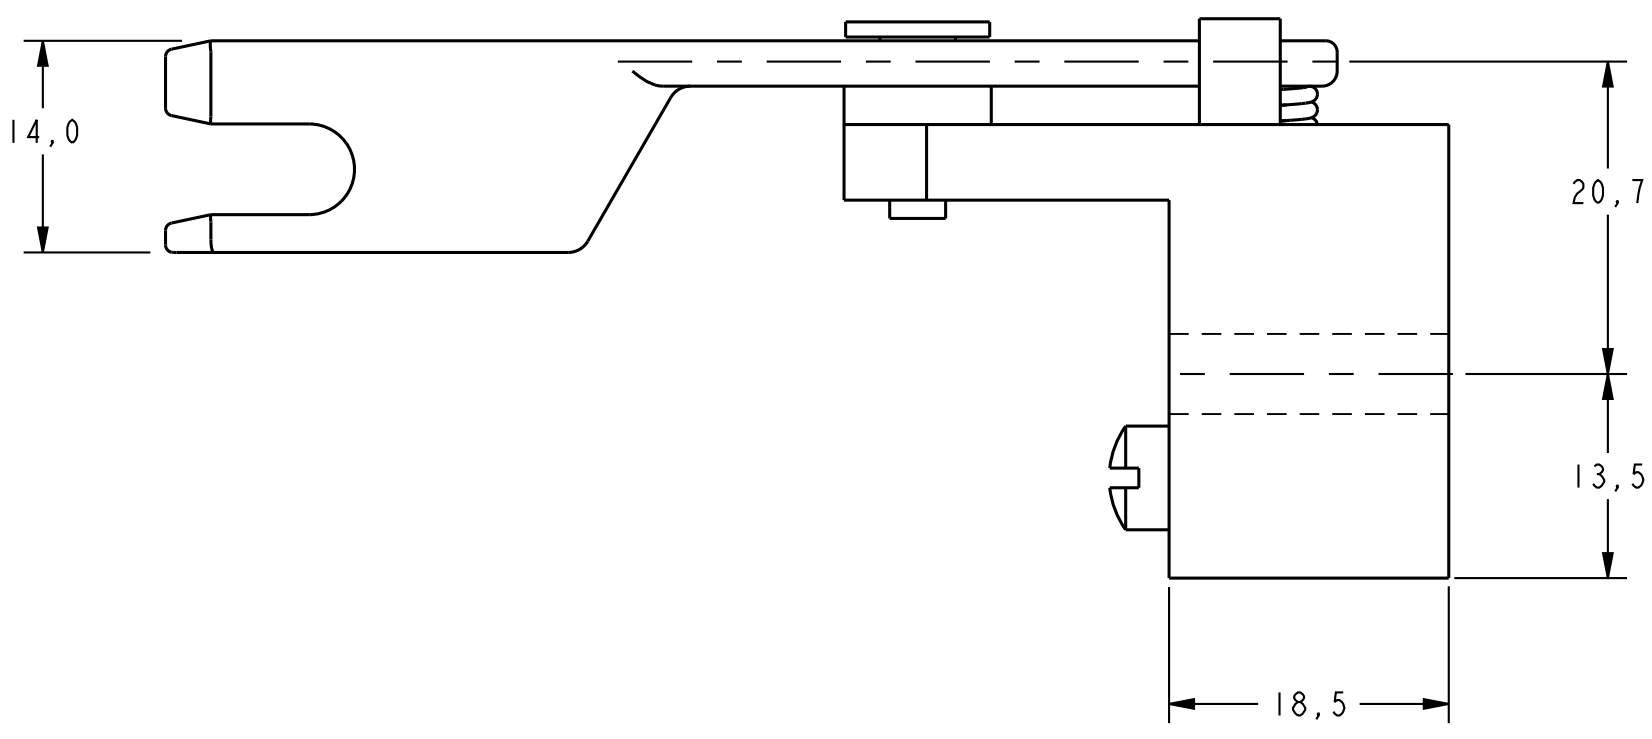
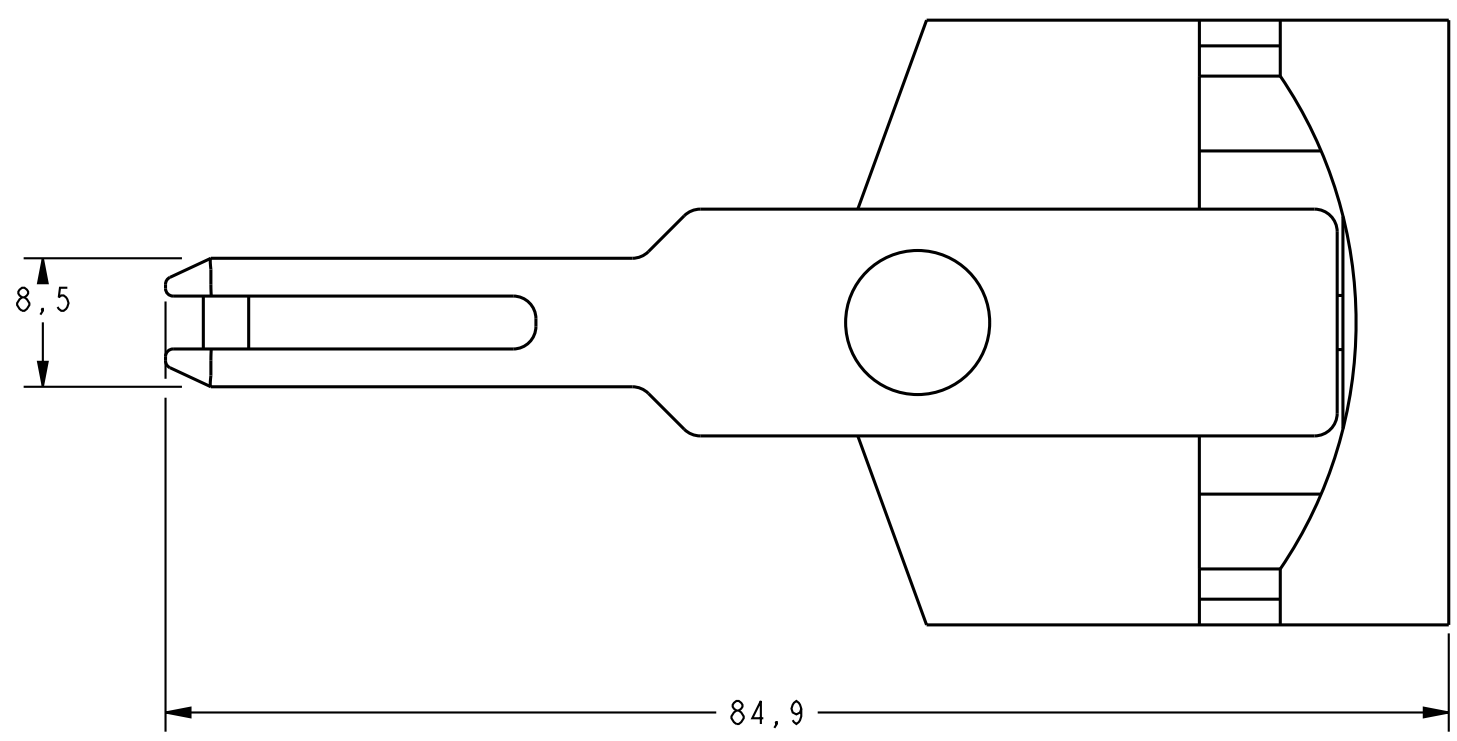


R150,00 MIN DOOR RADIUS

R250,00 MIN DOOR RADIUS

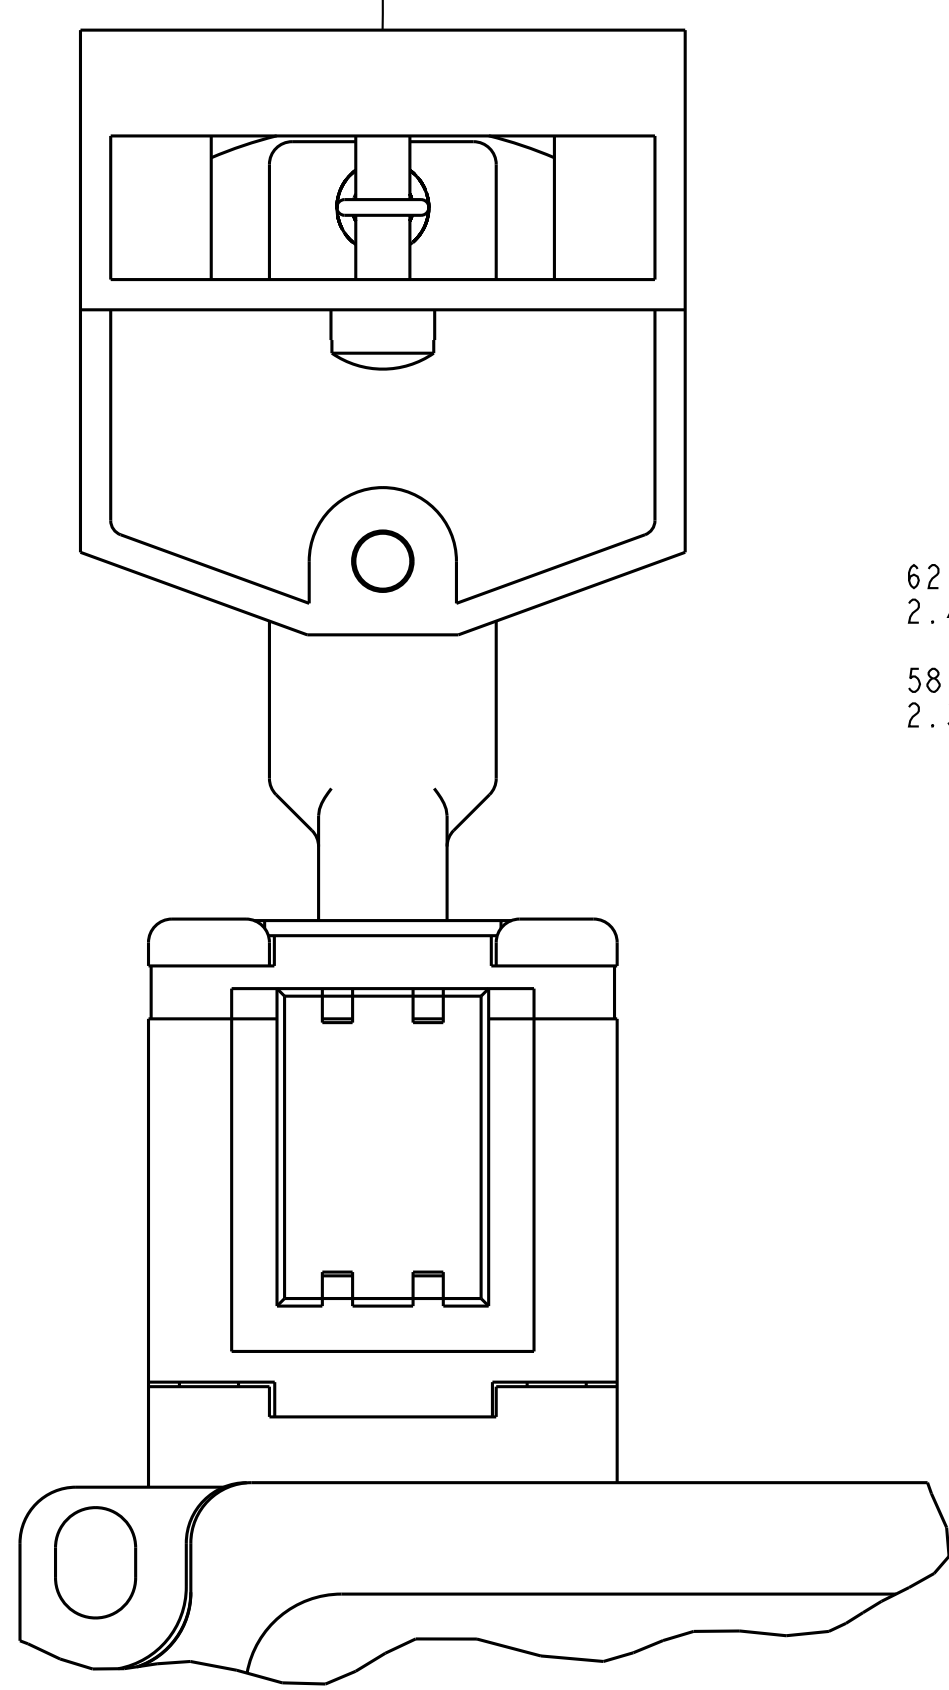

62,58 MIN INSERTION DISTANCE
2.464
58,68 MAX INSERTION DISTANCE
2.310

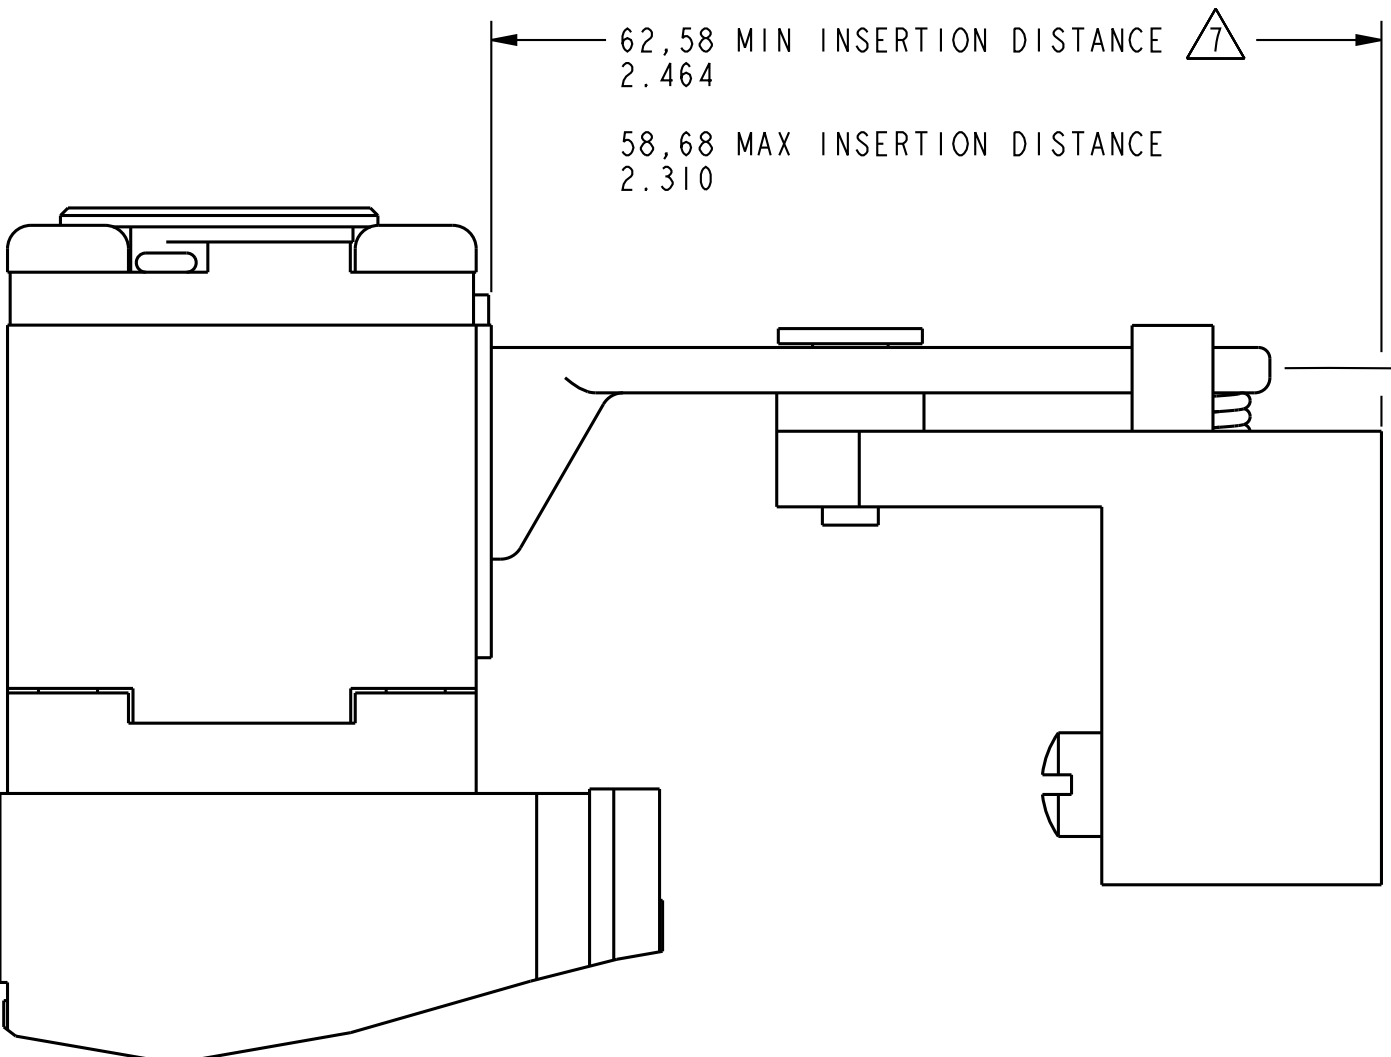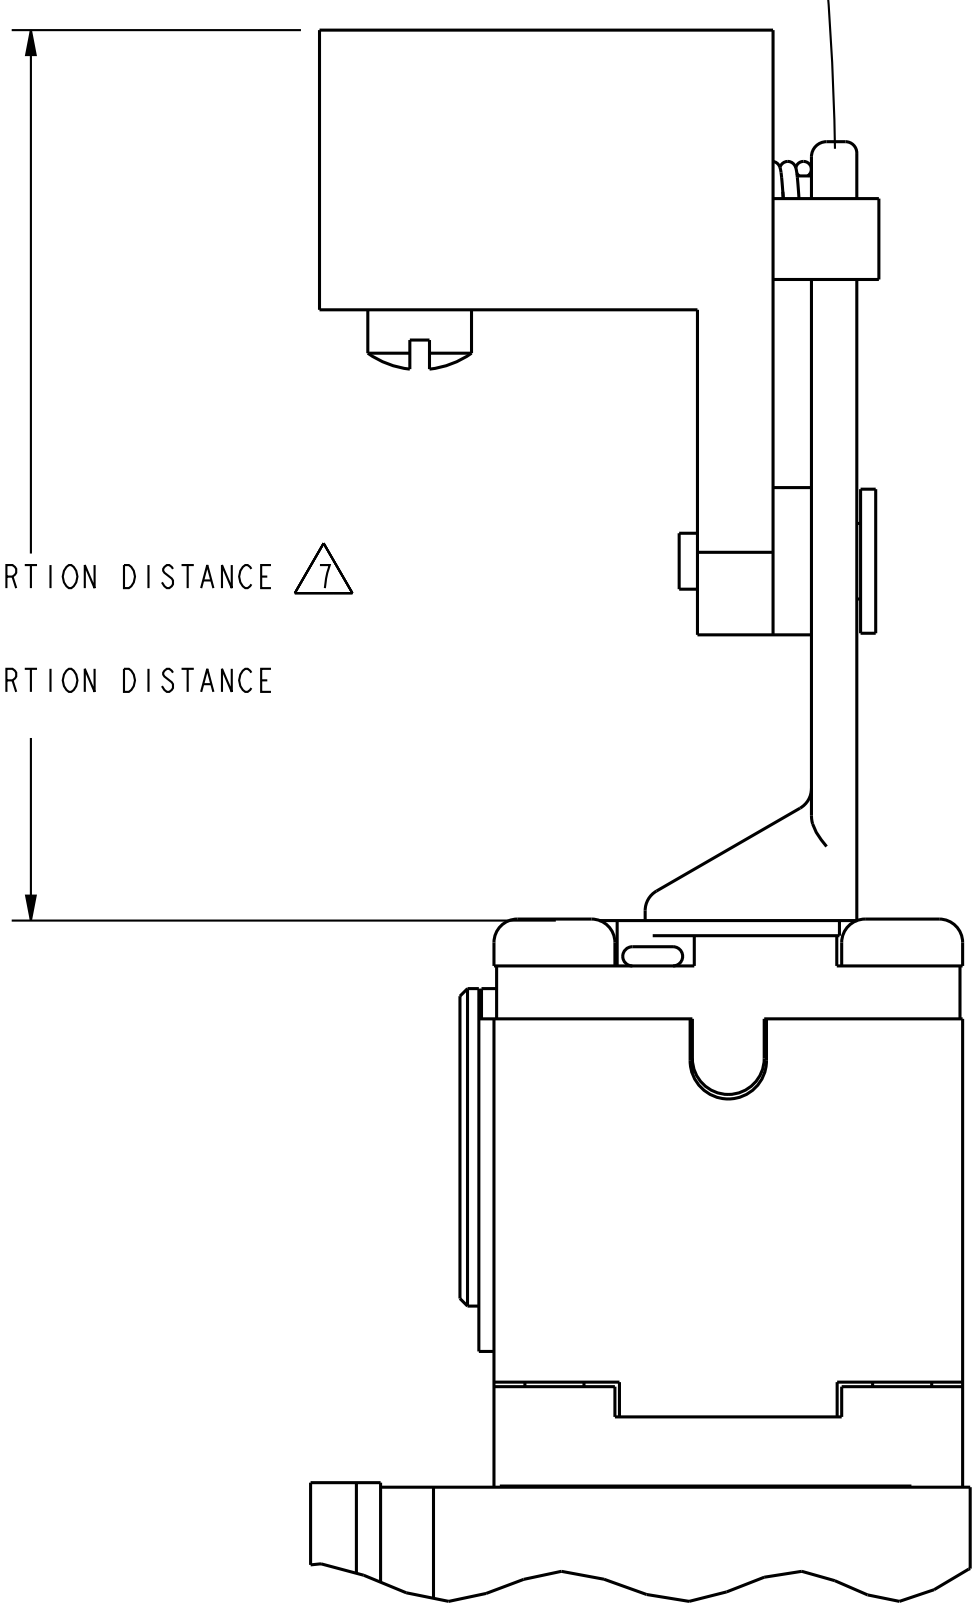


FRONT KEY ENTRY

TOP KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GK SERIES CHART 4	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK	
DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY		WEIGHT 1,5 KG / 3,3 LB	

THIRD ANGLE PROJECTION			
SCALE 2 : 1			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	INCH	TOL.	MM
ONE PLACE	1/16	0,04	1,0
TWO PLACES	1/32	0,0156	0,38
THREE PLACES	1/64	0,0078	0,19

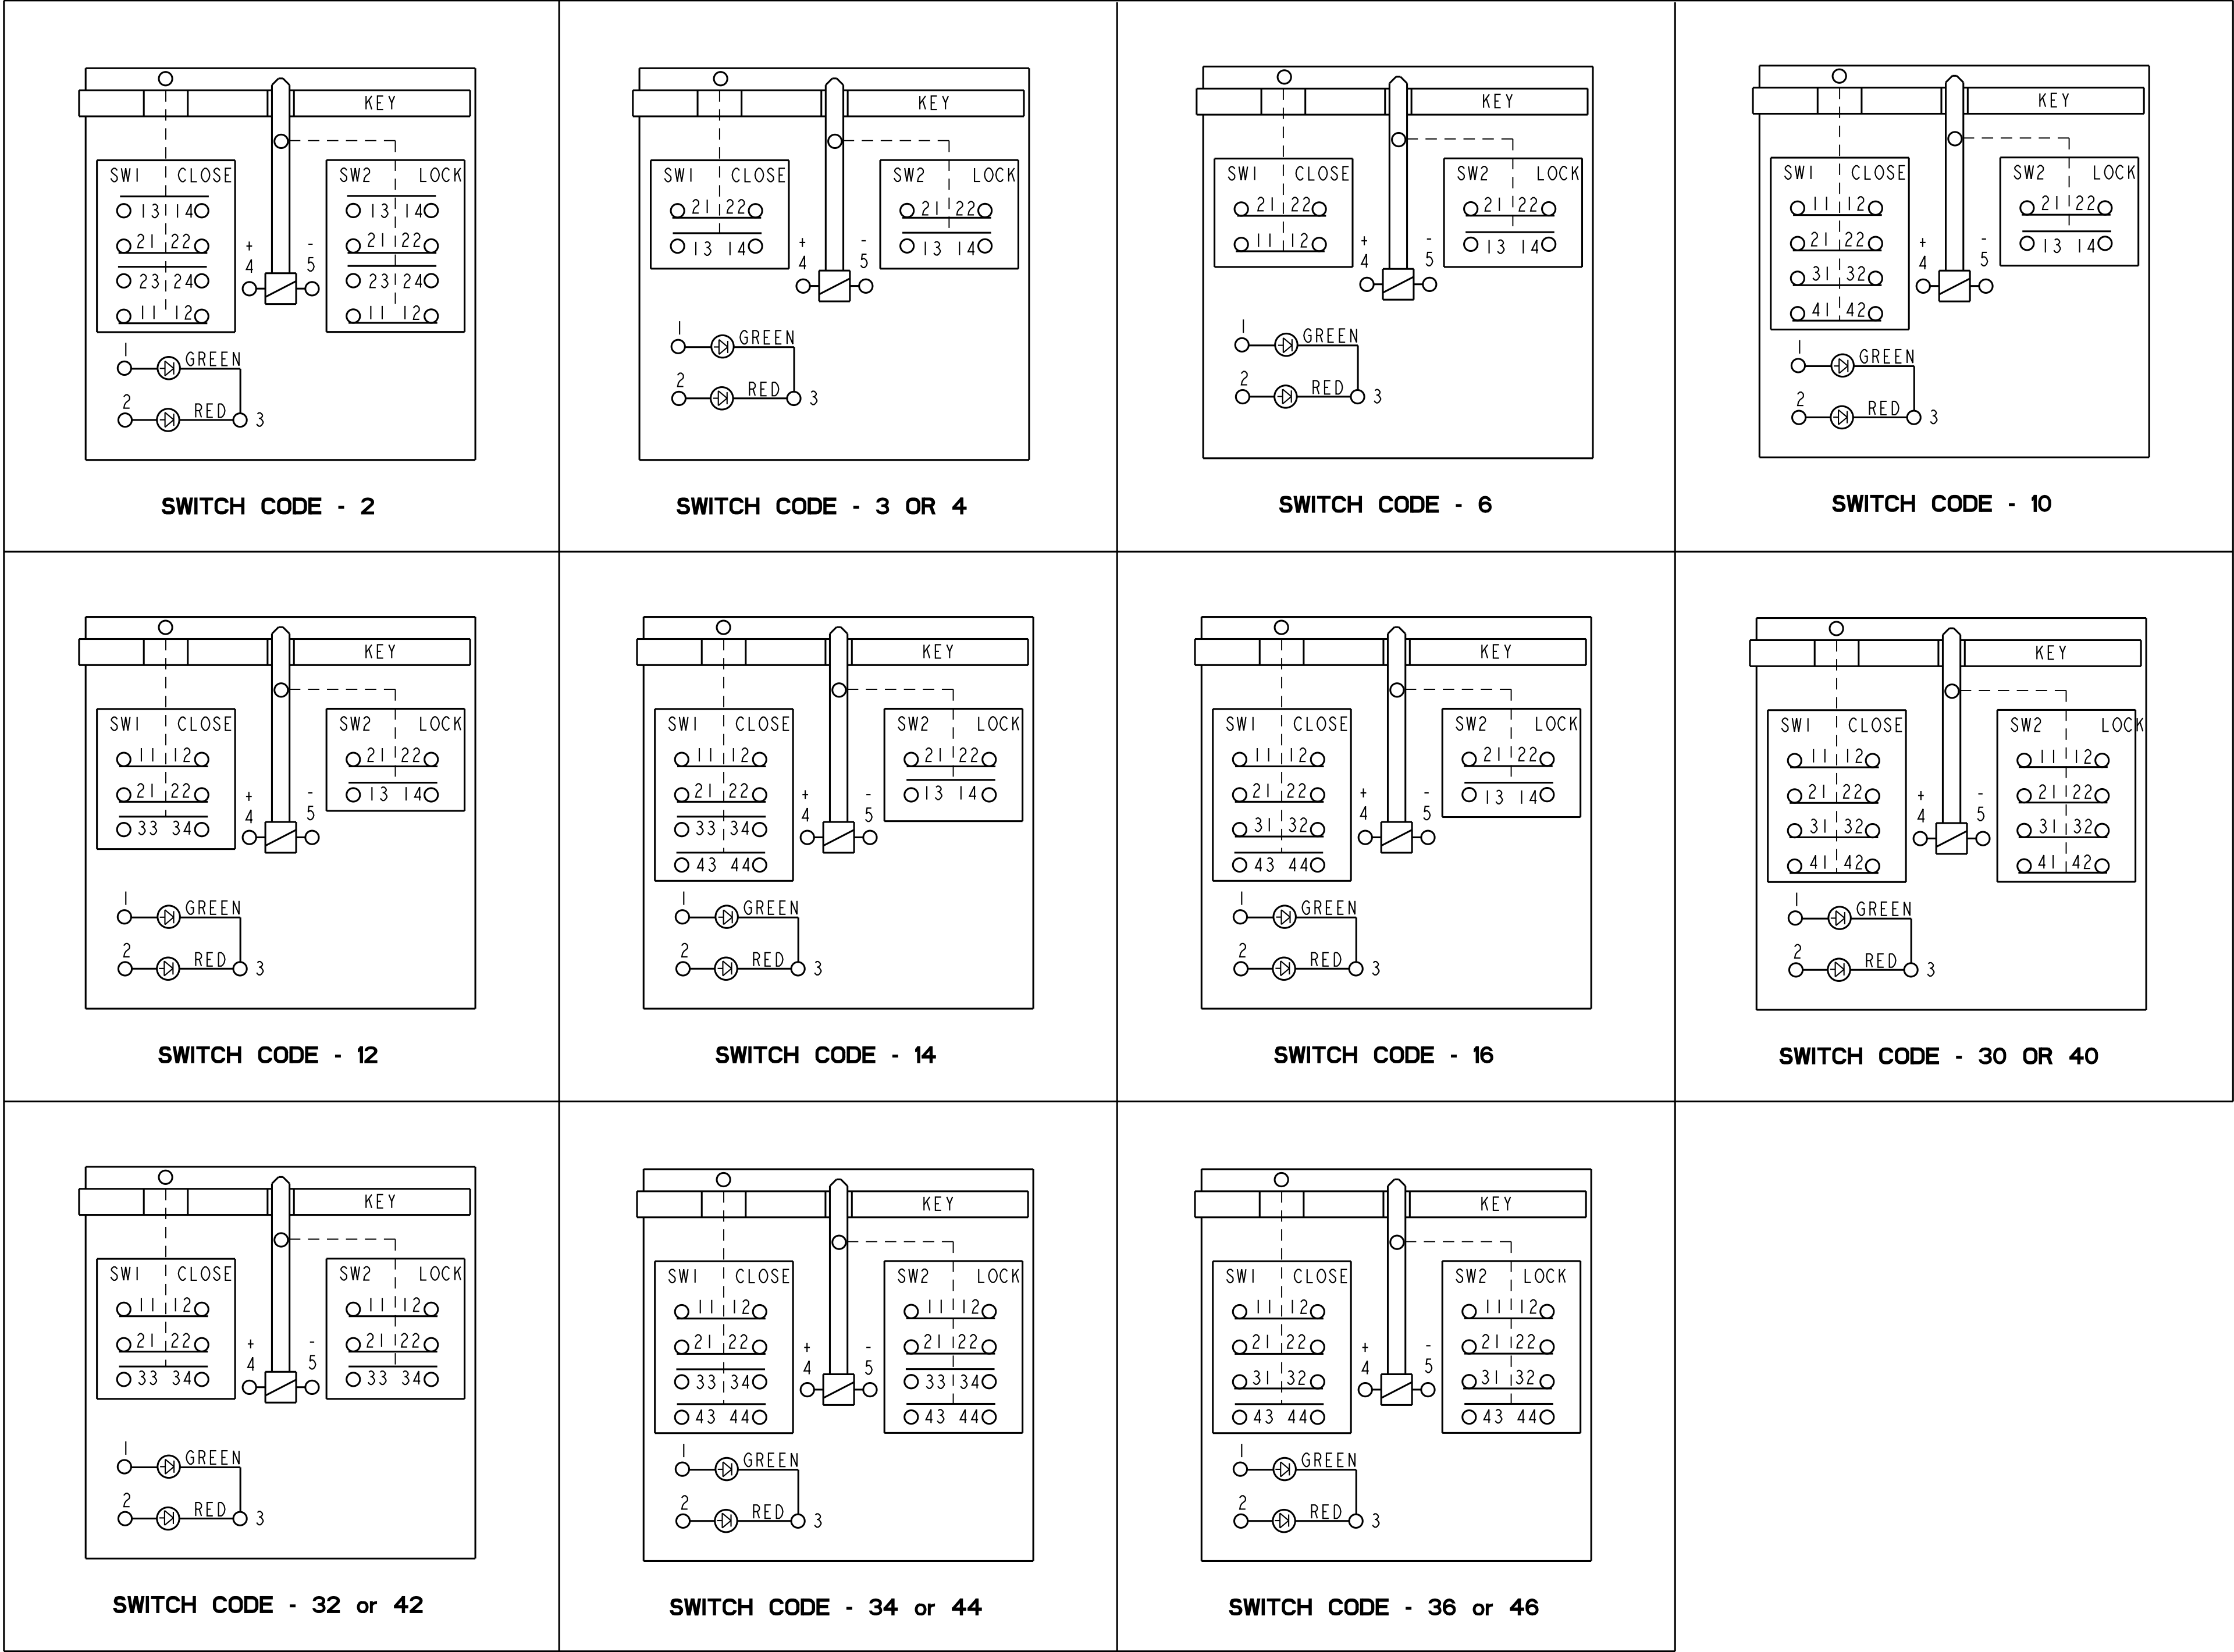

BODY / INDICATOR CODES - L OR R
TYPE / OVER-RIDE CODES - A OR B
DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED


PTC/CAD 3D
DRAWN
MAM LOC 98
CHECK
CMH 12MAY99
CHECK
PRS 04FEB09
CHECK
CMH 10NOV11
RELEASE NO. PR-23758
REPLACES
-
REVISIONS
N 0047583
S 04FEB09
P 0065737
R 0083578
31MAY10
0083578

M GK SERIES CHART 4
PAGE 10 OF 16


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK		GK SERIES CHART 4	
DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB			

THIRD ANGLE PROJECTION			
SCALE NTS			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES
MM	IN	MM	IN
±.04	±.001	±.01	±.0005
0.01/0.06	0.001/0.006	0.01/0.06	0.001/0.006




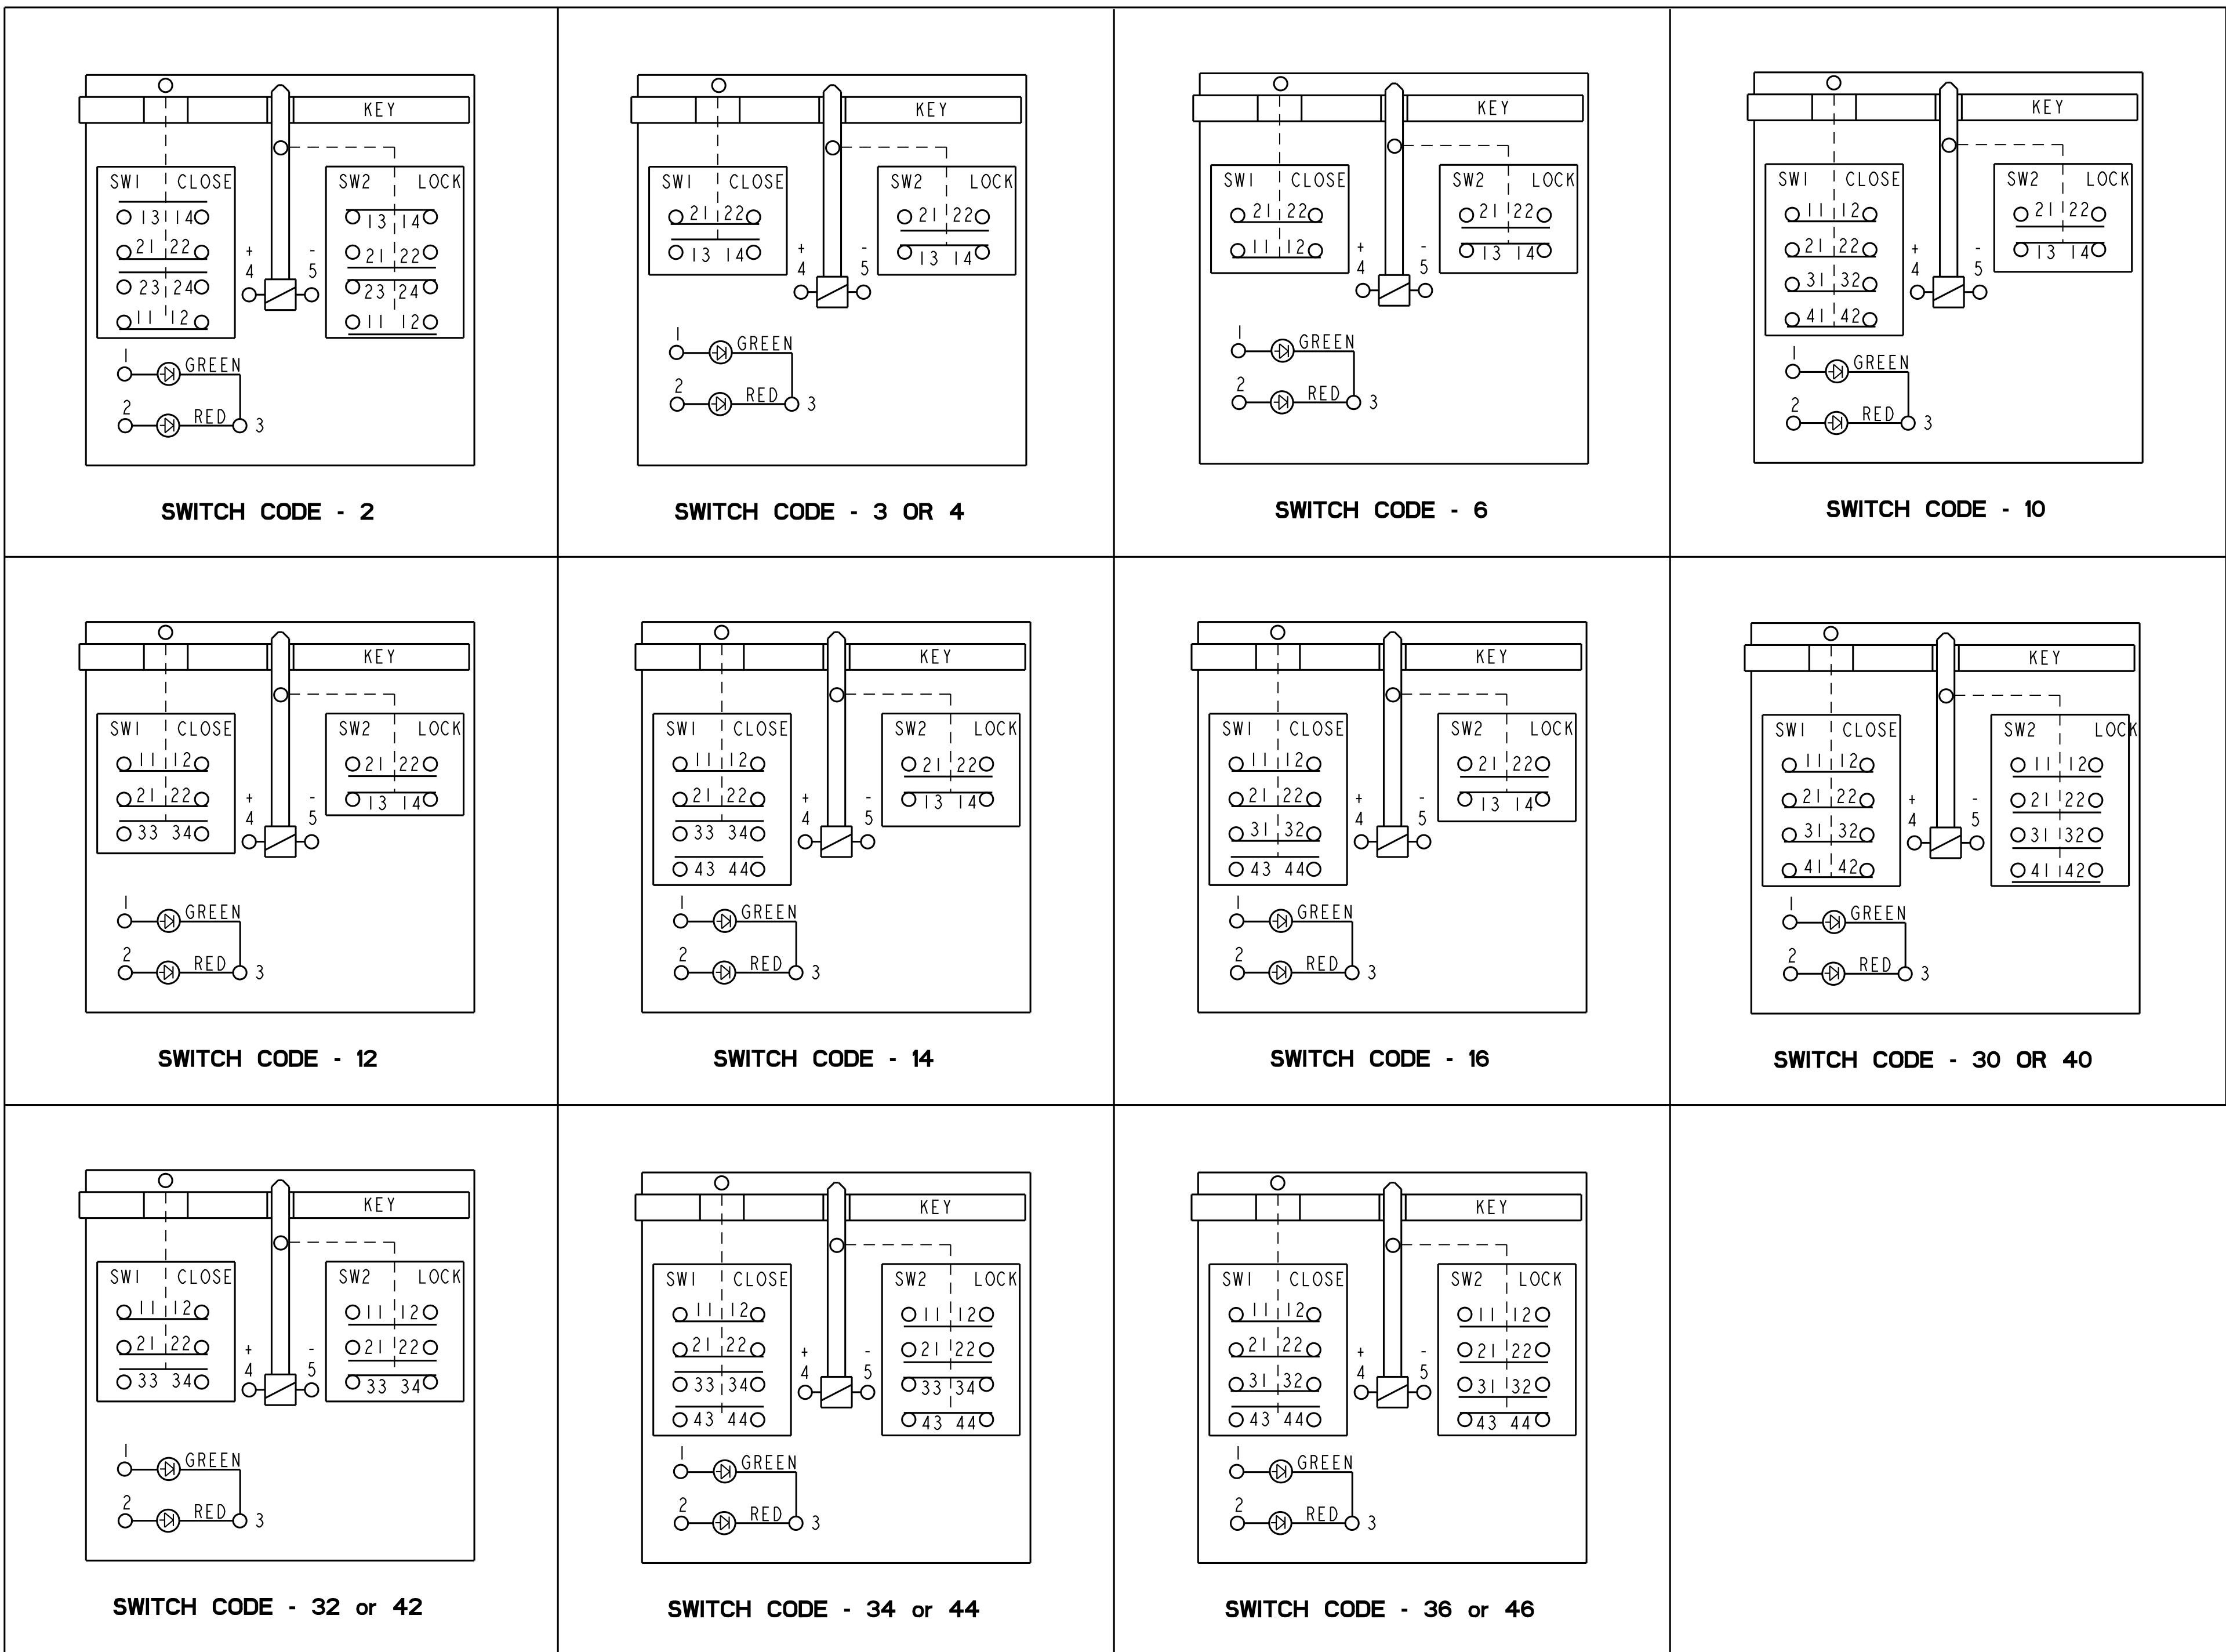


BODY / INDICATOR CODES - L OR R
 TYPE / OVER-RIDE CODES - S OR T
 DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED

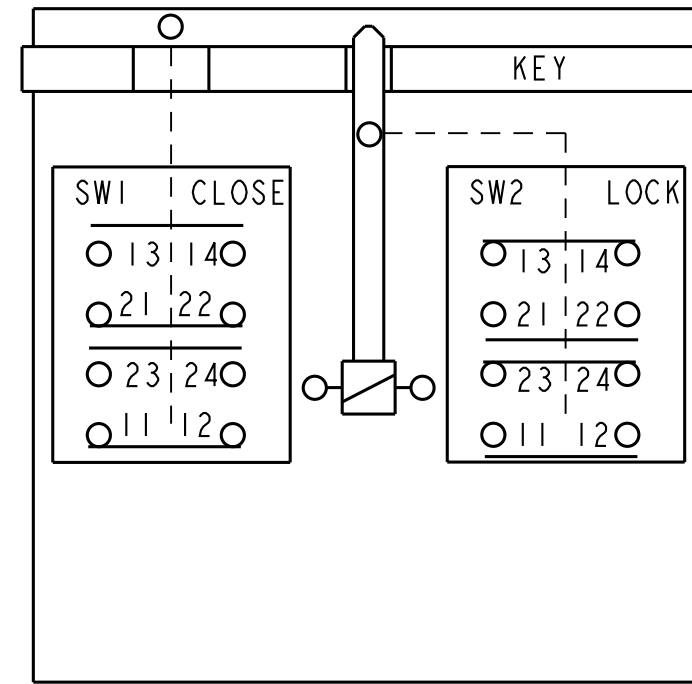


SWITCH CODE - 2

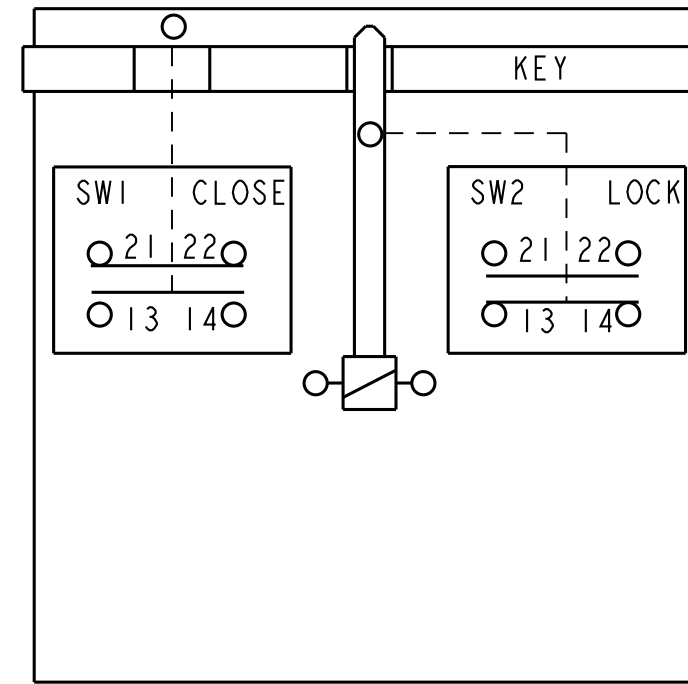


SWITCH CODE - 3 OR 4

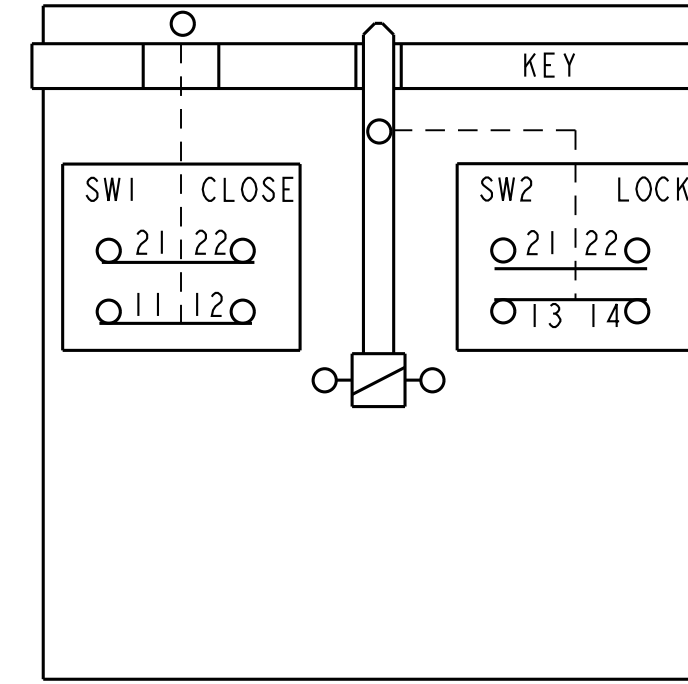


SWITCH CODE - 6

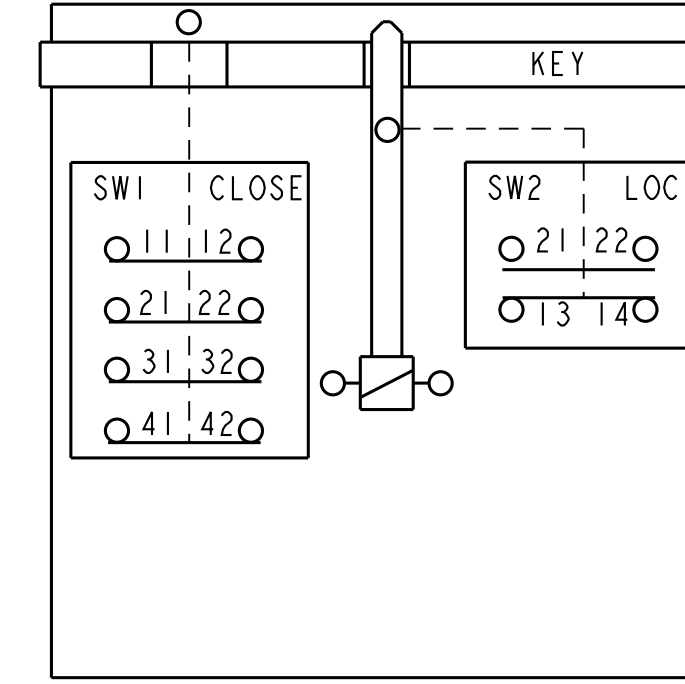


SWITCH CODE - 10

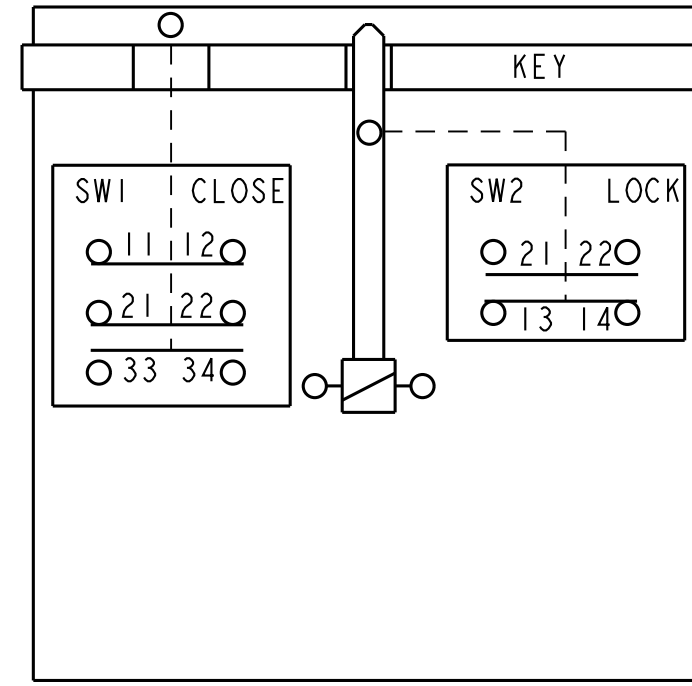


SWITCH CODE - 12

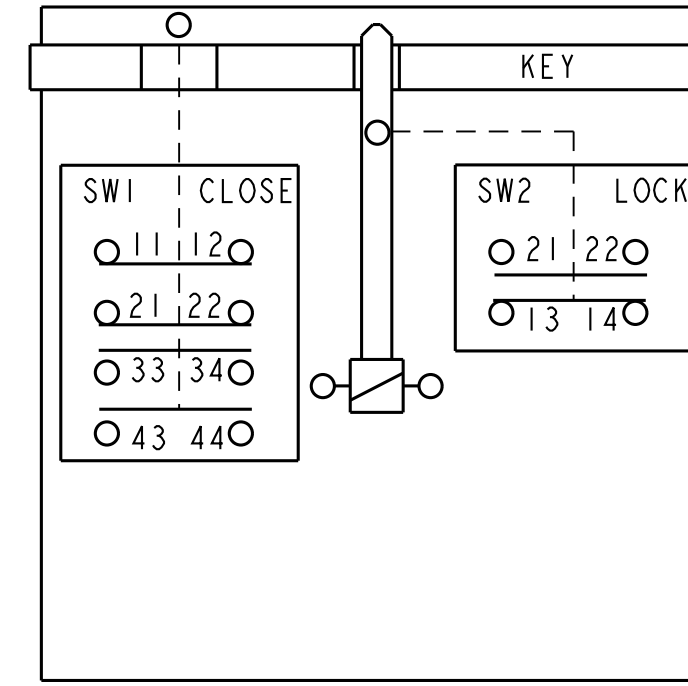


SWITCH CODE - 14

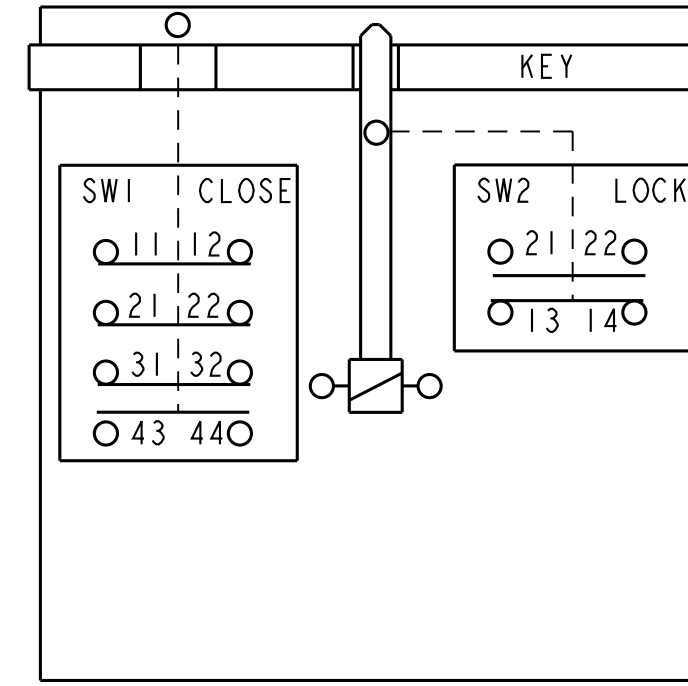


SWITCH CODE - 16

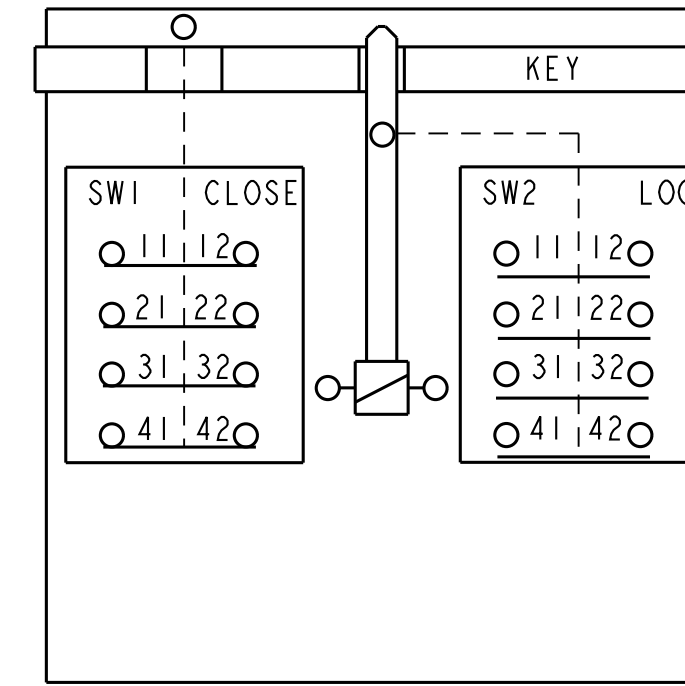


SWITCH CODE - 30 OR 40

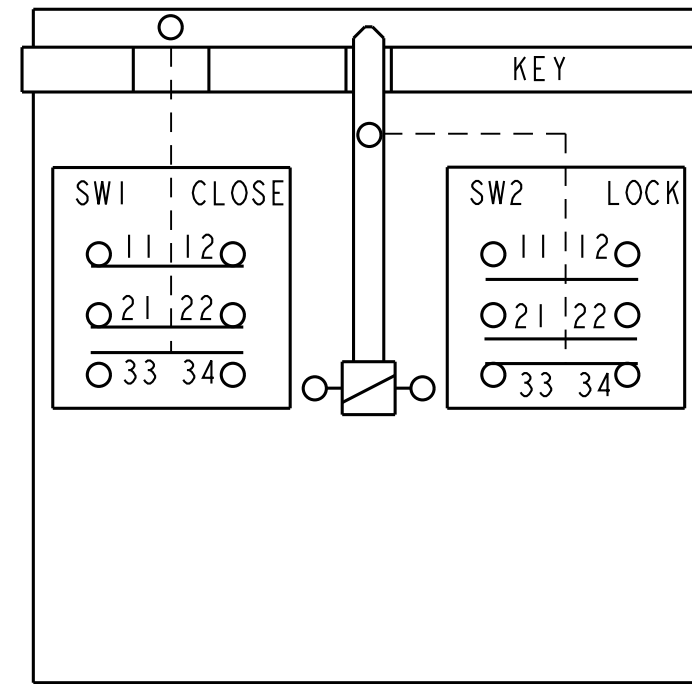

SWITCH CODE - 32 or 42

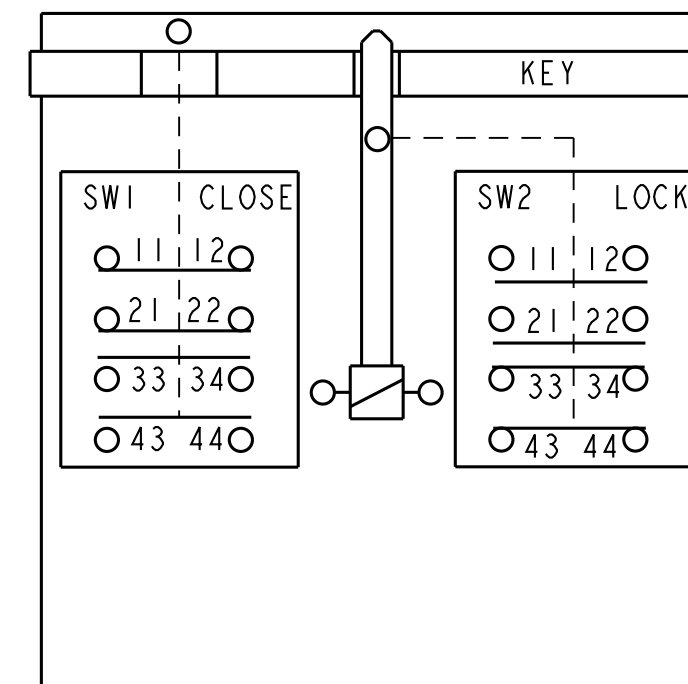

SWITCH CODE - 34 or 44

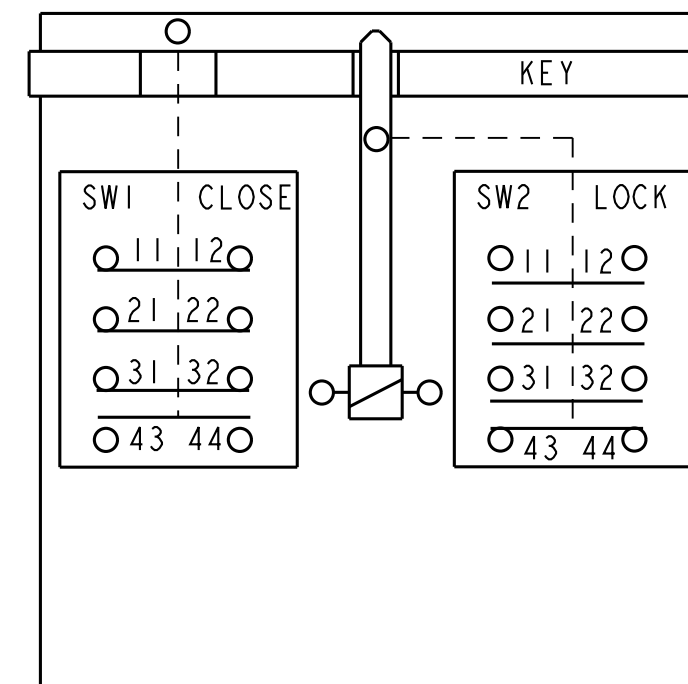


SWITCH CODE - 36 or 46


BODY / INDICATOR CODES - F OR G
TYPE / OVER-RIDE CODES - S OR T
DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED

[illegible]

AC SOLENOID VOLTAGE DEVICES

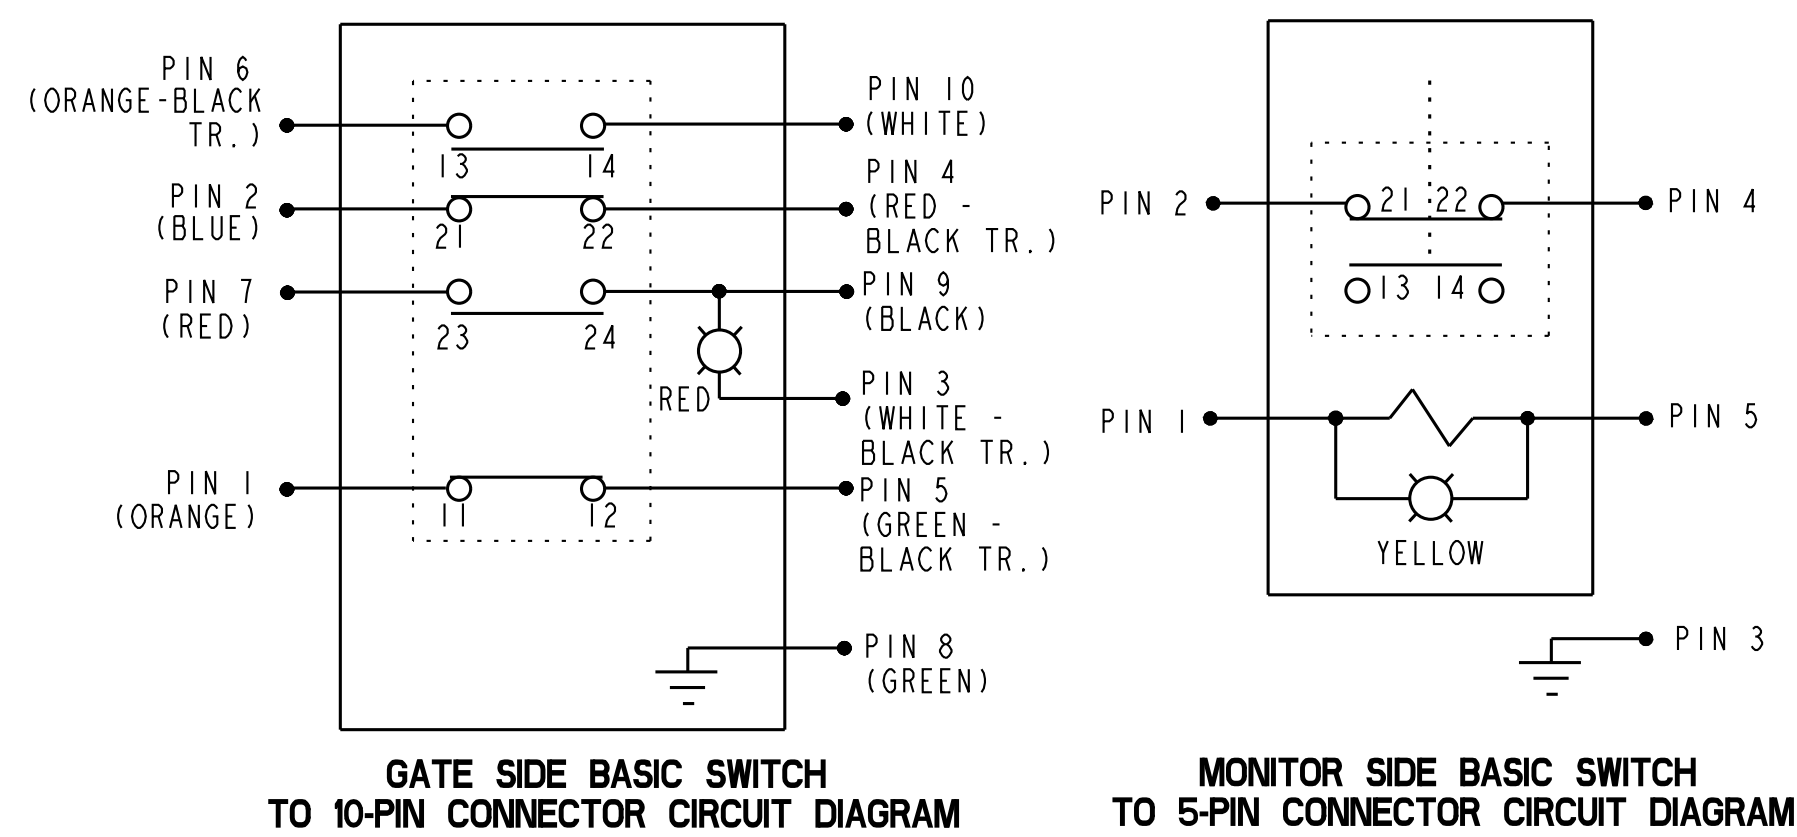

DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED

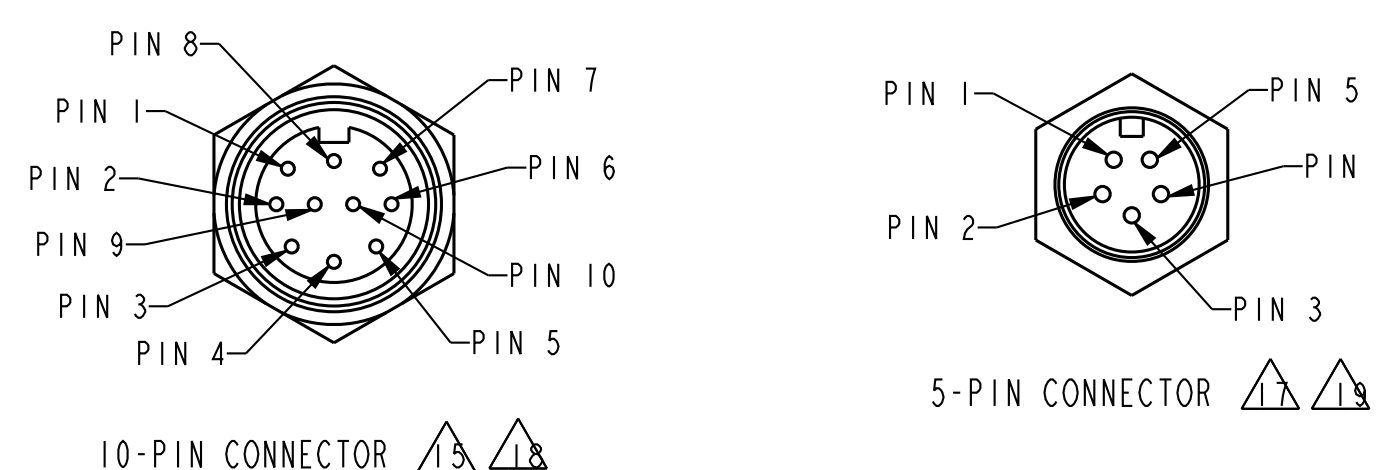

THIRD ANGLE PROJECTION

SCALE NTS

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :

	DIM. mm	TOL. mm/10	DIM. in/16	TOL. in/16
NO PLACES	$\overline{x}$	1 / .04	$\overline{x}, \overline{x}$	0.8 / .03
ONE PLACE	$\overline{x}, \overline{x}$	0.4 / .016	$\overline{x}, \overline{x}, \overline{x}$	0.368 / .01
TWO PLACES	$\overline{x}, \overline{x}, \overline{x}$	0.15 / .008	$\overline{x}, \overline{x}, \overline{x}, \overline{x}$	0.13 / .004
THREE PLACES				
ANGLES				

SI METRIC

DESIGN UNITS

US CUSTOMARY

WEIGHT 2.3 kg / 5 lb MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING

MICRO SWITCH
a Honeywell Division

SWITCH - DOOR INTERLOCK

GK SERIES CHART 4

ANSI Y14.5M-1982 APPLIES

FED MEG CODE 91939

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[GKFE16LXA2](#) [GKFE16LXA6](#) [GKLA2K1A2-F04](#) [GKLA2K1A2-F04-C](#) [GKLA2K2A2-F04-C](#) [GKLA3J1A2-F03-C](#)
[GKLA40F1C2-F05-C](#) [GKRA2K1A2-F03](#) [GKRA2K1A2-F04-C](#) [GKRA3K1A2-F03-C](#) [GKFE3P7T4](#) [GKGE3LXB4](#)
[GKLE44P7S4](#) [GKLG44LXS2](#) [GKLG46L7S2](#) [GKLA14L9A2-FW](#) [GKRG46MXA2-F21](#) [GKLE44L6S4](#) [GKLG6L6A2](#)
[GKRA14L6A2-FW](#) [GKLE46L9A4](#) [GKLG16L6A2](#) [GKLE46L7A2](#) [GKLE44L7T4](#) [GKLE36PXA2-F22](#) [GKRA15M6A4-FW](#)
[GKLE44L6A2](#) [GKLE44PXT2](#) [GKFG14LXA2](#) [GKLE44L9A4](#) [GKLG16L7A2](#) [GKLE46L9A2](#) [GKLE44LXS4](#)
[GKLE44P7T4](#) [GKRA14P9A2-FW](#) [GKLG16L6S2](#) [GKLE46L7S4](#) [GKLA15L6A2-FW](#) [GKLA15M6A2-FW](#) [GKLG16L7S2](#)
[GKRA15P9A2-FW](#) [GKLE44LXA2](#) [GKLG46L7A2](#) [GKLA15M9A2-FW](#) [GKLF46PXB2](#) [GKRG16L6A2](#) [GKLE44P6A4](#)
[GKLA14L6A2-FW](#) [GKLG46PXA2-F20](#) [GKLA15L9A2-FW](#) [GKLA15P6A2-FW](#) [GKLA46L6A4](#) [GKLE46P7A4](#)
[GKLG44PXA2](#) [GKLA14M9A2-FW](#) [GKRA15M6A2-FW](#) [GKLA2PXA2-F04](#) [GKRA15L6A2-FW](#) [GKLE44L7A2](#)
[GKLE44LXS2](#) [GKLE46LXA2](#) [GKLA15P6A4-FW](#) [GKLG46P6A2](#) [GKLF44LXS2](#) [GKLD44L6A2](#) [GKLE44L9A2](#)