


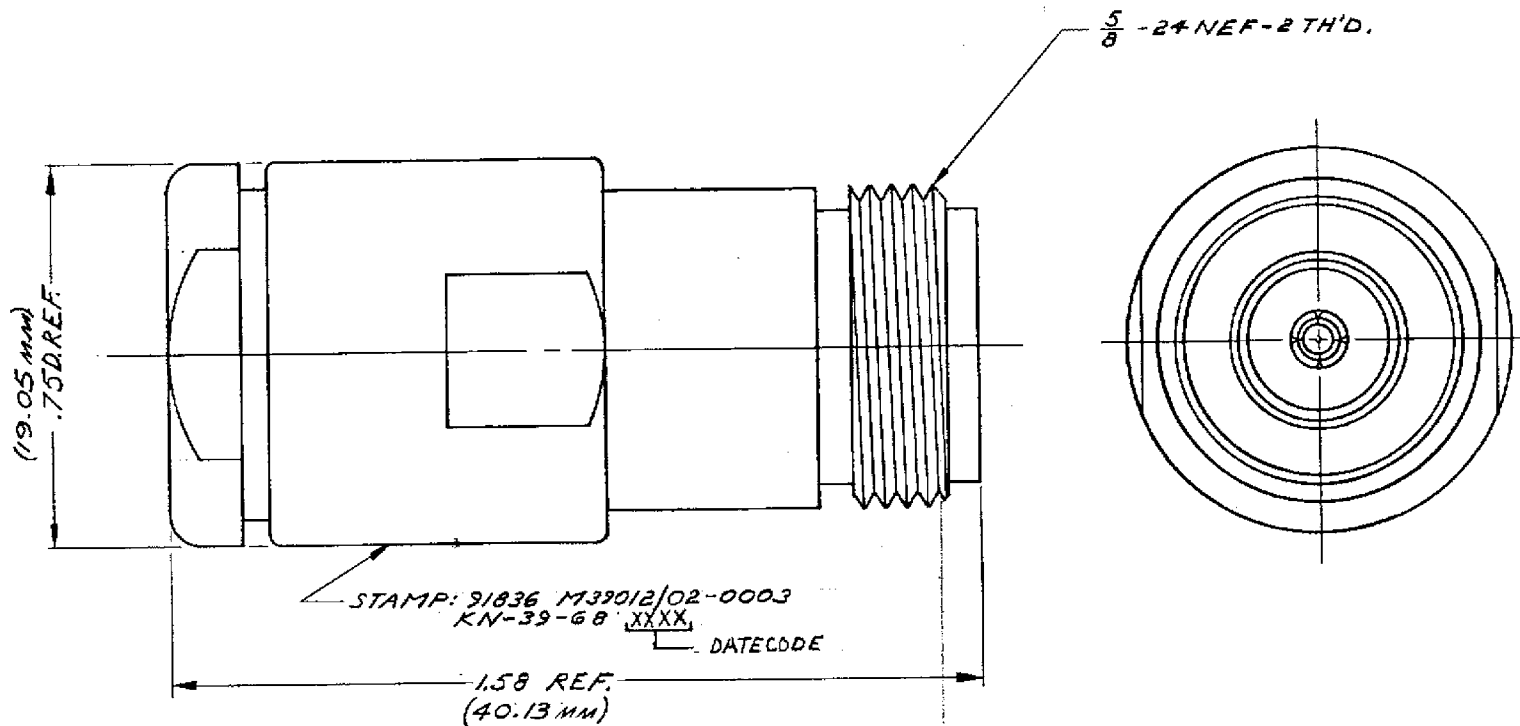

NOTES:

1. FOR USE WITH RG-8,9,213 & 214 CABLE GROUPS.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^\circ 30'$
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

REVISIONS

ISSUE	CHANGES
5	CN 23169 E JEP 13 APR 82
6	CN 32243 A LNM 1 JUN 90

S-D

S-D

KN-39-68

REP: SUPERSEDES
UG-1186A/U

FINISH

SPEC.

MATL

SPEC.

N JACK

DRAWN HLA DATE 8 APR 70
APPR. DAM DATE 28 AUG 70

KINGS ELECTRONICS
40 HARBORDALE ROAD
TUCKAHOE, N. Y. 10707

M39012/02-0003

ITEM	REQ'D	DESCRIPTION	DRAWING NO.
------	-------	-------------	-------------