





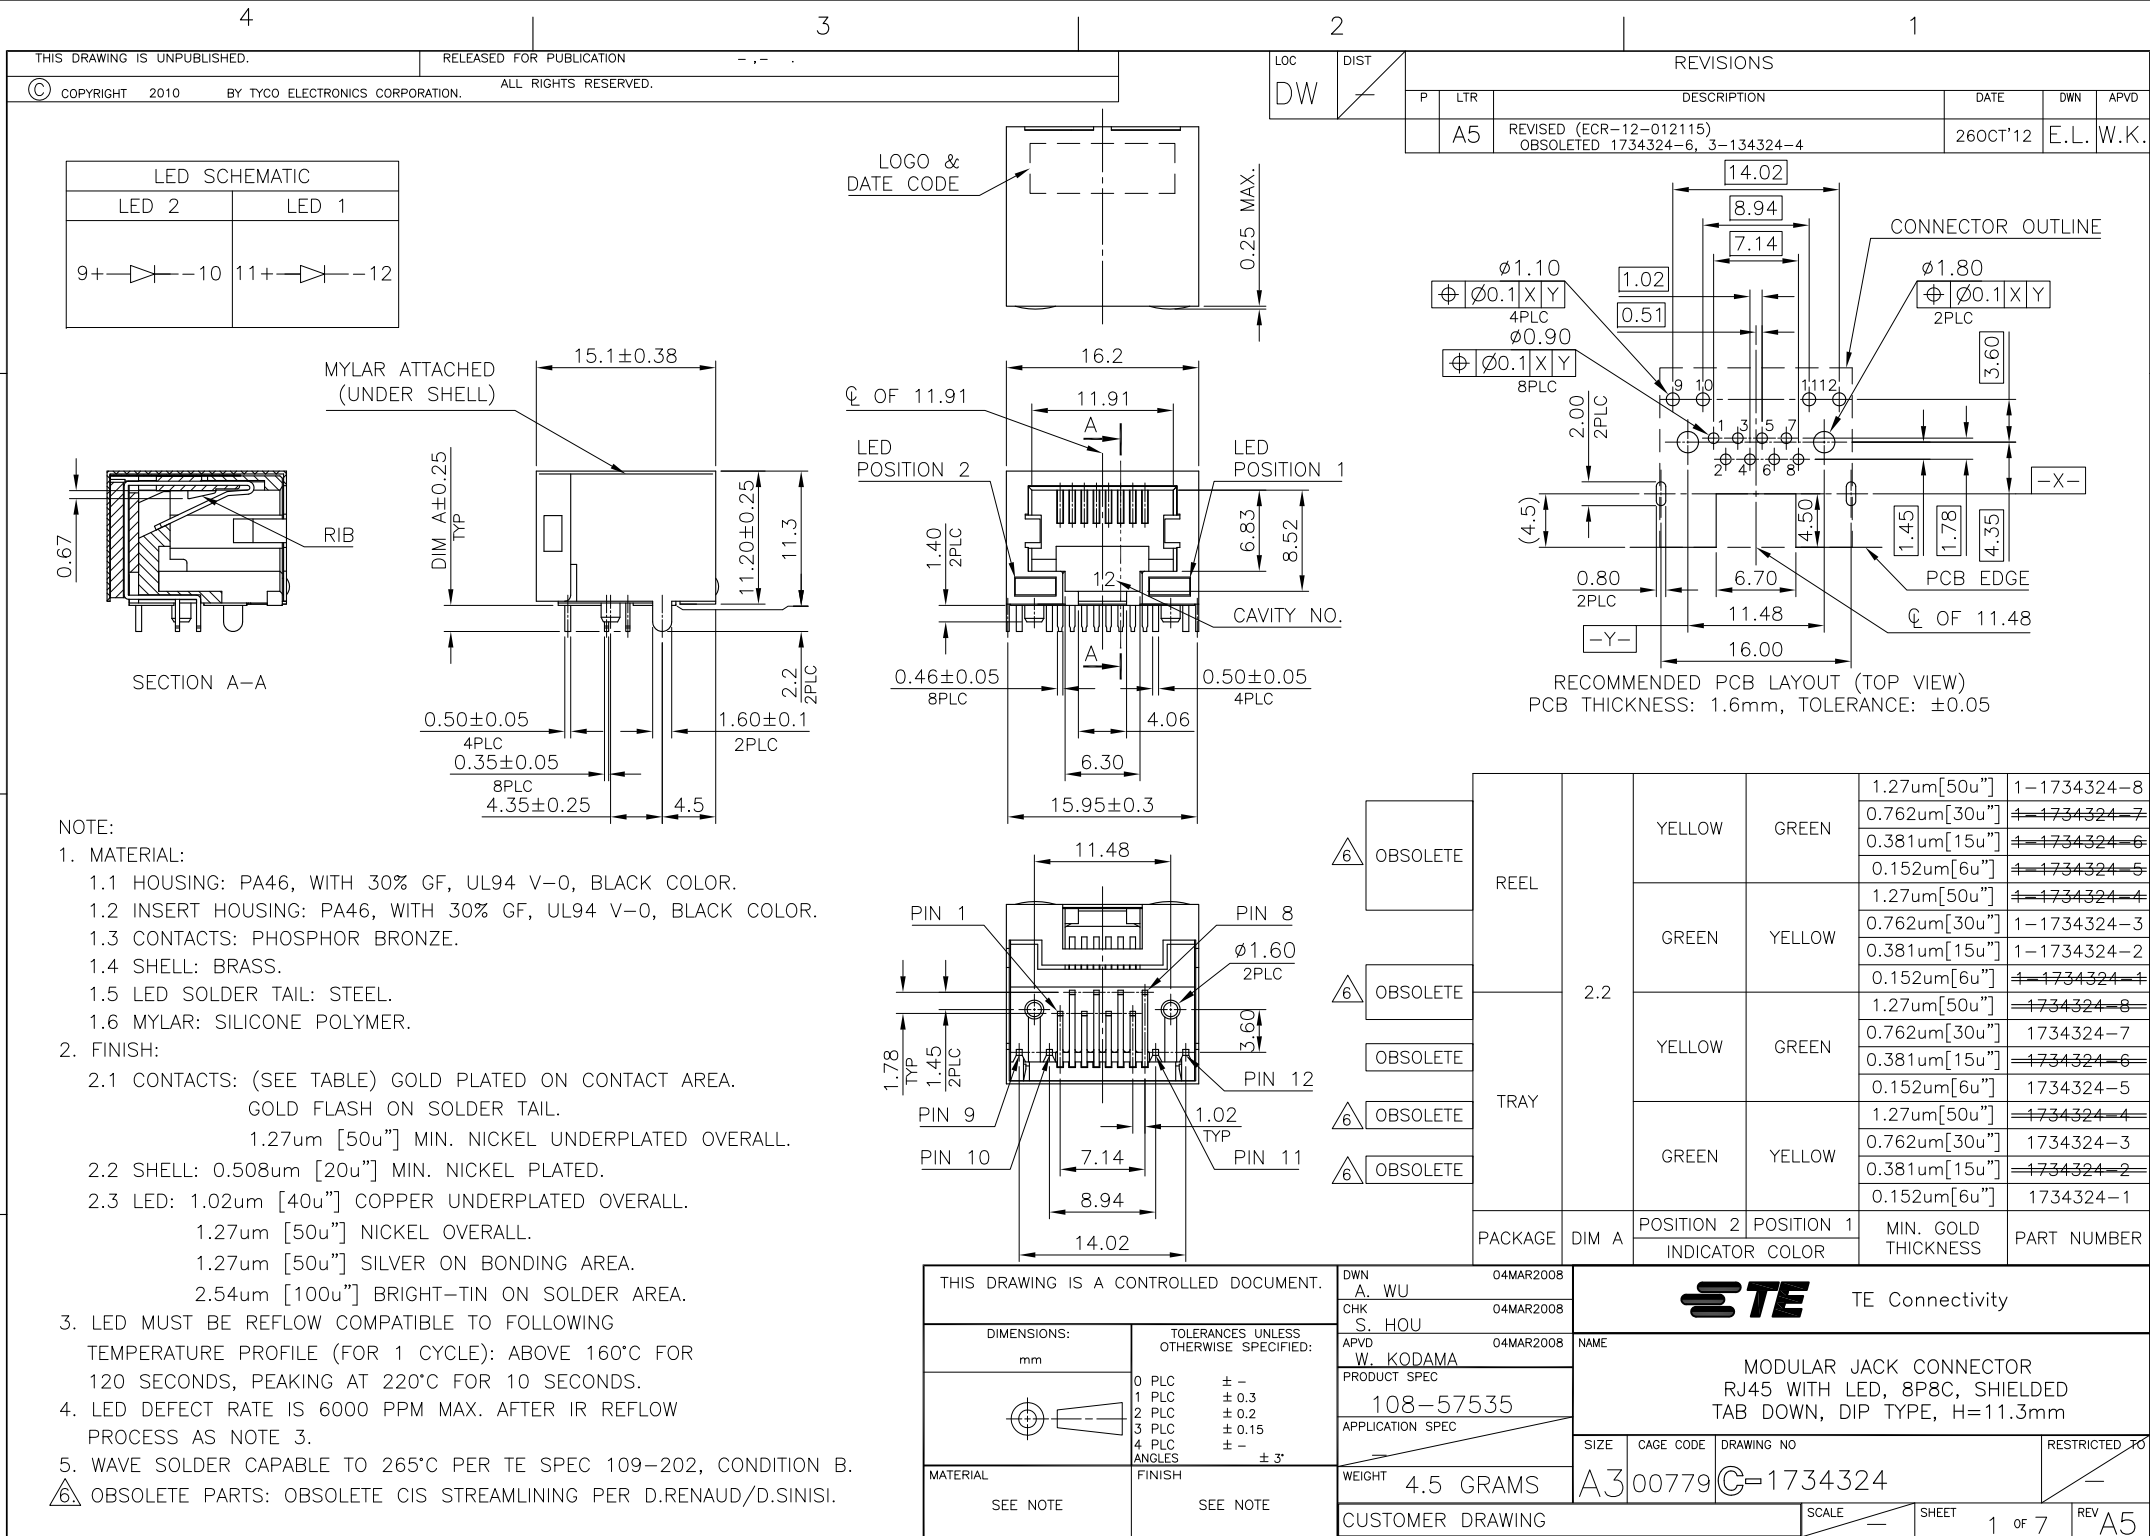

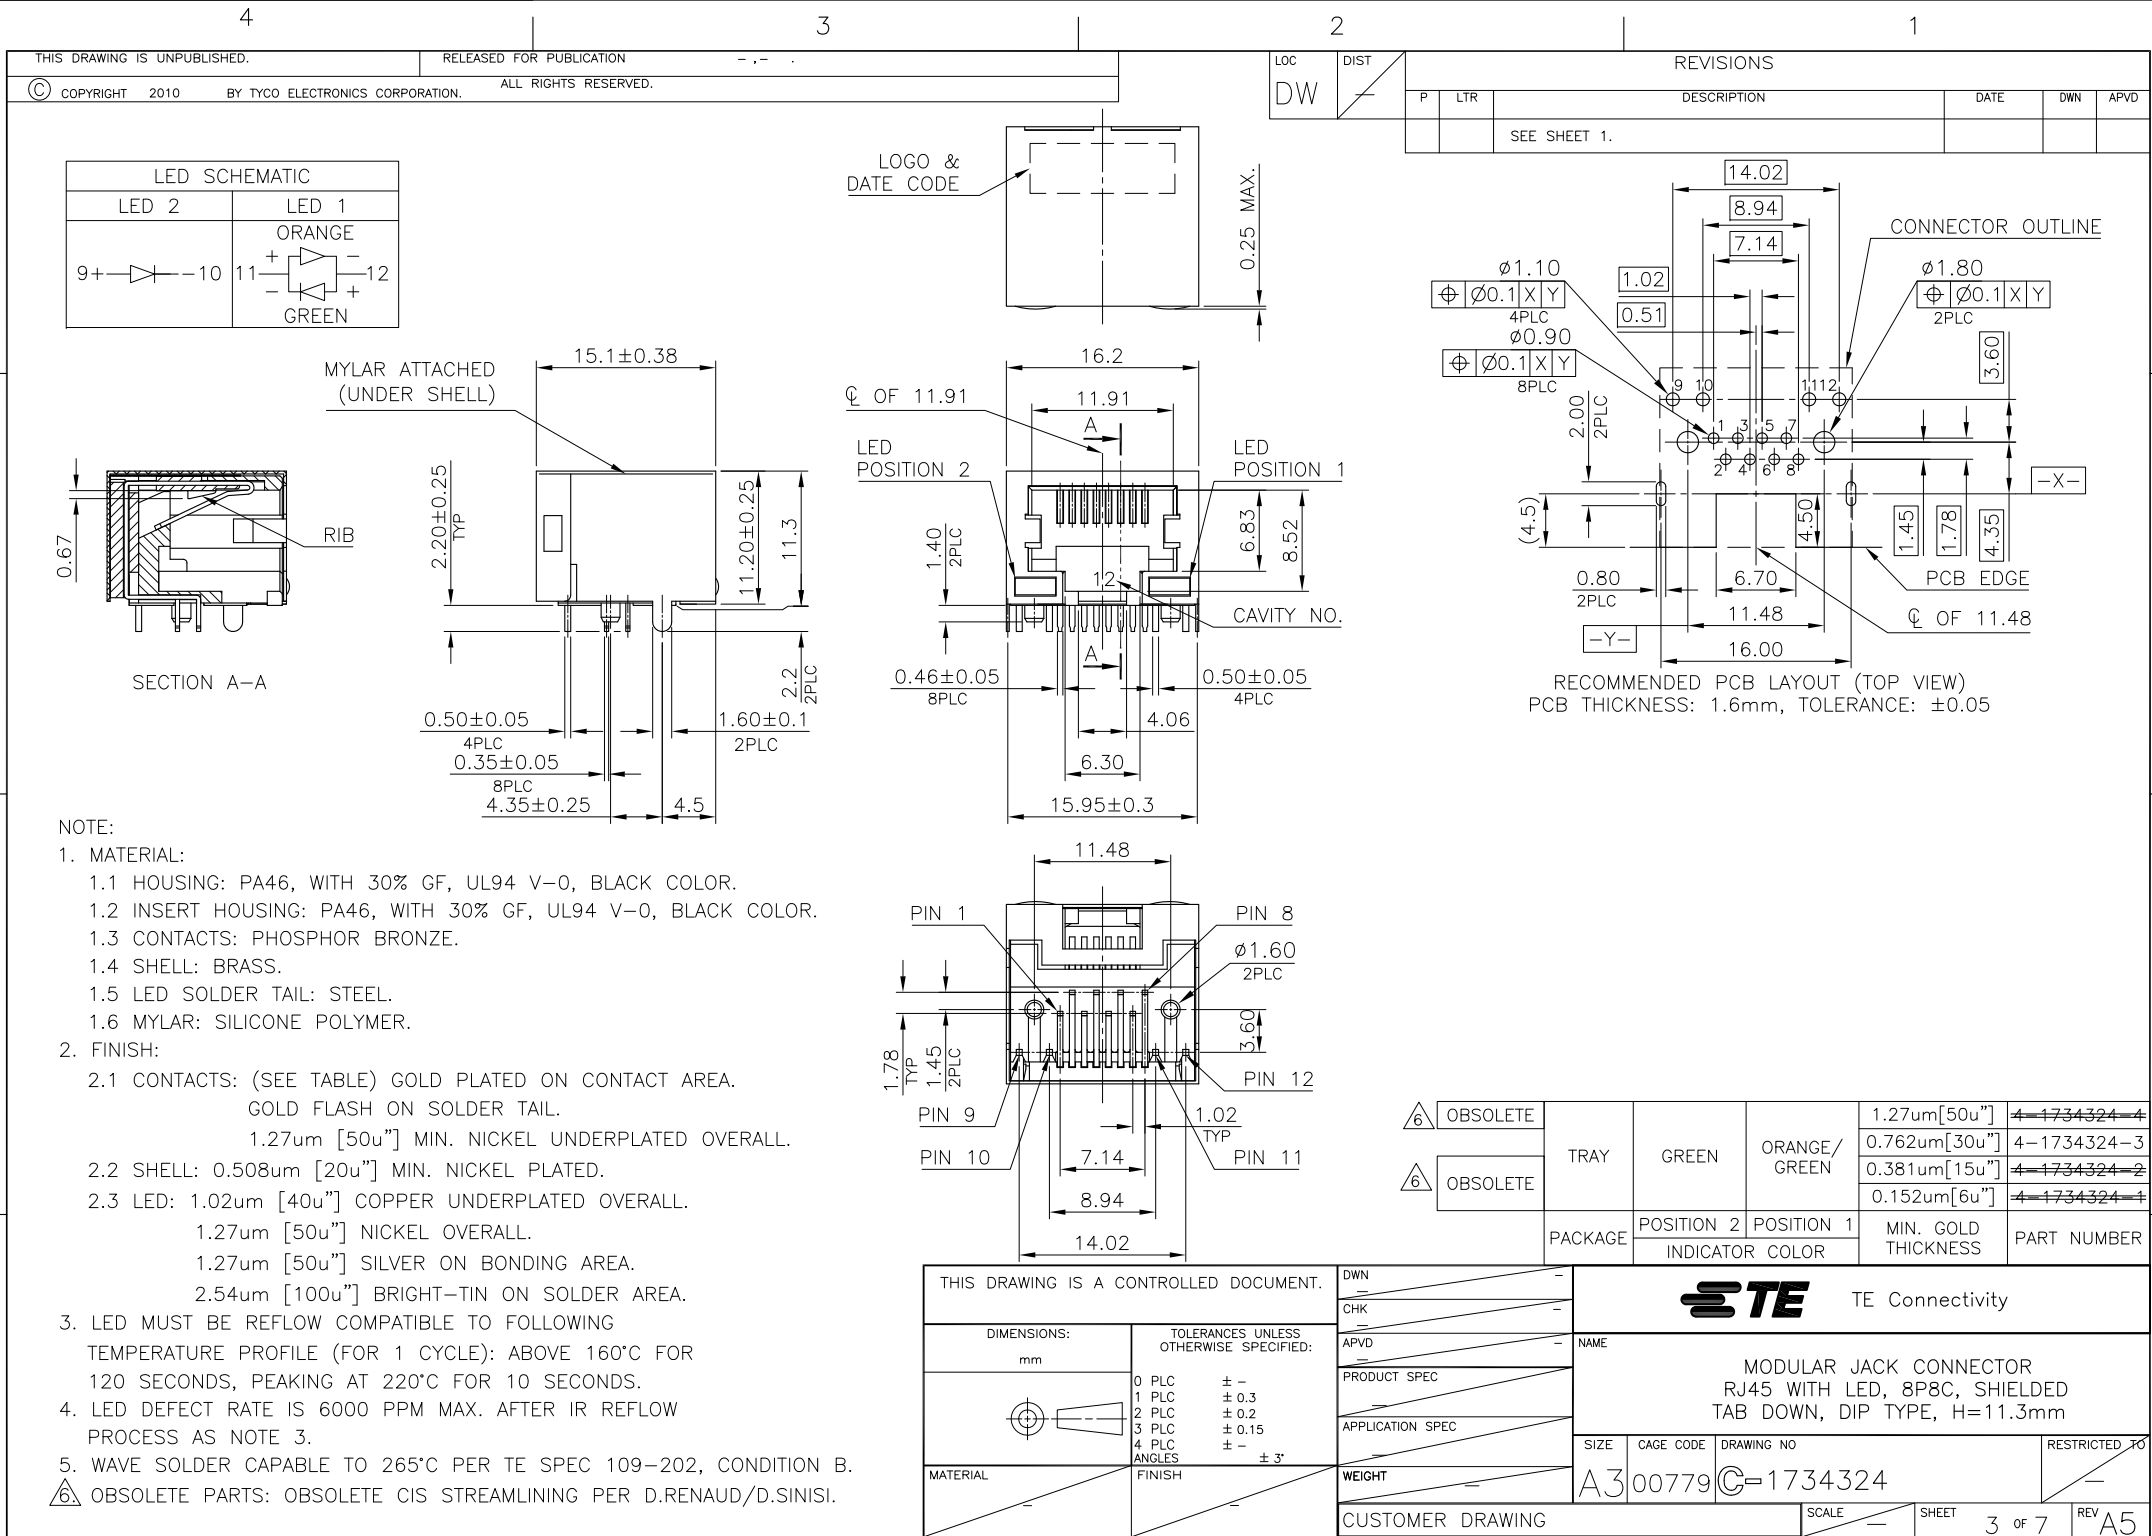

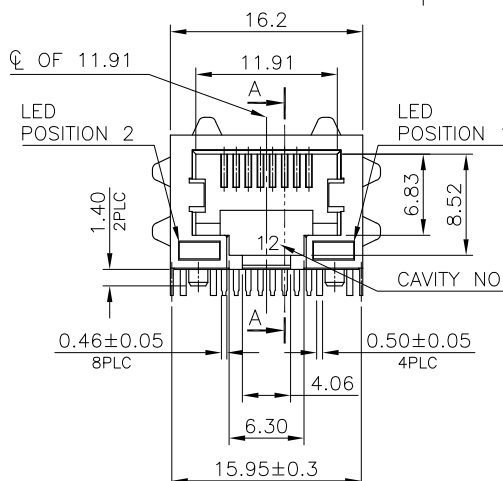

6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

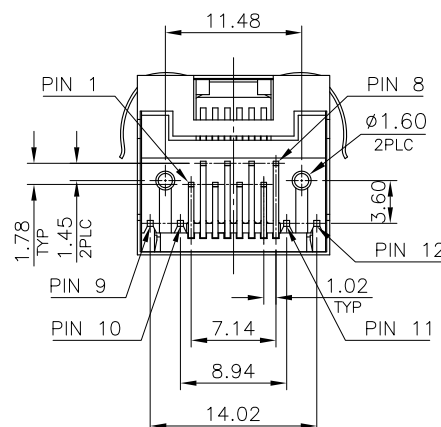

6 OBSOLETE

E	TRAY	3.5	GREEN	YELLOW	0.762um[30u"]	5-1734324-9
		2.2	YELLOW	GREEN	1.27um[50u"]	5-1734324-8
					0.762um[30u"]	5-1734324-7
					0.381um[15u"]	5-1734324-6
					0.152um[6u"]	5-1734324-5
			GREEN	YELLOW	1.27um[50u"]	5-1734324-4
					0.762um[30u"]	5-1734324-3
		0.381um[15u"]			5-1734324-2	
				0.152um[6u"]	5-1734324-1	
PACKAGE	DIM A	POSITION 2	POSITION 1	MIN. GOLD THICKNESS	PART NUMBER	
		INDICATOR COLOR				

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS: mm	
	
MATERIAL	

TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0	PLC ± -
1	PLC ± 0.3
2	PLC ± 0.2
3	PLC ± 0.15
4	PLC ± -
ANGLES ± 3°	
FINISH	

TE Connectivity

MODULAR JACK CONNECTOR
RJ45 WITH LED, 8P8C, SHIELDED
TAB DOWN, DIP TYPE. H=11.3mm

SIZE	CAGE CODE	DRAWING NO
------	-----------	------------


A 300779 C-1734324

RESTRICTED TO

CUSTOMER DRAWING

SCALE

SHEET	4 OF 7	REV	A5
-------	--------	-----	----

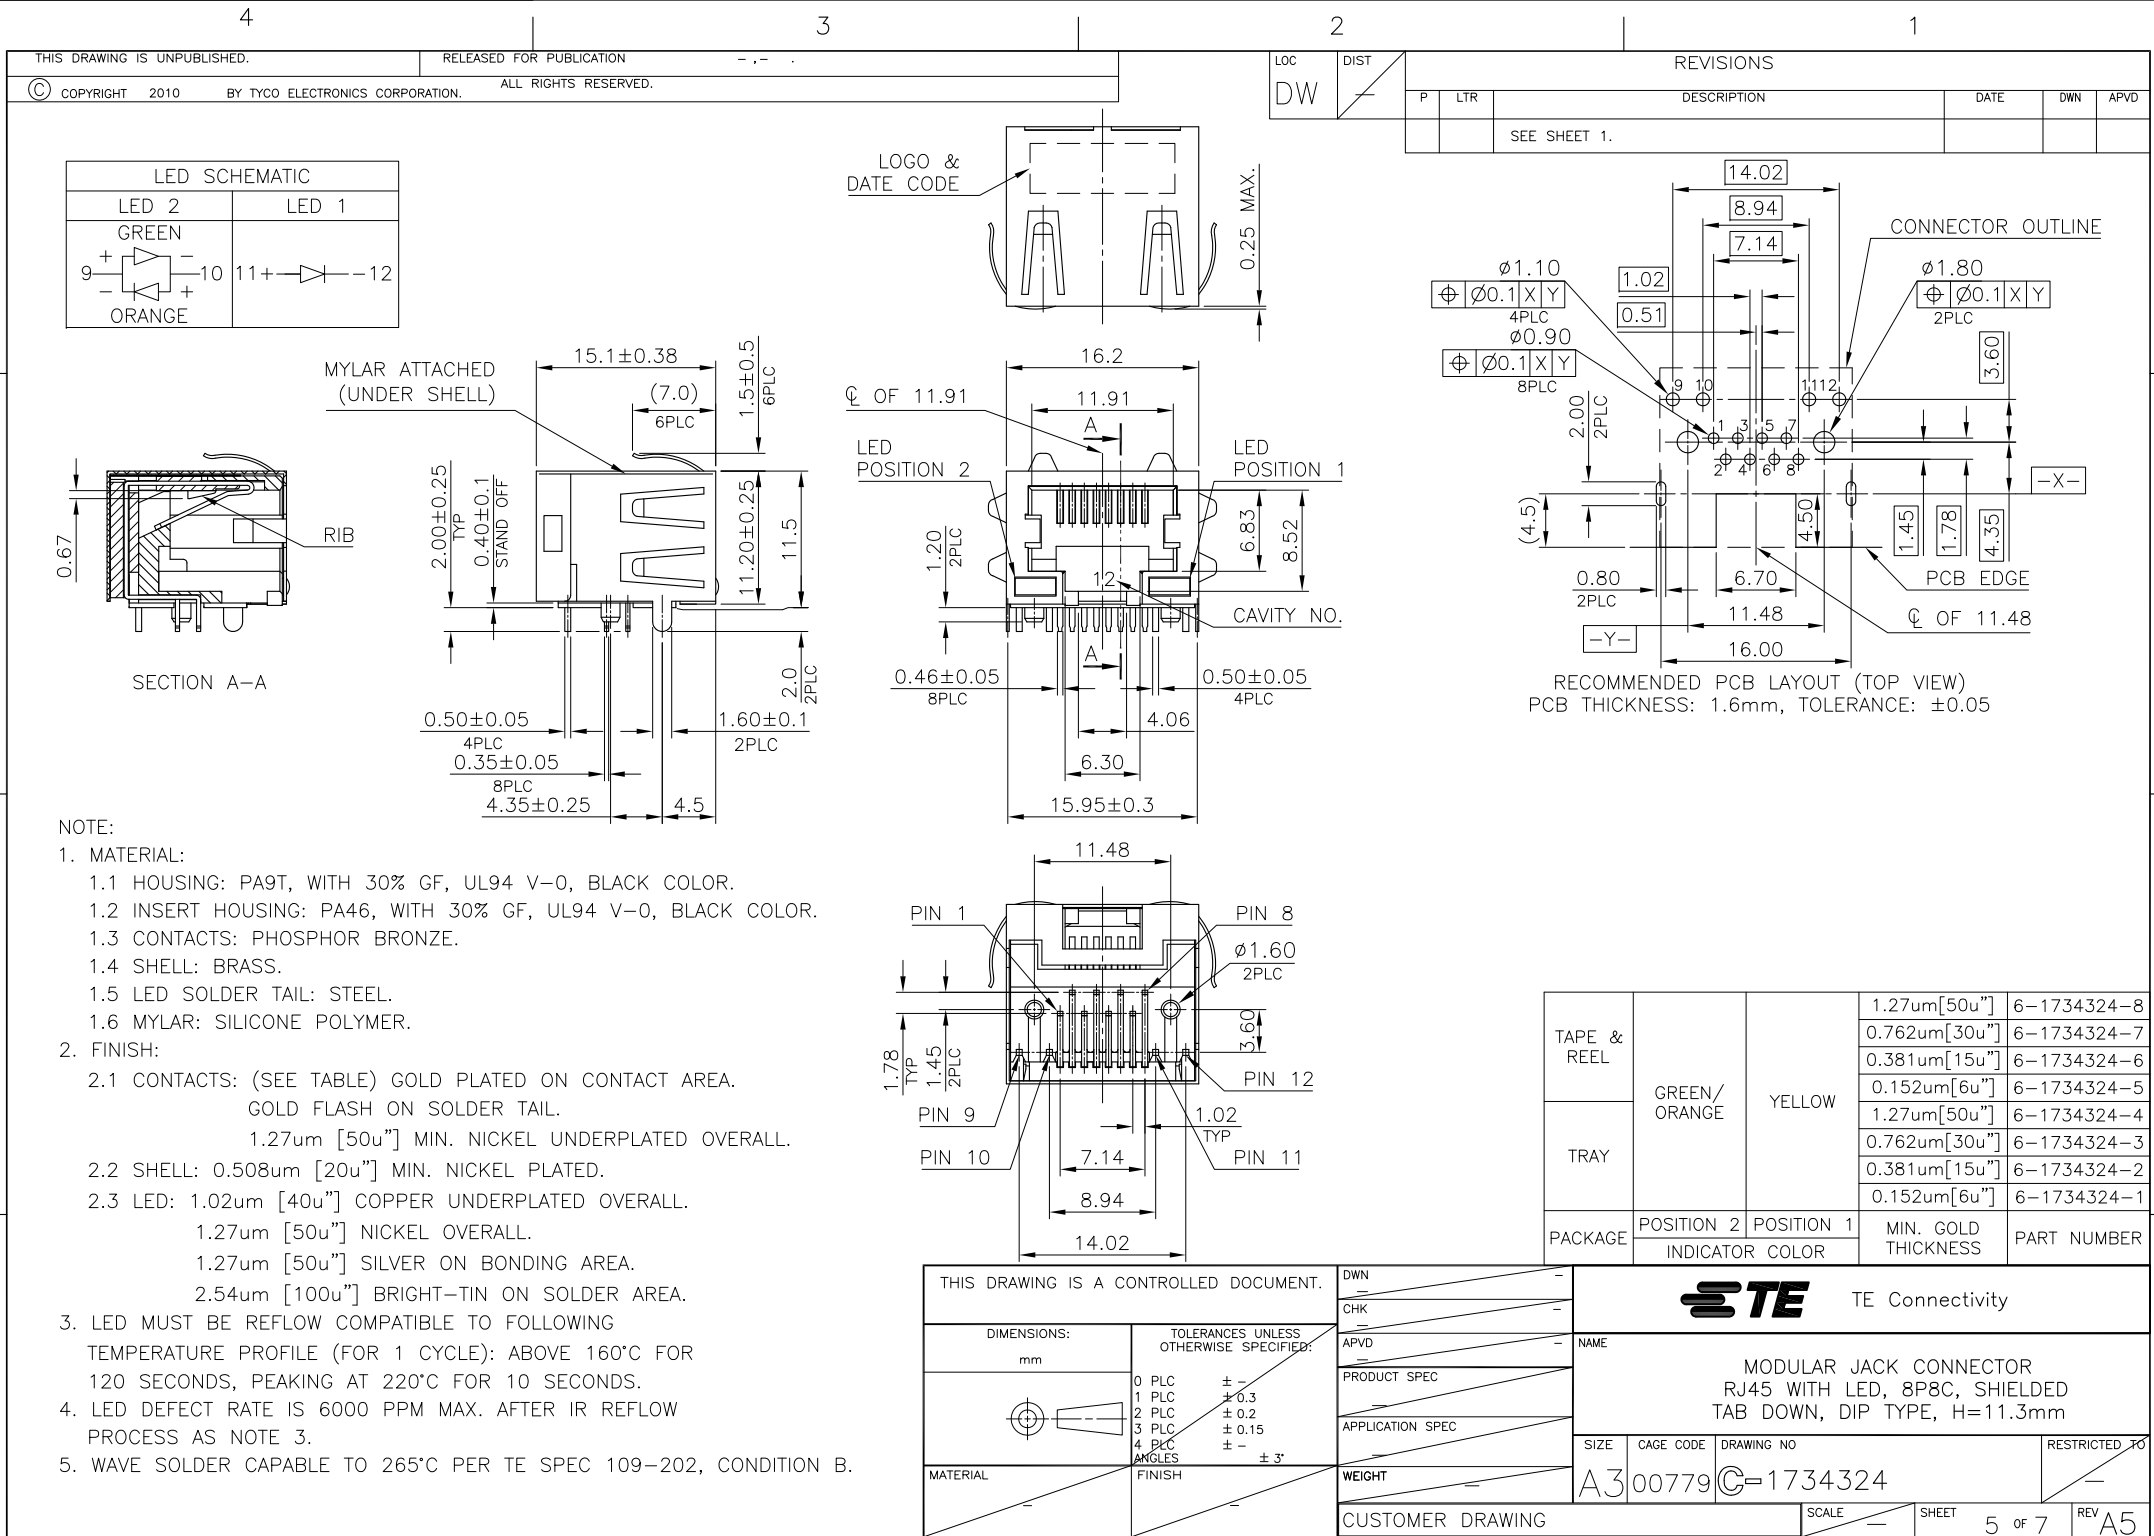

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

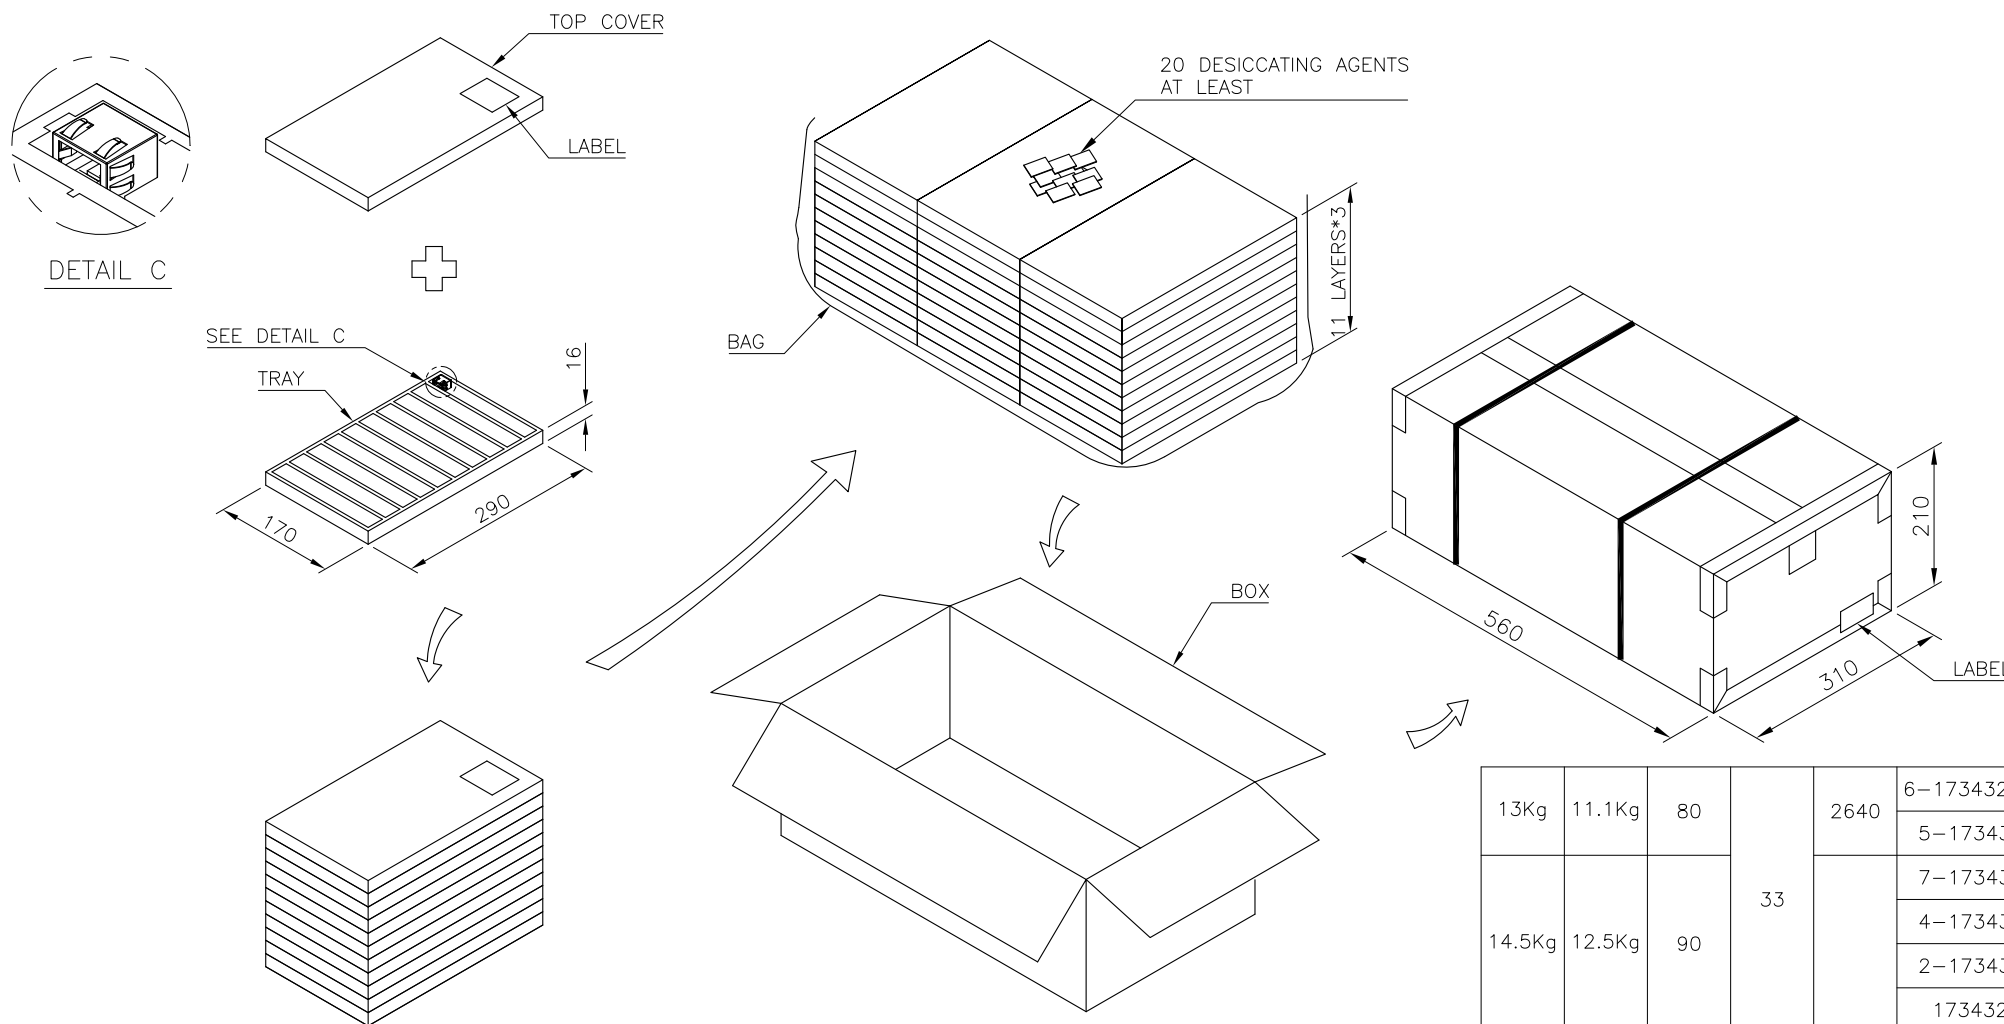

NOTES:

1. MATERIAL:
TRAY: PVC.
BOX: CORRUGATED FIBER.
2. DIMENSION: SEE DRAWING
3. QUANTITY: SEE TABLE
4. WEIGHT: SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ±0.3 2 PLC ±0.2 3 PLC ±0.15 4 PLC ± ANGLES ±3°
MATERIAL	FINISH

DWN	—
CHK	—
APVD	—
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—
CUSTOMER DRAWING	—

STE

TE Connectivity

NAME					RESTRICTED —
MODULAR JACK CONNECTOR RJ45 WITH LED, 8P8C, SHIELDED TAB DOWN, DIP TYPE, H=11.3mm					
SIZE	CAGE CODE	DRAWING NO			—
A3	00779	C=1734324			
SCALE			SHEET		6 of 7
—			—		
					REV A5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

©

COPYRIGHT 2010

BY TYCO ELECTRONICS CORPORATION.

LOC
DW

DIST

REVISIONS

P

LTR






DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.

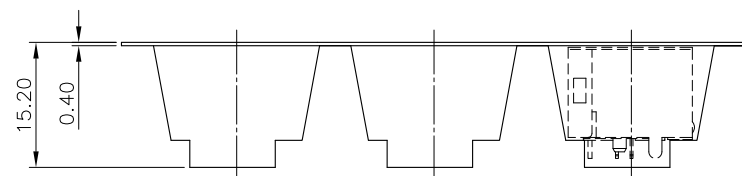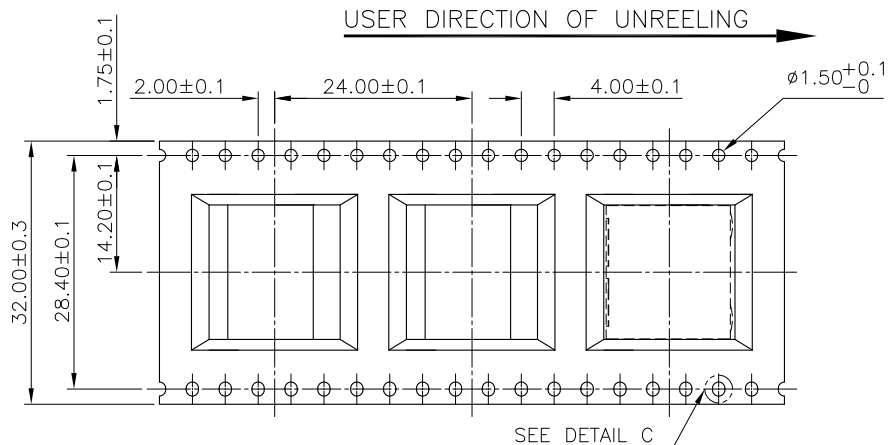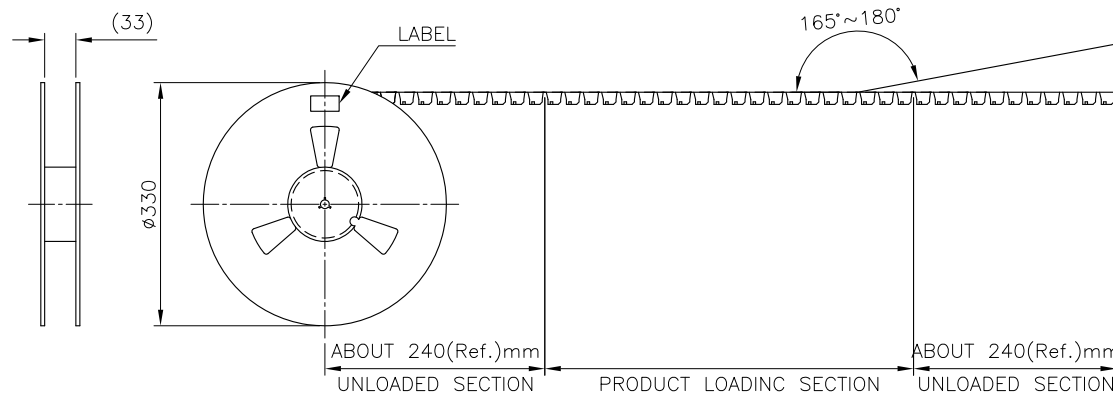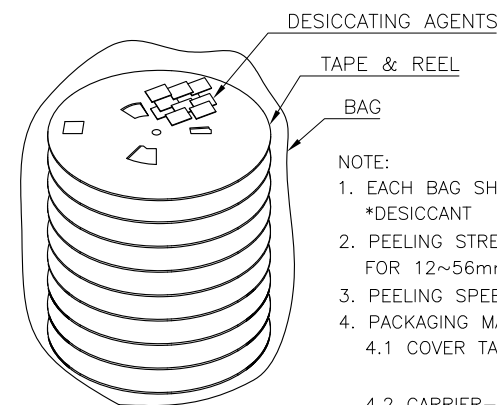DETAIL C
SCALE 4:1

NOTE:

1. EACH BAG SHALL BE INCLUDED:
*DESICCANT
2. PEELING STRENGTH: $0.1 \sim 1.3N$ ($1 \sim 130$ GRAMS) FOR $12 \sim 56$ mm WIDE CARRIER TAPES
3. PEELING SPEED: 300mm/MINUTES.
4. PACKAGING MATERIAL:
 - 4.1 COVER TAPE—COMPOSITE OF POLYETHYLENE TEREPHTHALATE (PET)
 - 4.2 CARRIER—POLYSTYRENE (PS)
 - 4.3 CARRIER REEL—POLYSTYRENE

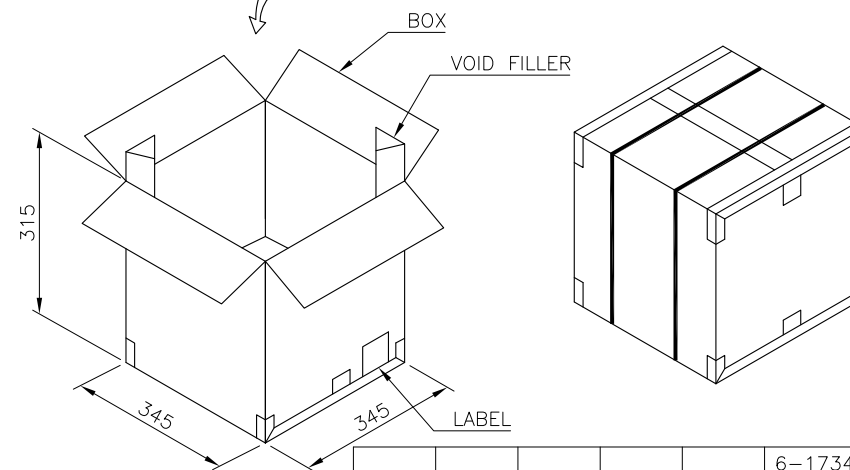

8.5KG	6.1KG	180	8	1440	6-1734324-5~8
					3-1734324-X
					1-1734324-X
GROSS WEIGHT	NET WEIGHT	PCS /REEL	REEL /BOX	PCS /BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	$\pm .$
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	$\pm .$
ANGLES	$\pm 3^{\circ}$

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME

MODULAR JACK CONNECTOR
RJ45 WITH LED, 8P8C, SHIELDED
TAB DOWN, DIP TYPE, H=11.3mm

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734324

SCALE

SHEET

7 of 7

REV

A5