


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS				DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	B	P/ns corrected		11/18/92			JL	
1199	C	Redrawn & Renamed was CPT-TY-***, -TV-***	JWM	11/19/01	JC	11/26/01	JC	11/26/01

NOTES:

1. Material: Electro-tin plated copper
2. Operating Temp: -40°F to 221°F (-40°C ~ 105°C)
3. Voltage rating: 600V Building Wire
1000V Signs & Fixtures
4. UL Recognized for use on stranded wire only

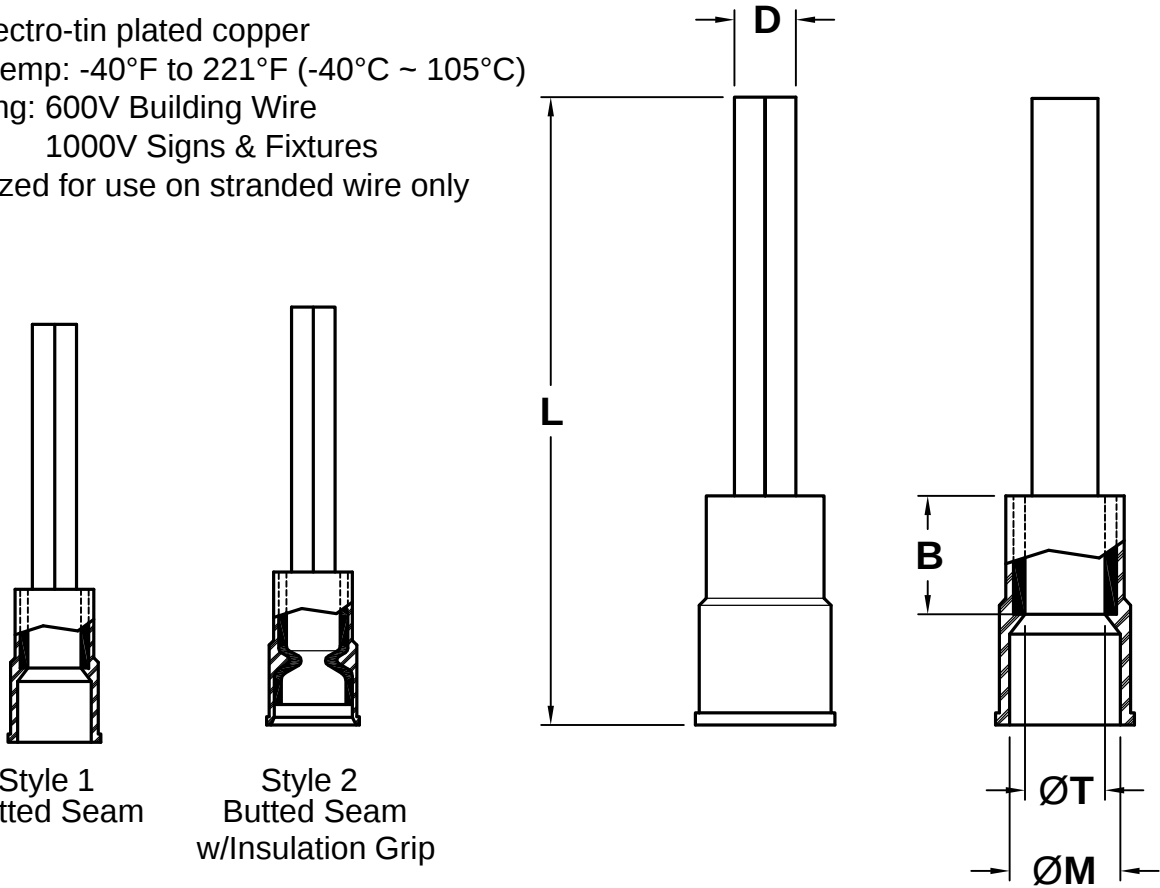

Style 1
Butted Seam

Style 2
Butted Seam
w/Insulation Grip

PART NUMBER	WIRE RANGE (AWG)	PIN DIAMETER D	L	B	T	M	COLOR	Insulator	Flammability	Style
CPT-TV-1012	12 - 10	.110	1.105	.25	.135	.250	YELLOW	Vinyl (PVC)	UL94V-0	1
CPT-TV-1416	16 - 14	.080	.91	.25	.090	.170	BLUE	Vinyl (PVC)	UL94V-0	1
CPT-TV-1822	22 - 18	.080	.93	.25	.070	.145	RED	Vinyl (PVC)	UL94V-0	1
CPT-TY-1012	12 - 10	.110	1.105	.25	.135	.250	YELLOW	Nylon 6/6	UL94V-2	2
CPT-TY-1416	16 - 14	.080	.91	.25	.090	.170	BLUE	Nylon 6/6	UL94V-2	2
CPT-TY-1822	22 - 18	.080	.93	.25	.070	.145	RED	Nylon 6/6	UL94V-2	2

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

Tolerances: Unless Otherwise Specified: .X = ±.015 .XX = ±.010 .XXX = ±.005	DRAWN BY:	DATE:	DRAWING TITLE:			
	JP	3/9/92	Insulated Pin Terminals			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	JC	4/27/92	A	TA-453	TA-453.dwg	C
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1
	JL	5/11/92				