


INDUSTRY STANDARDS:
POLYCARBONATE (LIGHT GRAY AND CLEAR)
UL94-HB FLAMMABILITY RATING (UL FILE #E41613)
UV STABILIZED
SERVICE TEMPERATURE RANGE: -40°C TO +120°C
ABS (DARK GRAY)
UL94-HB FLAMMABILITY RATING (UL FILE #E56070)
SERVICE TEMPERATURE RANGE: -40°C TO +80°C

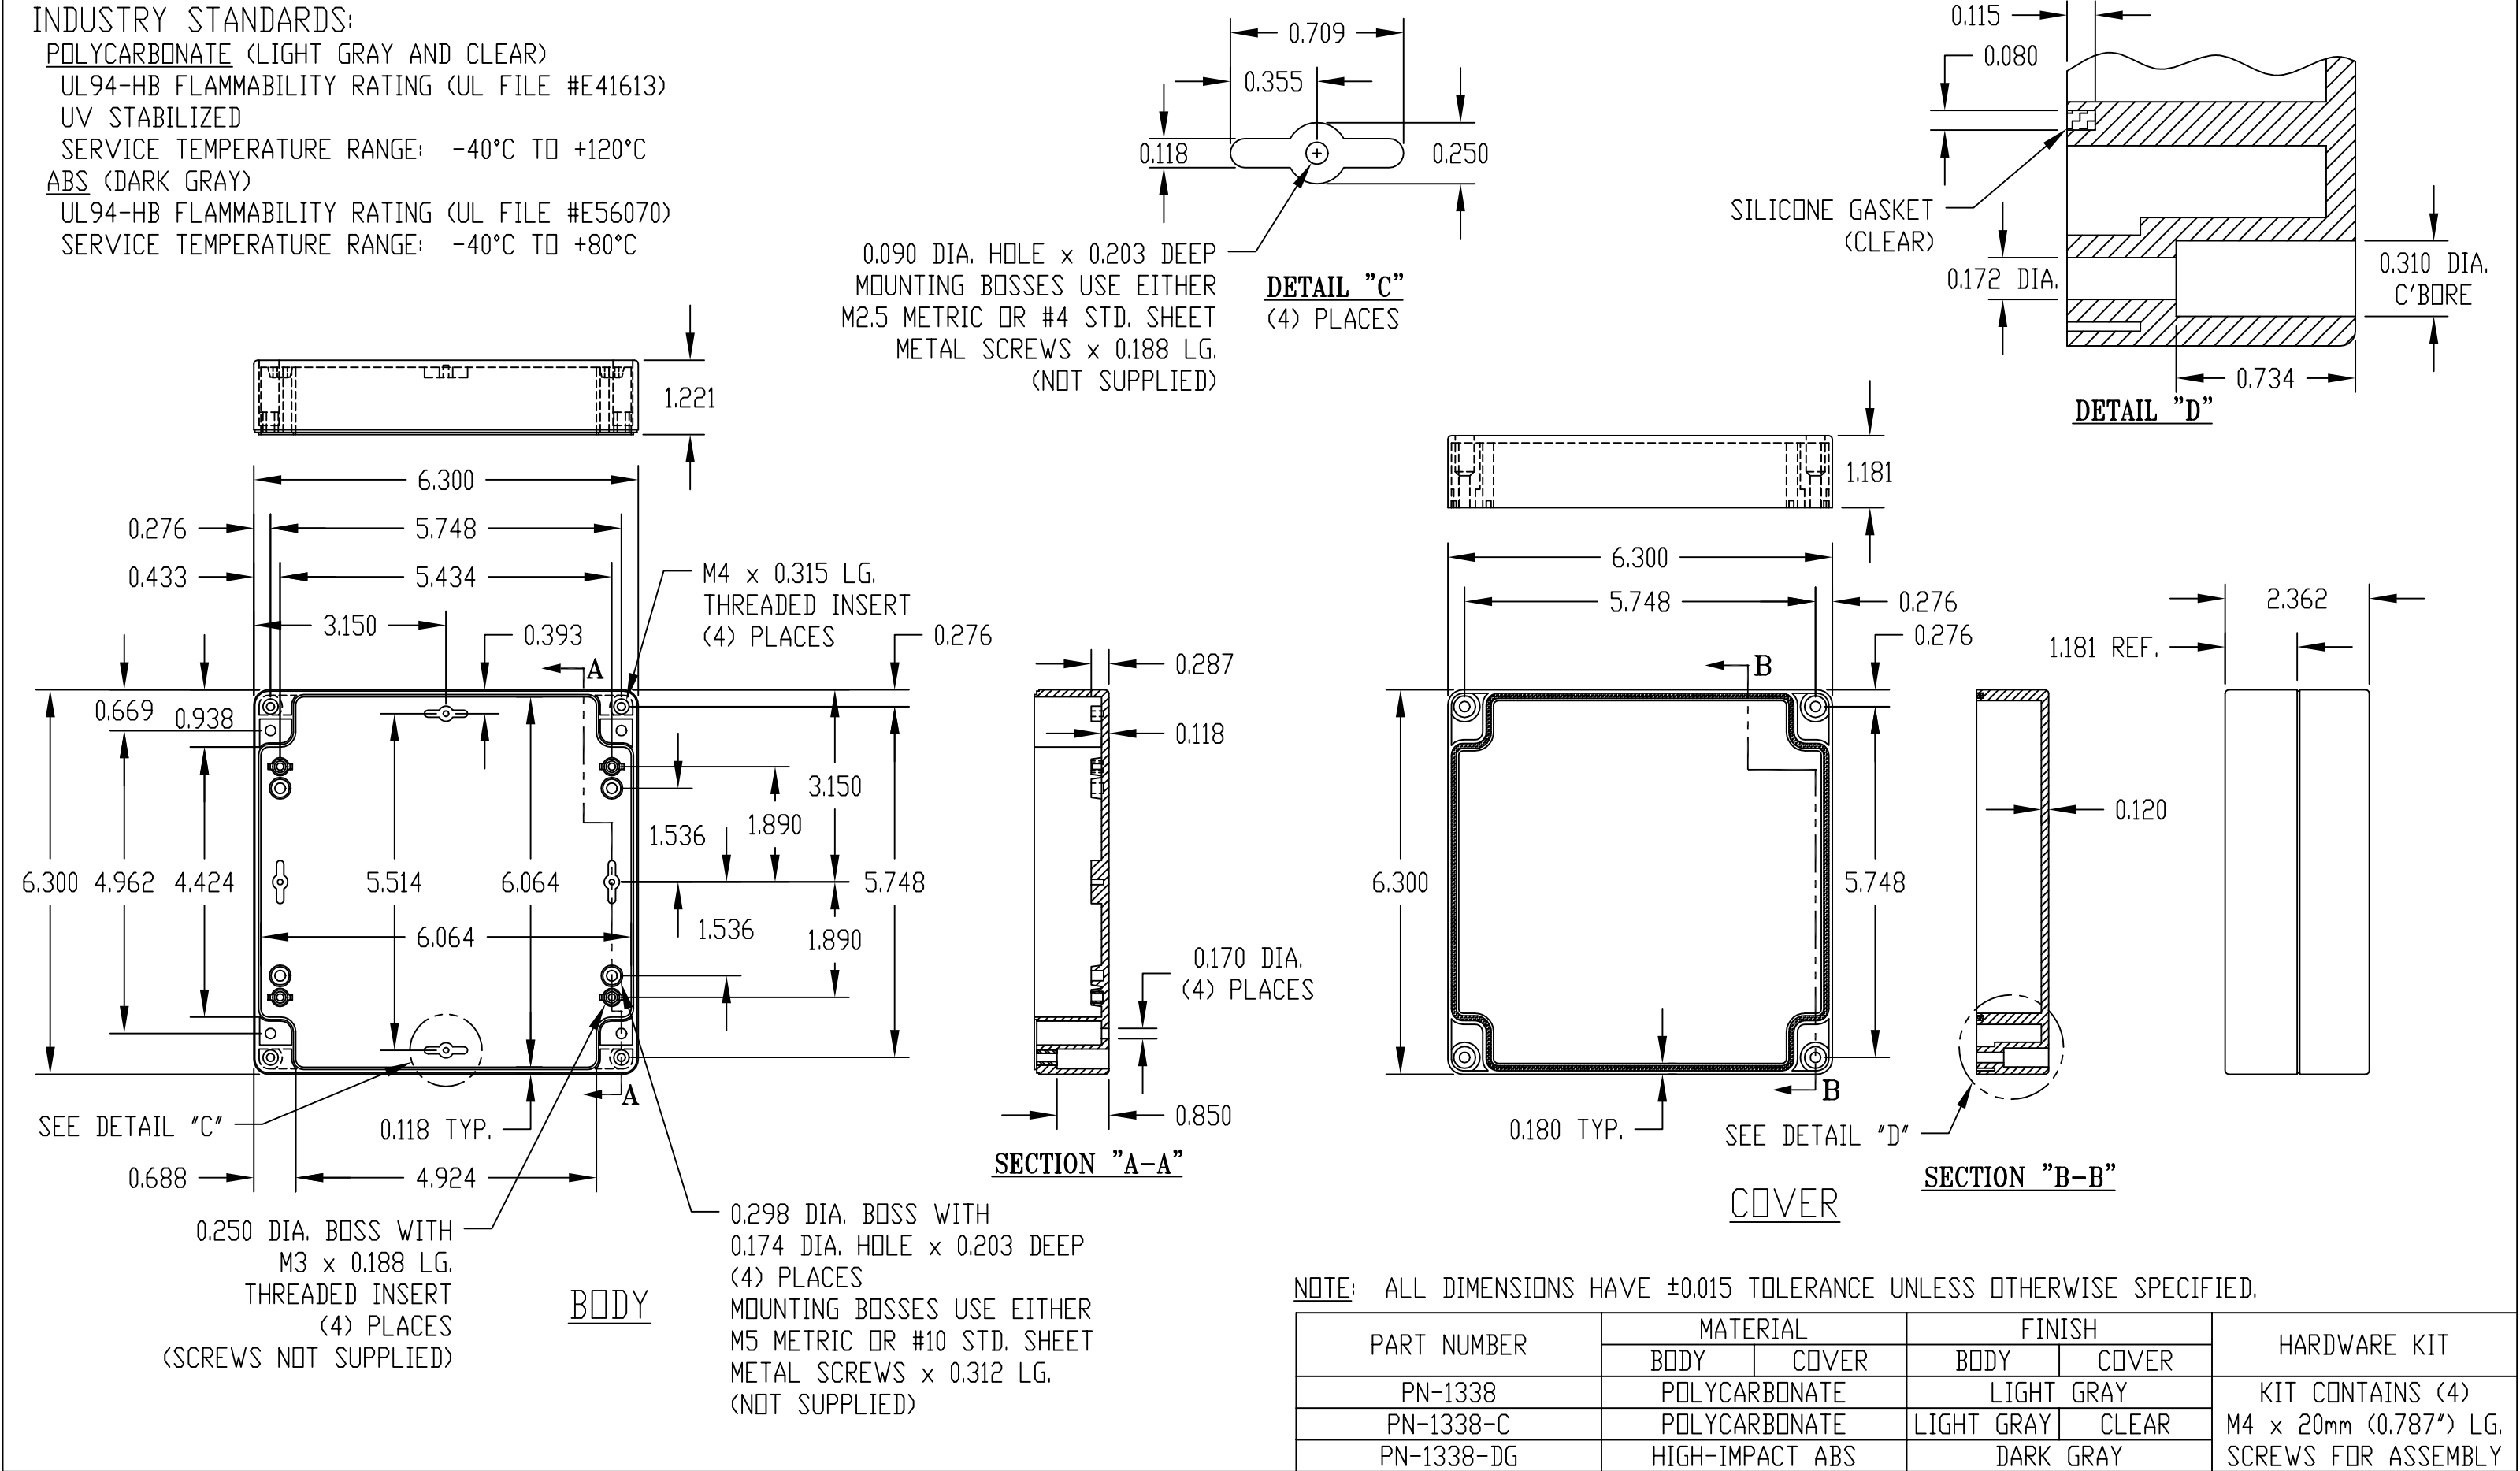

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bud Industries:](#)

[PN-1338-DG](#) [PN-1338](#) [PN-1338-C](#)