


Features

- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- Very Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- **Lead Free Finish, RoHS Compliant (Note 2)**

Mechanical Data

- Case: D²PAK
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Bright Tin. Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Marking: Type Number
- Ordering Information: See Page 2
- Weight: 1.7 grams (approximate)

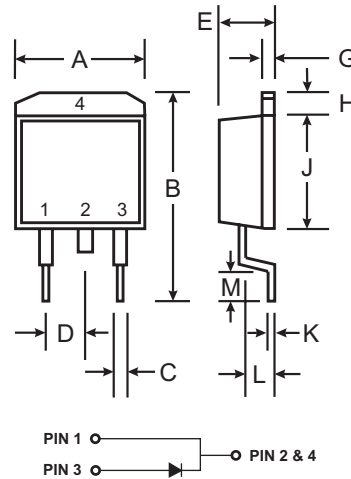

D ² PAK		
Dim	Min	Max
A	9.65	10.69
B	14.60	15.88
C	0.51	1.14
D	2.29	2.79
E	4.37	4.83
G	1.14	1.40
H	1.14	1.40
J	8.25	9.25
K	0.30	0.64
L	2.03	2.92
M	2.29	2.79
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SBG1025L	SBG1030L	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	25	30	V
RMS Reverse Voltage	$V_R(RMS)$	18	21	V
Average Rectified Output Current @ T _C = 120°C	I _O	10		A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	200		A
Typical Thermal Resistance Junction to Case (Note 1)	R _{θJC}	3.0		°C/W
Operating Temperature Range	T _J	-65 to +125		°C
Storage Temperature Range	T _{STG}	-65 to +150		°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage SBG1025L SBG1030L	$V_{(BR)R}$	25 30	— —	— —	V V	I _R = 1mA
Forward Voltage	V_{FM}	— — — —	— 0.34 — 0.48	0.45 0.36 0.55 0.50	V	@ I _F = 10A, T _C = 25°C @ I _F = 10A, T _C = 125°C @ I _F = 20A, T _C = 25°C @ I _F = 20A, T _C = 125°C
Peak Reverse Current at Rated DC Blocking Voltage	I _{RM}	— —	— 150	1.0 260	mA	@ T _C = 25°C @ T _C = 125°C
Typical Junction Capacitance	C _j	—	350	—	pF	f = 1.0MHz, V _R = 4.0V DC

- Notes: 1. Thermal resistance: junction to case mounted on heat sink.
 2. RoHS revision 13.2.2003. Glass and Temperature Solder Exemptions Applied, See EU Directive Annex Notes 5 and 7.

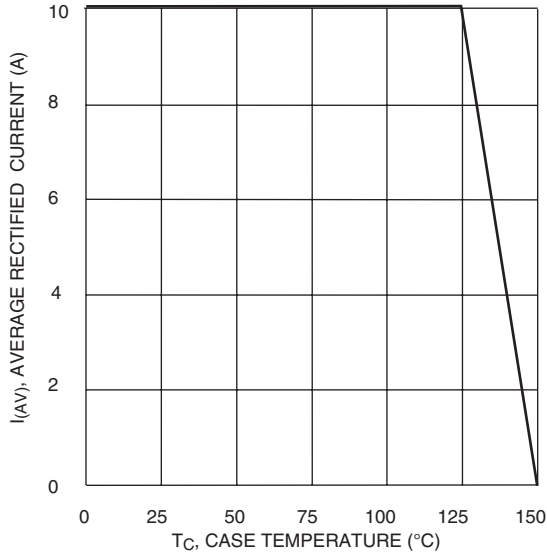


Fig. 1 Forward Derating Curve

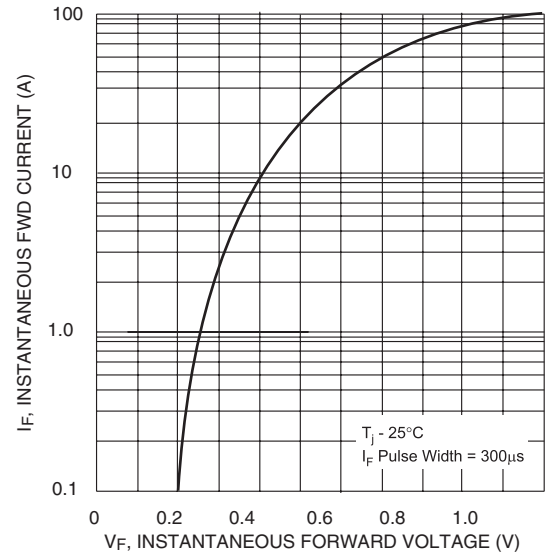


Fig. 2 Typical Forward Characteristics

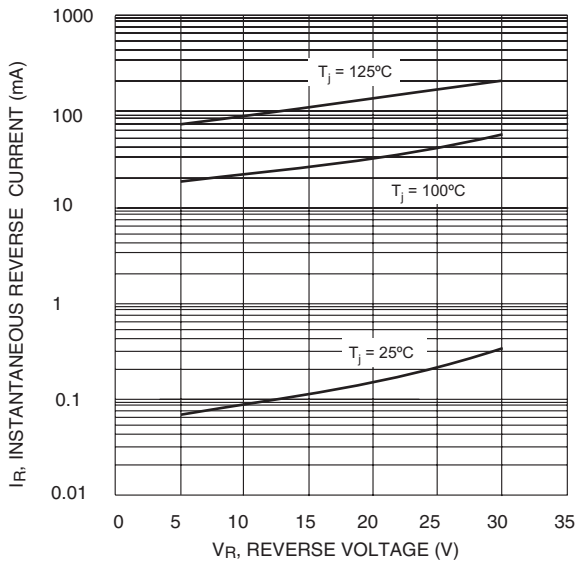


Fig. 3 Typical Reverse Characteristics

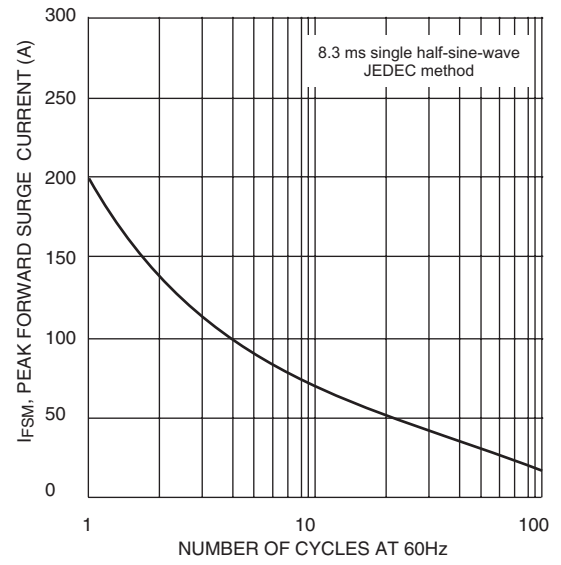


Fig. 4 Maximum Non-Repetitive Surge Current

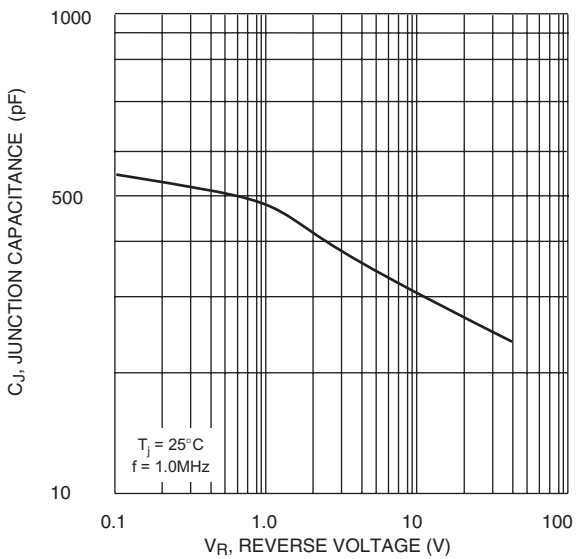


Fig. 5 Typical Junction Capacitance

Ordering Information (Note 3)

Device	Packaging	Shipping
SBG1025L-F	D ² PAK	50/Tube
SBG1025L-T-F	D ² PAK	800/Tape & Reel
SBG1030L-F	D ² PAK	50/Tube
SBG1030L-T-F	D ² PAK	800/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



SBG10XXL = Product type marking code (SBG1025L or SBG1030L)
 ☐|| = Manufacturers' code marking
 YWW = Date code marking
 Y = Last digit of year ex: 2 for 2002
 WW = Week code 01 to 52

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.