


SN54HCT664, SN54HCT665, SN74HCT664, SN74HCT665 OCTAL BUS TRANSCEIVERS WITH PARITY


D2839, MARCH 1984—REVISED SEPTEMBER 1987

- Inputs are TTL-Voltage Compatible
- Bus Transceivers with Inverting Outputs ('HCT664) or True Outputs ('HCT665)
- Generates a Parity Bit for A Bus and B Bus
- Easily Cascadable
- Internal Active Pull-Ups and Pull-Downs
- High-Current 3-State Outputs Can Drive Up to 15 LSTTL Loads
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability

SN54HCT664, SN54HCT665 . . . JT PACKAGE
SN74HCT664, SN74HCT665 . . . DW OR NT PACKAGE
(TOP VIEW)



SN54HCT664, SN54HCT665 . . . FK PACKAGE
(TOP VIEW)



NC—No internal connection

description

These octal bus transceivers are designed for asynchronous, bidirectional communication between data buses. The devices transmit data from the A Bus to the B Bus or from the B Bus to the A Bus, depending on the level at the direction control input, DIR. The enable input, G, can be used to disable the device so that the buses are isolated. These devices will also generate parity outputs, APO and BPO, which reflect the number of high levels at the A Bus and B Bus, respectively, taking into account the parity inputs API and BPI.

The bidirectional I/O ports feature active circuitry on the input stage that, when the output shared by that pin is disabled, will maintain the input in the last state taken by the output. This state will be maintained until changed by the activity on the bus. The advantage of this arrangement is that when all outputs on the bus are disabled, the inputs will be prevented from floating, resulting in minimum power dissipation and minimum susceptibility to noise. This eliminates any need for external pull-up or pull-down resistors. The parity inputs API and BPI have similar circuitry. For further information, see the Typical Application Data on the 'HC664, and 'HC665 data sheet.

The input threshold voltages on these devices are adjusted to be TTL compatible, allowing direct interface to TTL levels on the bus or to memories with TTL output voltage levels.

The SN54HCT664 and SN54HCT665 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74HCT664 and SN74HCT665 are characterized for operation from -40°C to 85°C .

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1984, Texas Instruments Incorporated

2-625

2

HCMOS Devices

SN54HCT664, SN54HCT665, SN74HCT664, SN74HCT665
OCTAL BUS TRANSCEIVERS WITH PARITY



FUNCTION TABLE

CONTROL INPUTS		NUMBER OF HIGH INPUTS ON B BUS AND BPI	NUMBER OF HIGH INPUTS ON A BUS AND API	OUTPUTS		OPERATION	
$\bar{G}$	DIR			APO	BPO	'HCT664	'HCT665
L	L	X	0, 2, 4, 6, 8	Z	H	$\bar{B}$ Data to A Bus	B Data to A Bus
		X	1, 3, 5, 7, 9	Z	L		
L	H	0, 2, 4, 6, 8	X	H	Z	$\bar{A}$ Data to B Bus	A Data to B Bus
		1, 3, 5, 7, 9	X	L	Z		
H	X	X	X	Z	Z	Isolation	Isolation

2

logic symbols†


HCMOS Devices

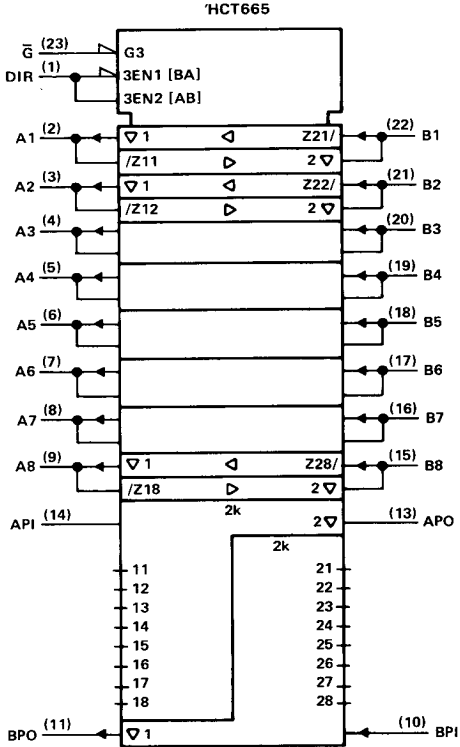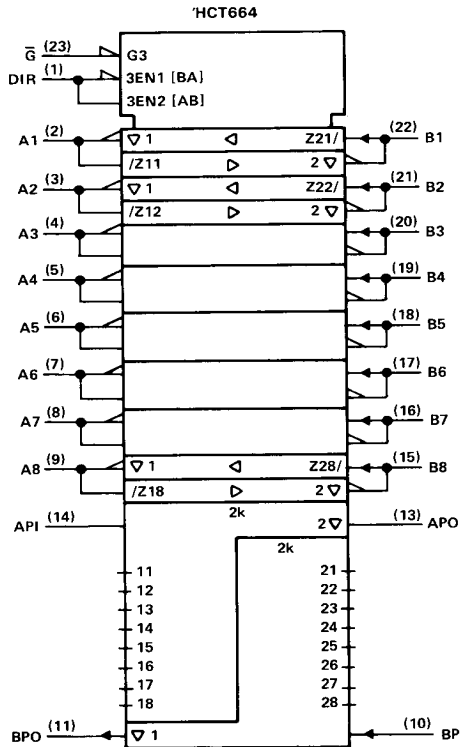

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, JT, and NT packages.

SN54HCT664, SN54HCT665, SN74HCT664, SN74HCT665
OCTAL BUS TRANSCEIVERS WITH PARITY

logic diagram (positive logic)

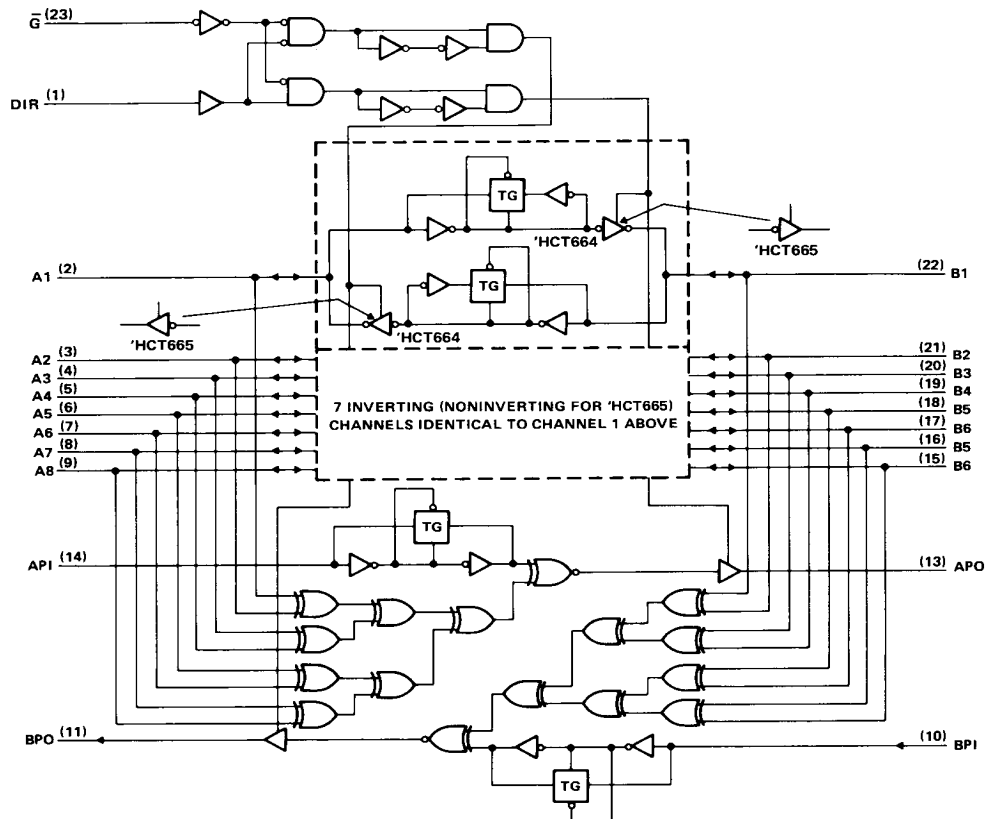

Pin numbers shown are for DW, JT, and NT packages.

2

HCMOS Devices

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2-627

SN54HCT664, SN54HCT665, SN74HCT664, SN74HCT665
OCTAL BUS TRANSCEIVERS WITH PARITY

absolute maximum ratings over operating free-air temperature range†

Supply voltage, V_{CC}	–0.5 V to 7 V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	± 20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	± 20 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	± 35 mA
Continuous current through V_{CC} or GND pins	± 70 mA
Lead temperature 1,6 mm (1/16 in) from case for 60 s: FK or JT package	300°C
Lead temperature 1,6 mm (1/16 in) from case for 10 s: DW or NT package	260°C
Storage temperature range	–65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions

			SN54HCT664 SN54HCT665			SN74HCT664 SN74HCT665			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	$V_{CC} = 4.5$ V to 5.5 V	2			2			V
V_{IL}	Low-level input voltage	$V_{CC} = 4.5$ V to 5.5 V	0		0.8	0		0.8	V
V_I	Input voltage		0		V_{CC}	0		V_{CC}	V
V_O	Output voltage		0		V_{CC}	0		V_{CC}	V
t_t	Input transition (rise and fall) times		0		500	0		500	ns
T_A	Operating free-air temperature		–55		125	–40		85	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V_{CC}	$T_A = 25^\circ\text{C}$			SN54HCT664 SN54HCT665	SN74HCT664 SN74HCT665	UNIT
			MIN	TYP	MAX	MIN	MAX	
V_{OH}	$V_I = V_{IH}$ or V_{IL} , $I_{OH} = -20$ μA	4.5 V	4.4	4.499		4.4		V
	$V_I = V_{IH}$ or V_{IL} , $I_{OH} = -6$ mA	4.5 V	3.98	4.30		3.7	3.84	
V_{OL}	$V_I = V_{IH}$ or V_{IL} , $I_{OL} = 20$ μA	4.5 V		0.001	0.1		0.1	V
	$V_I = V_{IH}$ or V_{IL} , $I_{OL} = 6$ mA	4.5 V		0.17	0.26		0.4	
I_I	$V_I = V_{CC}$ or 0	5.5 V		± 0.1	± 100		± 1000	nA
I_{OZ}	$V_O = V_{CC}$ or 0, $V_I = V_{IH}$ or V_{IL}	5.5 V		± 0.01	± 0.5		± 10	μA
I_{CC}	$V_I = V_{CC}$ or 0, $I_O = 0$	5.5 V			8		160	μA
$\Delta I_{CC}^\dagger$	One input at 0.5 V or 2.4 V Other inputs at 0 V or V_{CC}	5.5 V		1.4	2.4		3	mA
$C_i^\S$		4.5 to 5.5 V		3	10		10	pF

† This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V_{CC} .

§ This parameter, C_i , does not apply to I/O ports.

SN54HCT664, SN74HCT664 OCTAL BUS TRANCEIVERS WITH PARITY

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), $C_L = 50$ pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	T _A = 25°C			SN54HCT664		SN74HCT664		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{pd}	A or B	B or A	4.5 V		15	30		45		38	ns
			5.5 V		13	27		41		34	
t _{pd}	A or B	APO or BPO	4.5 V		23	46		69		58	ns
			5.5 V		20	41		62		52	
t _{pd}	API or BPI	APO or BPO	4.5 V		15	31		47		39	ns
			5.5 V		14	28		42		35	
t _{en}	$\bar{G}$	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _{dis}	$\bar{G}$	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _{en}	DIR	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _{dis}	DIR	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _t		Any	4.5 V		8	12		18		15	ns
			5.5 V		7	11		16		14	

C _{pd}	Power dissipation capacitance	No load, T _A = 25°C	62 pF typ
-----------------	-------------------------------	--------------------------------	-----------

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), $C_L = 150$ pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	T _A = 25°C			SN54HCT664		SN74HCT664		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{pd}	A or B	B or A	4.5 V		23	47		71		59	ns
			5.5 V		21	42		64		53	
t _{pd}	A or B	APO or BPO	4.5 V		31	63		95		79	ns
			5.5 V		28	56		85		71	
t _{pd}	API or BPI	APO or BPO	4.5 V		24	48		73		60	ns
			5.5 V		21	43		65		54	
t _{en}	$\bar{G}$	A or B	4.5 V		34	68		103		85	ns
			5.5 V		30	61		92		77	
t _{en}	DIR	A or B	4.5 V		34	68		103		85	ns
			5.5 V		30	61		92		77	
t _t		Any	4.5 V		17	42		63		53	ns
			5.5 V		14	38		57		48	

Note 1: Load circuits and voltage waveforms are shown in Section 1.

For typical application data and a description of the unique input structure, see the 'HC664 series data sheet.



POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2-629

SN54HCT665, SN74HCT665
OCTAL BUS TRANCEIVERS WITH PARITY

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), $C_L = 50$ pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	T _A = 25°C			SN54HCT665		SN74HCT665		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{pd}	A or B	B or A	4.5 V		14	28		61		50	ns
			5.5 V		12	25		42		35	
t _{pd}	A or B	APO or BPO	4.5 V		23	46		69		58	ns
			5.5 V		20	41		62		52	
t _{pd}	API or BPI	APO or BPO	4.5 V		15	31		47		39	ns
			5.5 V		14	28		42		35	
t _{en}	$\bar{G}$	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _{dis}	$\bar{G}$	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _{en}	DIR	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _{dis}	DIR	A or B	4.5 V		25	51		77		64	ns
			5.5 V		23	46		69		58	
t _t		Any	4.5 V		8	12		18		15	ns
			5.5 V		7	11		16		14	

C _{pd}	Power dissipation capacitance	No load, T _A = 25°C	62 pF typ
-----------------	-------------------------------	--------------------------------	-----------

switching characteristics over recommended operating free-air temperature range (unless otherwise noted), $C_L = 150$ pF (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC}	T _A = 25°C			SN54HCT665		SN74HCT665		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{pd}	A or B	B or A	4.5 V		22	45		84		69	ns
			5.5 V		20	40		68		56	
t _{pd}	A or B	APO or BPO	4.5 V		31	63		95		79	ns
			5.5 V		28	56		85		71	
t _{pd}	API or BPI	APO or BPO	4.5 V		24	48		73		60	ns
			5.5 V		21	43		65		54	
t _{en}	$\bar{G}$	A or B	4.5 V		34	68		103		85	ns
			5.5 V		30	61		92		77	
t _{en}	DIR	A or B	4.5 V		34	68		103		85	ns
			5.5 V		30	61		92		77	
t _t		Any	4.5 V		17	42		63		53	ns
			5.5 V		14	38		57		48	

Note 1: Load circuits and voltage waveforms are shown in Section 1.

For typical application data and a description of the unique input structure, see the 'HC664 series data sheet.