



American Opto Plus LED Corp.
0.2”SMD Type LED Display
SMA201YG G/W
SMC201YG G/W

● **EDIT HISTORY**

Version A: Nov. 12, 2012

New color data sheet.



American Opto Plus LED Corp.
0.2”SMD Type LED Display
SMA201YG G/W
SMC201YG G/W

● **FEATURES**

- 0.2 inch (5.08 mm) Digit Height.
- Low current operation.
- SMD type.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The SMA201YG G/W and SMC201YG G/W are 0.2 inch (5.08 mm) height Single digits display.

This device utilizes Super Bright Yellow Green LED chip which are made from AlGaInP on a transparent GaAs, substrate.

The display has Gray face, White segment.

● **DEVICE**

PART NO	DESCRIPTION
SMA201YG G/W	Common Anode
SMC201YG G/W	Common Cathode

RoHS Compliance



Pb free.






American Opto Plus LED Corp.

0.2"SMD Type LED Display

SMA201YG G/W

SMC201YG G/W

● MECHANICAL DIMENSIONS

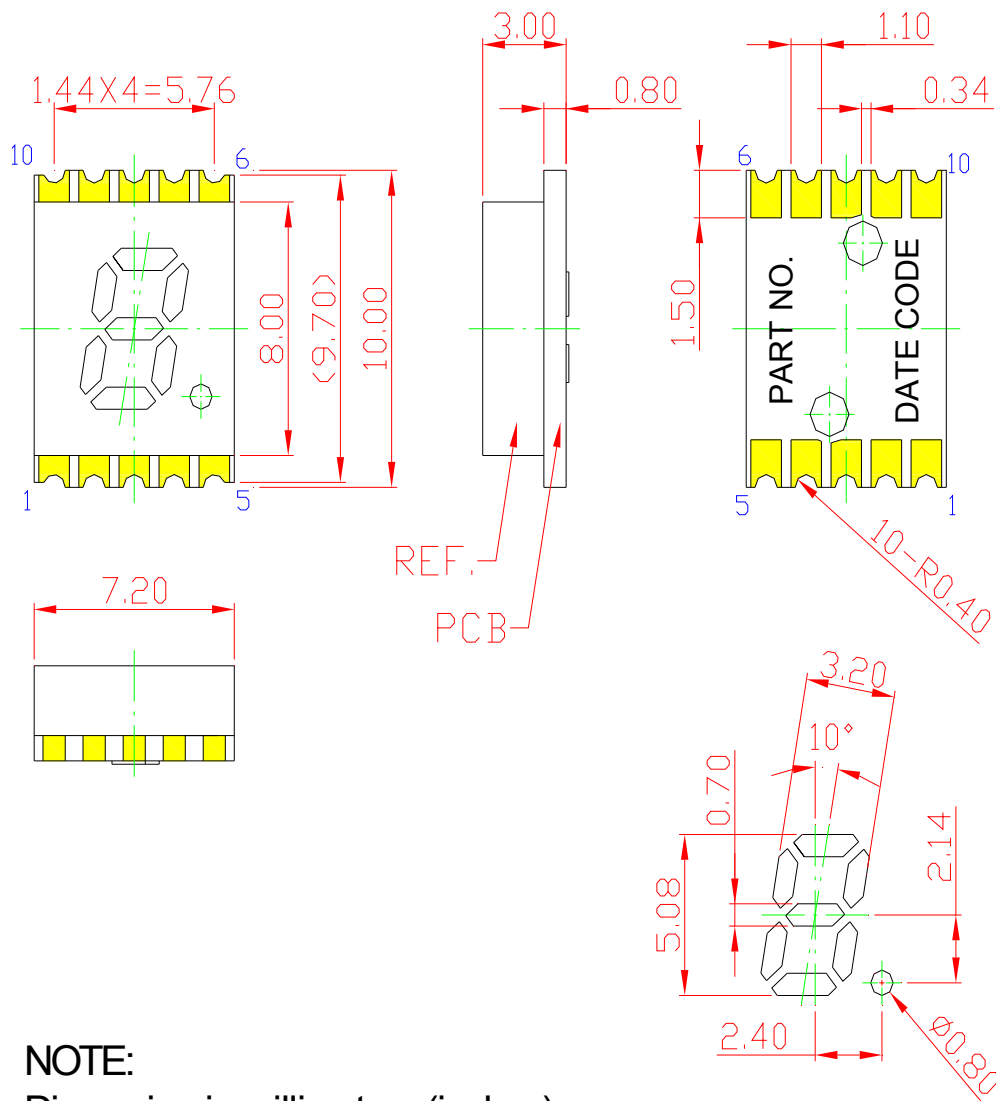

NOTE:


Dimension in millimeters (inches),
and tolerances are $\pm 0.25\text{mm}$ (.01") specified.



American Opto Plus LED Corp.
0.2" SMD Type LED Display
SMA201YG G/W
SMC201YG G/W

● **TYPICAL INTERNAL EQUIVALENT CIRCUIT**

**Recommended
Soldering Pattern**

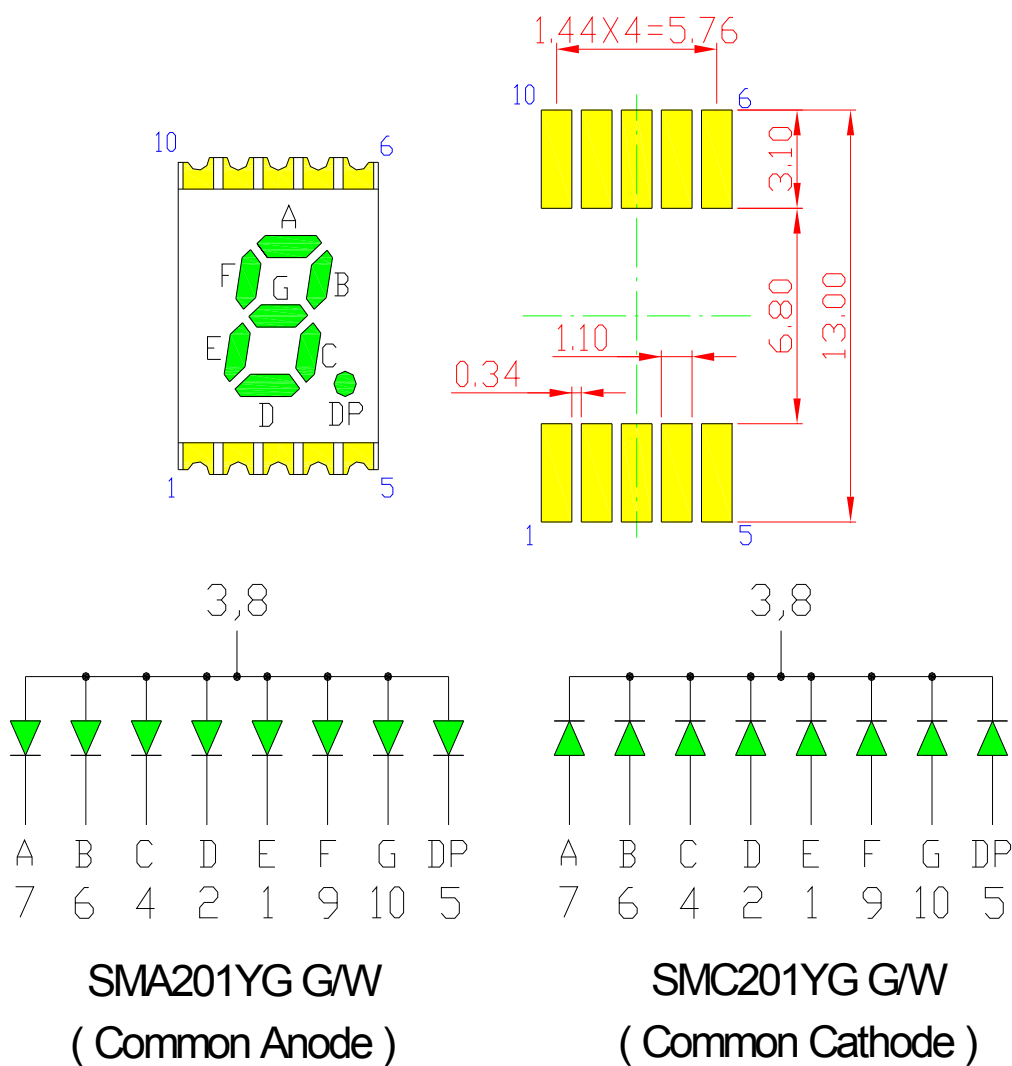



American Opto Plus LED Corp.
0.2”SMD Type LED Display
SMA201YG G/W
SMC201YG G/W

● **YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	70	mW
Derating liner from 25°C	-	0.28	mA / °C
Continuous forward current	I _{AF}	25	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	90	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F =20mA	-	2.1	2.6	V
Reverse Current, (Per Dice)	I _R	V _R =5V	-	-	10	μA
Peak Wavelength	λ _P	I _F =20mA	-	573	-	nm
Dominant Wavelength	λ _D	I _F =20mA	-	570	-	nm
Luminous Intensity	I _V	I _F =20mA	-	6	-	mcd
Spectral radiation bandwidth	Δλ	I _F =20mA	-	20	-	nm



American Opto Plus LED Corp.

0.2"SMD Type LED Display

SMA201YG G/W

SMC201YG G/W

● YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

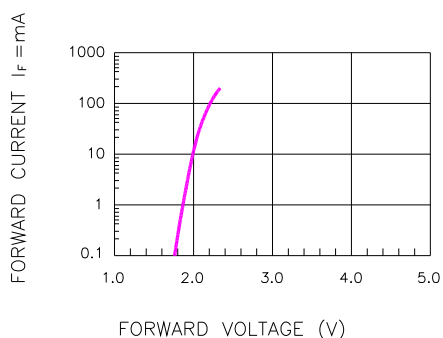


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

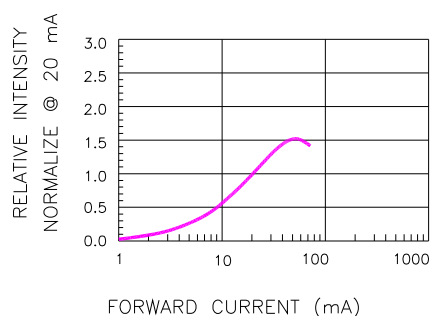


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

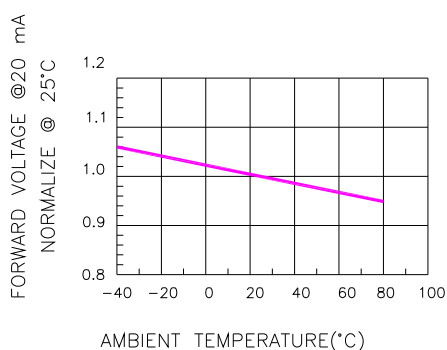


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

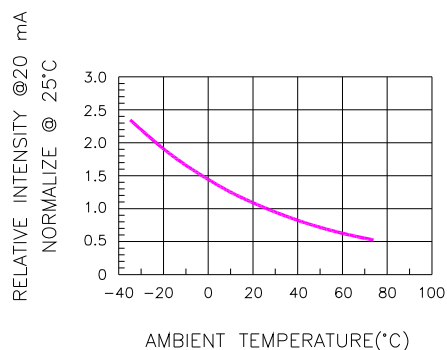


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

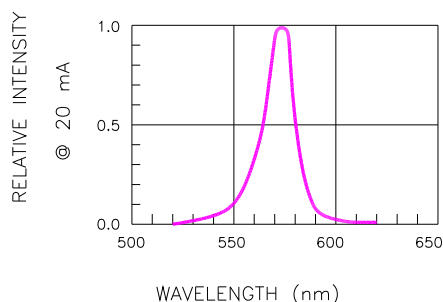


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

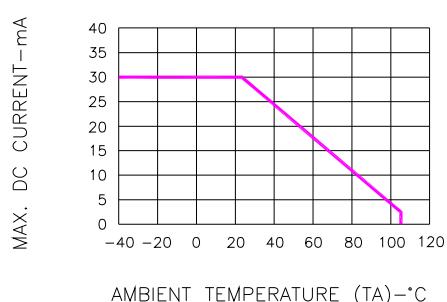


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE




American Opto Plus LED Corp.
0.2" SMD Type LED Display
SMA201YG G/W
SMC201YG G/W

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

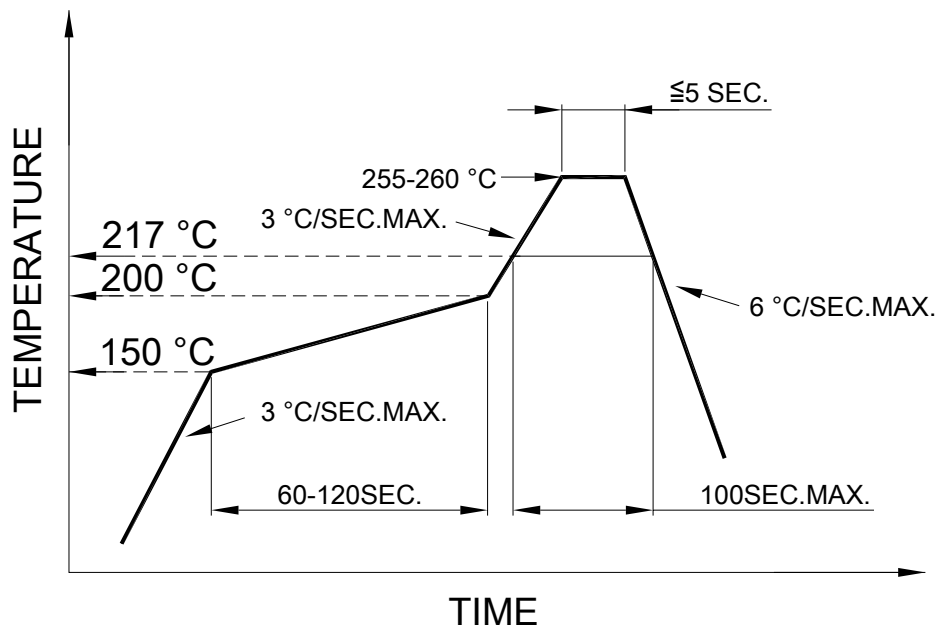

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260 °C. If temperature is higher, time should be shorter (+10 °C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230 °C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350 °C.
- The head of soldering iron cannot touch copper foil.