


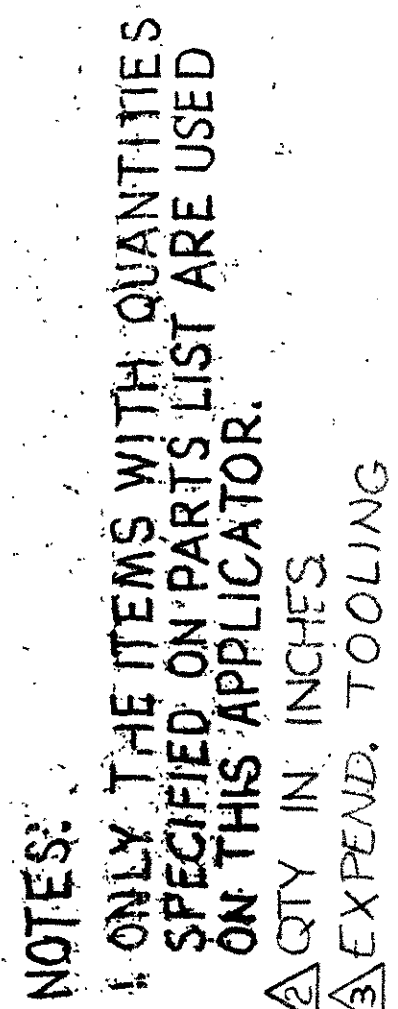

KEY:
 -RECOMMENDED SPARES.
 -GREASE LIGHTLY.

***AIR FEED ASSY.#461065

SHEET 2 OF 2		REMOVE BURRS, BREAK SHARP EDGES .015 R MAX DECIMALS: .005 = .50, .000 = 0.005, .0000 = 0.0000 ANGLES: 60° 30'		-J	
		MATERIAL _____ HEAT TREAT _____ COATING OR PLATING _____ THERMAL FIRST USED _____ 610637		DR <i>John Hanks</i> 2-15-78 APP _____ CHG <i>W. H. Hanks</i> 2-15-78 REL <i>W. H. Hanks</i> 2-15-78  AMP "INCORPORATED" MILWAUKEE, WISCONSIN	
LTR _____ REVISION: RECORD _____ DATE _____ 00779		DATE _____ 00779		MINTR APPL MODULAR PLUG CUSTOMER AND ASSEMBLY DRAWING	