


FEATURES

- Direct Modulation Laser for WDM systems
- Optimized for Long Distance Transmission (Dispersion 1800ps/nm)
- Peak wavelength 1527.99 to 1563.05nm (C-band: 191.8 to 196.2THz, 100GHz spacing)
- Output Power: 10mW
- 14-pin Butterfly type package
- Built-in Optical Isolator, Power Monitor PIN-PD, Thermistor, and Cooler
- Single Mode Fiber

APPLICATIONS

This laser is intended for the application of 2.5 Gb/s long haul Dense Wavelength Division Multiplexing (DWDM). Transmission spans of 100 km (1800ps/nm) are possible.

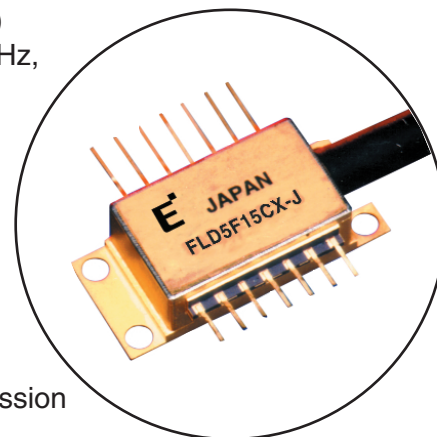

DESCRIPTION

The laser is a high power laser capable of 2.5 Gb/s transmission. It is packaged in a “butterfly” type module. The module employs a high efficiency optical coupling system, coupling the laser output through a built-in optical isolator into a single mode fiber pigtail. The module also includes a monitor photodiode, a thermoelectric cooler (TEC), and thermistor. This device is designed for use in DWDM direct modulation transmission systems. Selected wavelengths specified to the ITU-T grid are available.

ABSOLUTE MAXIMUM RATINGS (T_C=25°C, unless otherwise specified)

Parameter	Symbol	Condition	Ratings		Unit
			Min.	Max.	
Storage Temperature	T _{stg}	-	-40	+85	°C
Operating Case Temperature	T _{op}	-	-20	+70	°C
Optical Output Power	P _f	CW	-	12	mW
LD Forward Current	I _F	CW	-	150	mA
LD Reverse Voltage	V _R	-	-	2	V
PD Reverse Voltage	V _{DR}	-	-	20	V
PD Forward Current	I _{PF}	-	-	10	mA
Cooler Voltage	V _C	Cooling	-	2.5	V
		Heating	-2.5	-	
Cooler Current	I _C	Cooling	-	1.4	A
		Heating	-0.9	-	
Thermistor Temperature	T _{th}	ATC Operation	-20	+70	°C
Lead Soldering Time	T _{sold}	260°C	-	10	sec
Environmental Operating Humidity	X _{op}	Top<30°C	-	95	%
Environmental Storage Humidity	X _{st}	Tstg<30°C	-	95	%

OPTICAL AND ELECTRICAL CHARACTERISTICS ($T_L=T_{set}$, $T_C=25^\circ\text{C}$, BOL, unless otherwise specified)

Parameter	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
Laser Set Temperature	T_{set}	-	20	-	35	$^\circ\text{C}$
Threshold Current	I_{th}	CW	4	-	40	mA
Forward Voltage	V_{FDC}	CW, $I_F=30\text{ mA}$, pin 12, 13	-	1.6	1.75	V
Series Resistance	R_S	CW, pin 12, 13	22	25	28	Ω
Optical Output Power	P_f	CW	10.0	-	-	mW
Slope Efficiency	η	CW, $P_f=10\text{mW}$	0.14	-	-	mW/mA
Threshold Power	P_{th}	$I_F=I_{th}$, CW	-	-	150	μW
Tracking Error (Note 1)	TE	$P_f=10\text{mW}$, $T_C=-20\text{ to }70^\circ\text{C}$, Im-APC	-0.5	-	+0.5	dB
Monitor Current	I_m	CW, $P_f=10\text{mW}$, $V_{DR}=5\text{V}$	0.25	-	2.5	mA
Photodiode Dark Current	I_D	$V_{DR}=5\text{V}$	-	2	100	nA
Photodiode Capacitance	C_t	$V_{DR}=5\text{V}$, $f=1\text{ MHz}$	-	-	10	pF
Photodiode Cutoff Frequency	f_{cm}	$V_{DR}=5\text{V}$, 50Ω load	100	-	-	MHz
Peak Wavelength	λ_p	Note (2)	Note (4)			nm
Wavelength Drift (after 20 yrs)	$\Delta\lambda$	Note (2)	-100	-	+100	pm
Wavelength Stability with Case Temperature	$d\lambda/dT_c$	$T_c=-20\text{ to }70^\circ\text{C}$	-1.0	-	+1.0	pm/ $^\circ\text{C}$
Side Mode Suppression	S_r	Note (2)	35	40	-	dB
Spectral Width (-20dB)	$\delta\lambda$	Note (2)	-	-	0.5	nm
Rise/Fall Time	T_r, T_f	20% to 80%	-	-	0.125	nsec
Cutoff Frequency	f_c	$P_f=10\text{mW}$, -3 dB	3.5	-	-	GHz
RF Return Loss	S_{11}	$f=50\text{ MHz} \sim 2\text{ GHz}$	8	-	-	dB
		$f=2\text{ GHz} \sim 3\text{ GHz}$	6	-	-	dB
		$f=3\text{ GHz} \sim 5\text{ GHz}$	3	-	-	dB
Optical Isolation	I_s	$T_c=-20\text{ to }70^\circ\text{C}$	25	35	-	dB
Relative Intensity Noise	RIN	$f=2.5\text{ GHz}$ $P_f=10\text{ mW}$, ORL=24 dB	-	-	-140	dB/Hz
Kink	Kns	up to 12mW	No Kink			-
Dispersion Penalty	dP	Note (3)	-	-	2.0	dB

Note 1. $TE=10\log(p_f(T_{case})/P_f(T_c=25^\circ\text{C}))(\text{dB})$ Note 2. 2.5 Gb/s NRZ, $P_{peak}=10.0\text{mW}$, $R_{ext}=8.2\text{dB}$, PRBS=2²³-1,Note 3. Bit rate=2.48832 Gb/s, PRBS=2²³-1, Dispersion=1,800 ps/nm, $P_{peak}=10\text{mW}$,
 $R_{ext}=8.2\text{dB}$ Decision point: Center of Back-to-Back at 10⁻⁹, No Floor,

Receiver: Eudyna Standard Receiver

Note 4. The selected wavelengths available are listed in Fig. 8

TEC AND THERMISTOR CHARACTERISTICS ($T_L = T_{set}$, $T_C = 25^\circ\text{C}$, BOL, unless otherwise specified)

Parameter	Symbol	Test Conditions	Limit			Unit
			Min.	Typ.	Max.	
Cooler Current	I_C	$T_L = T_{set}$, $P_f = 10\text{mW}$, $T_C = 70^\circ\text{C}$	-	-	1.0	A
Cooler Voltage	V_C		-	-	2.4	V
Cooler Power	P_C		-	-	2.4	W
Thermistor Resistance	R_{tr}	$T_L = 25^\circ\text{C}$	9.5	10.0	10.5	$k\Omega$
Thermistor B Constant	B		3,270	3,450	3,630	K

Fig. 1 Forward Current vs Output Power

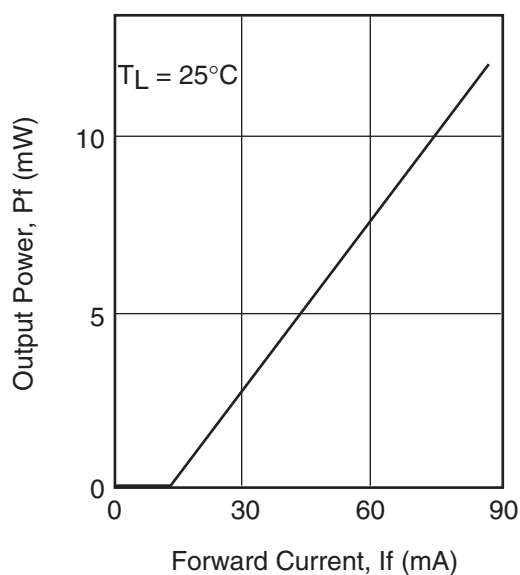


Fig. 2 Frequency Response

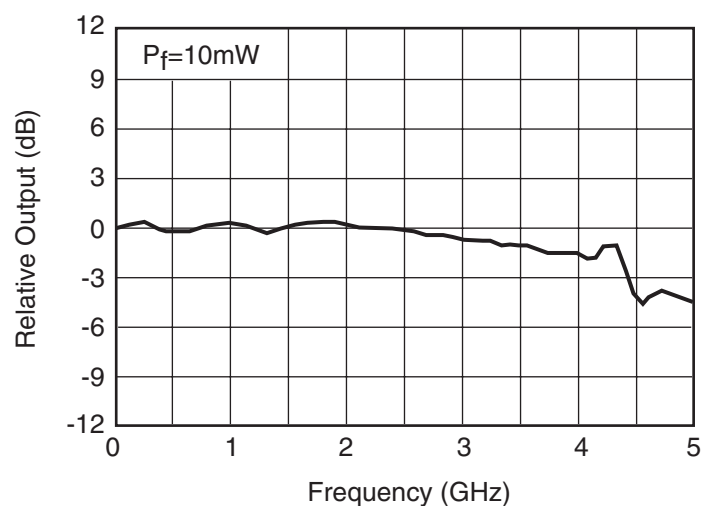


Fig. 3 RF Return Loss

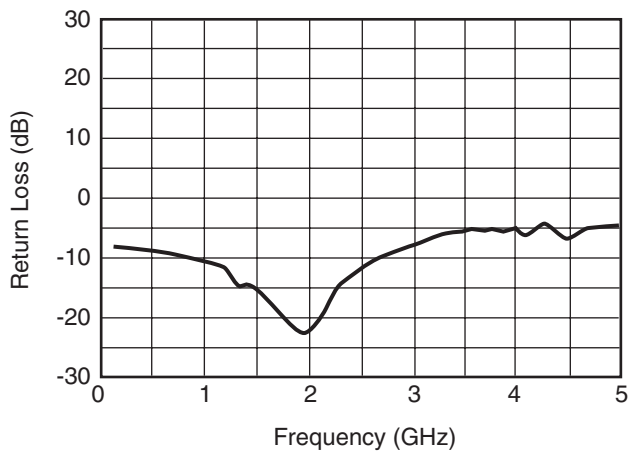


Fig. 4 Cooler Voltage -Current

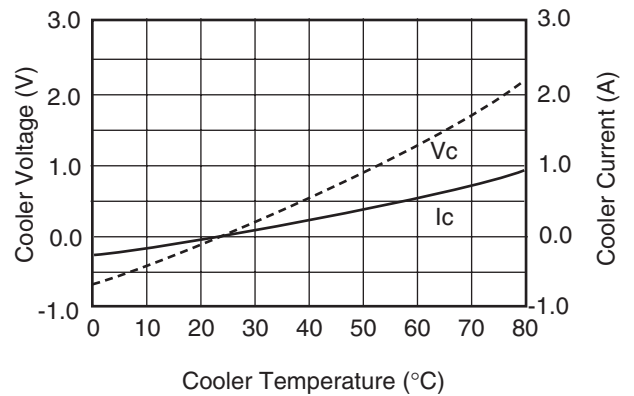


Fig. 5 Spectrum

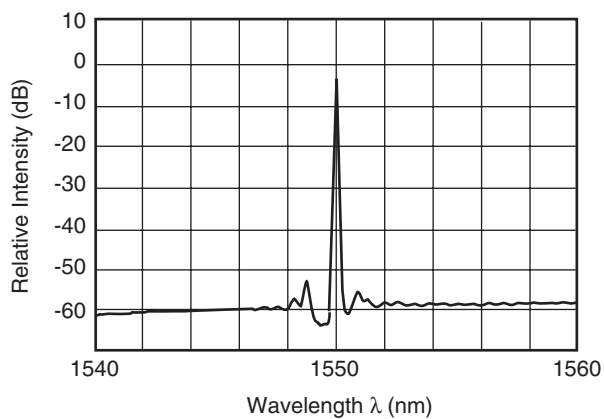


Fig. 6 Temperature Dependence of Wavelength (ACC Operation)

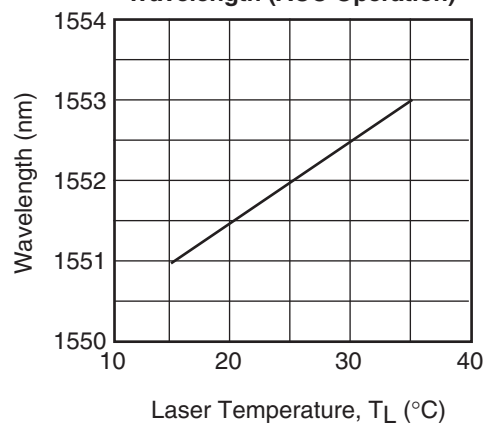


Fig. 7 Transmission Characteristics

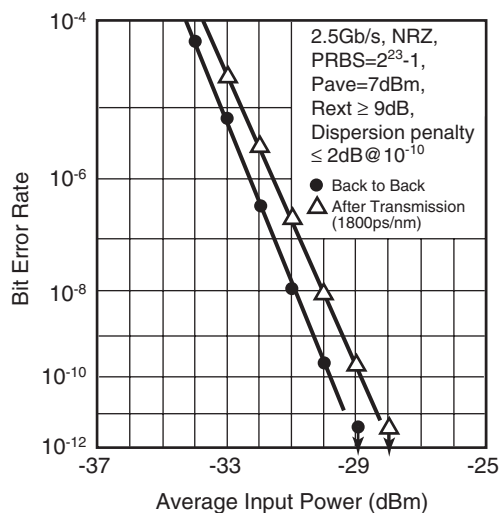



Fig. 8 Wavelength Table

Part Number	Wavelength (nm) (TL=Tset) (in vacuum)	Tolerance (nm)
FLD5F15CX-J9620	1527.99	±0.1
-J9610	1528.77	±0.1
-J9600	1529.55	±0.1
-J9590	1530.33	±0.1
-J9580	1531.12	±0.1
-J9570	1531.90	±0.1
-J9560	1532.68	±0.1
-J9550	1533.47	±0.1
-J9540	1534.25	±0.1
-J9530	1535.04	±0.1
-J9520	1535.82	±0.1
-J9510	1536.61	±0.1
-J9500	1537.40	±0.1
-J9490	1538.19	±0.1
-J9480	1538.98	±0.1
-J9470	1539.77	±0.1
-J9460	1540.56	±0.1
-J9450	1541.35	±0.1
-J9440	1542.14	±0.1
-J9430	1542.94	±0.1
-J9420	1543.73	±0.1

-J9410	1544.53	±0.1
-J9400	1545.32	±0.1
-J9390	1546.12	±0.1
-J9380	1546.92	±0.1
-J9370	1547.72	±0.1
-J9360	1548.51	±0.1
-J9350	1549.32	±0.1
-J9340	1550.12	±0.1
-J9330	1550.92	±0.1
-J9320	1551.72	±0.1
-J9310	1552.52	±0.1
-J9300	1553.33	±0.1
-J9290	1554.13	±0.1
-J9280	1554.94	±0.1
-J9270	1555.75	±0.1
-J9260	1556.55	±0.1
-J9250	1557.36	±0.1
-J9240	1558.17	±0.1
-J9230	1558.98	±0.1
-J9220	1559.79	±0.1
-J9210	1560.61	±0.1
-J9200	1561.42	±0.1
-J9190	1562.23	±0.1
-J9180	1563.05	±0.1


"CX" PACKAGE

UNIT: mm

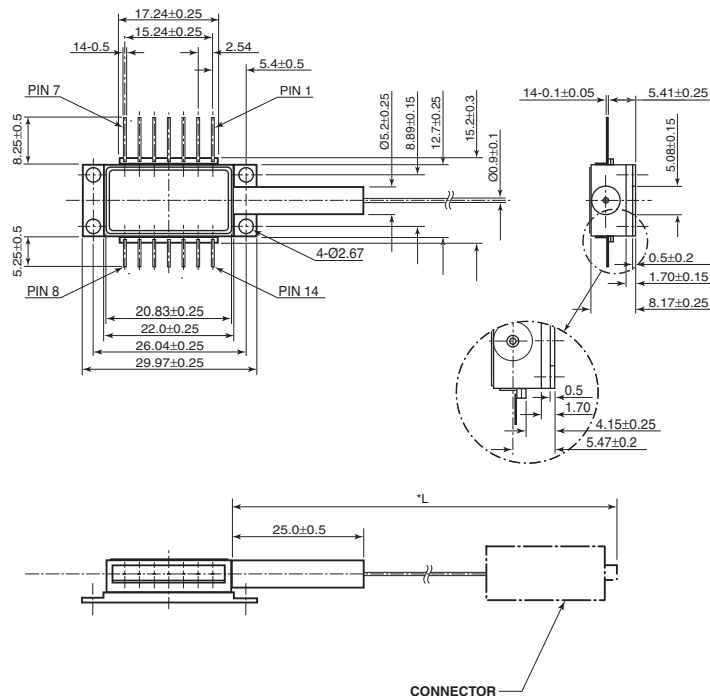

Grounded Type

PIN #	FUNCTION
1.	Thermistor
2.	Thermistor
3.	Laser DC Bias (-)
4.	Monitor (Anode)
5.	Monitor (Cathode)
6.	Thermoelectric Cooler (+)
7.	Thermoelectric Cooler (-)
8.	Case Ground
9.	Case Ground
10.	N.C.
11.	Case Ground
12.	Laser Modulation (-)
13.	Case Ground
14.	N.C.



For further information please contact:

Eudyna Devices USA Inc.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
TEL: (408) 232-9500
FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.

Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
United Kingdom
TEL: +44 (0) 1628 504800
FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte Ltd.

Hong Kong Branch
Rm. 1101, Ocean Centre, 5 Canton Rd.
Tsim Sha Tsui, Kowloon, Hong Kong
TEL: +852-2377-0227
FAX: +852-2377-3921

Eudyna Devices Inc.

Sales Division
1, Kanai-cho, Sakae-ku
Yokohama, 244-0845, Japan
TEL: +81-45-853-8156
FAX: +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put this product into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
Printed in U.S.A.