

TENTATIVE

TC74HC4002P DUAL 4-INPUT NOR GATE

The TC74HC4002 is a high speed CMOS 4-INPUT NOR GATE fabricated with silicon gate CMOS technology.


It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

The internal circuit is composed of 3 stage including buffer output, which enables high noise immunity and stable output.

All inputs are equipped with protection circuit against static discharge or transient excess voltage.


FEATURES:

- High Speed..... $t_{pd}=11\text{ns}$ (Typ.) at $V_{CC}=5\text{V}$
- Low Power Dissipation..... $I_{CC}=1\mu\text{A}$ (Max.) at $T_a=25^\circ\text{C}$
- High Noise Immunity..... $V_{NIH}=V_{NIL}=28\% V_{CC}$ (Min.)
- Output Drive Capability.....10 LSTTL Loads
- Symmetrical Output Impedance... $|I_{OH}|=I_{OL}=4\text{mA}$ (Min.)
- Balanced Propagation Delays... $t_{pLH} \div t_{pHL}$
- Wide Operating Voltage Range... $V_{CC}(\text{opr})=2\text{V} \sim 6\text{V}$
- Pin and Function Compatible with 4002B




DIP (5-21P)

LOGIC DIAGRAM (PER GATE)

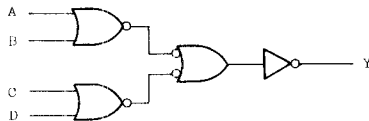

PIN ASSIGNMENT



(TOP VIEW)


TC74HC4002P

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage Range	V_{CC}	$-0.5 \sim 7$	V
DC Input Voltage	V_{IN}	$-0.5 \sim V_{CC}+0.5$	V
DC Output Voltage	V_{OUT}	$-0.5 \sim V_{CC}+0.5$	V
Input Diode Current	I_{IK}	± 20	mA
Output Diode Current	I_{OK}	± 20	mA
DC Output Current	I_{OUT}	± 25	mA
DC V_{CC} /Ground Current	I_{CC}	± 50	mA
Power Dissipation	P_d	500*	mW
Storage Temperature	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$
Lead Temperature 10sec	T_L	300	$^{\circ}\text{C}$

* 500mW in the range of $T_a = -40^{\circ}\text{C} \sim 65^{\circ}\text{C}$.
and from $T_a = 65^{\circ}\text{C}$ up to 85°C derating factor of $-10\text{mW}/^{\circ}\text{C}$ shall be applied until 300mW.

INPUT and OUTPUT EQUIVALENT CIRCUIT



RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	LIMIT	UNIT
Supply Voltage	V_{CC}	$2 \sim 6$	V
Input Voltage	V_{IN}	$0 \sim V_{CC}$	V
Output Voltage	V_{OUT}	$0 \sim V_{CC}$	V
Operating Temperature	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Input Rise and Fall Time	$t_{r,tf}$	$0 \sim 500$	ns

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	$T_a = 25^{\circ}\text{C}$				$T_a = -40 \sim 85^{\circ}\text{C}$		UNIT
			V_{CC}	MIN.	TYP.	MAX.	MIN.	MAX.	
High-Level Input Voltage	V_{IH}		2.0	1.5	-	-	1.5	-	V
			4.5	3.15	-	-	3.15	-	
			6.0	4.2	-	-	4.2	-	
Low-Level Input Voltage	V_{IL}		2.0	-	-	0.5	-	0.5	V
			4.5	-	-	1.35	-	1.35	
			6.0	-	-	1.8	-	1.8	
High-Level Output Voltage	V_{OH}	$V_{IN} = V_{IL}$	$I_{OH} = -20\mu\text{A}$	2.0	1.9	2.0	-	1.9	V
				4.5	4.4	4.5	-	4.4	
				6.0	5.9	6.0	-	5.9	
			$I_{OH} = -4\text{mA}$	4.5	4.18	4.31	-	4.13	
			$I_{OH} = -5.2\text{mA}$	6.0	5.68	5.80	-	5.63	

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION		VCC	Ta=25°C			Ta=-40~85°C		UNIT
					MIN.	TYP.	MAX.	MIN.	MAX.	
Low-Level Output Voltage	VOL	VIN=VIH or VIL	IOL=20μA	2.0	-	0.0	0.1	-	0.1	V
				4.5	-	0.0	0.1	-	0.1	
				6.0	-	0.0	0.1	-	0.1	
			IOL=4mA	4.5	-	0.17	0.32	-	0.37	
			IOL=5.2mA	6.0	-	0.18	0.32	-	0.37	
Input Leakage Current	IIN	VIN=VCC or GND	6.0	-	-	±0.1	-	±1.0	μA	
Quiescent Supply Current	ICC	VIN=VCC or GND	6.0	-	-	1.0	-	10.0		

AC ELECTRICAL CHARACTERISTICS (C_L=50pF, Input t_r=t_f=6ns)


PARAMETER	SYMBOL	TEST CONDITION	V _{CC}	Ta=25°C			Ta=-40~85°C		UNIT
				MIN.	TYP.	MAX.	MIN.	MAX.	
Output Transition Time	t _{TLH} t _{THL}		2.0	-	27	75	-	90	ns
			4.5	-	8	15	-	18	
			6.0	-	7	13	-	16	
Propagation Delay Time	t _{PLH} t _{PHL}		2.0	-	45	110	-	130	ns
			4.5	-	13	22	-	26	
			6.0	-	11	19	-	23	
Input Capacitance	C _{IN}			-	5	10	-	10	pF
Power Dissipation Capacitance	C _{PD}	(Note 1)		-	26	-	-	-	

Note (1) C_{PD} is defined as the value of internal equivalent capacitance of IC which is calculated from the operating current consumption without load (refer to Test Circuit).


Average operating current can be obtained by the equation hereunder.

$$I_{CC(opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/4 \text{ (per Gate)}$$

SWITCHING CHARACTERISTICS TEST CIRCUIT

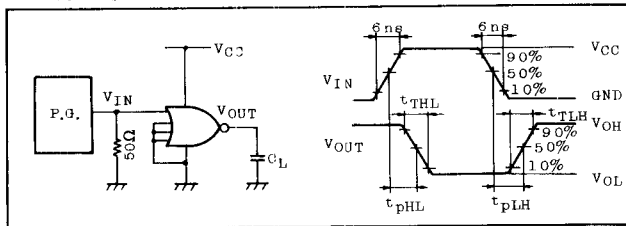


ICC(opr) TEST CIRCUIT




TC74HC4002P


I_{OH} CHARACTERISTICS

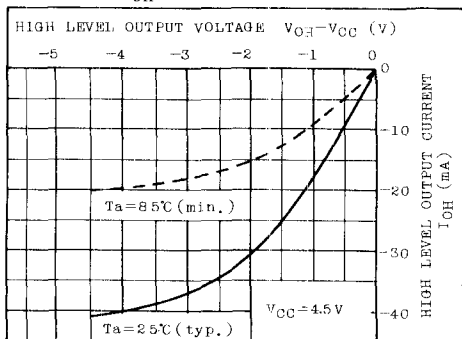


I_{OL} CHARACTERISTICS

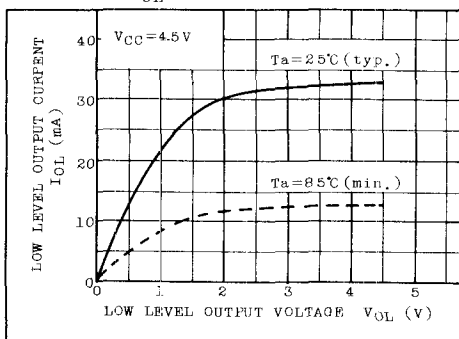


$V_{IN} - V_{OUT}$ CHARACTERISTICS (MIN., MAX.)

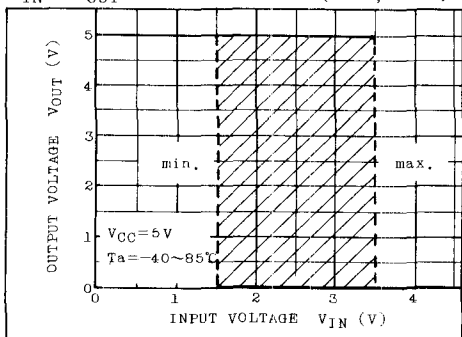


$V_{IN} - V_{OUT}$ CHARACTERISTICS (TYP.)

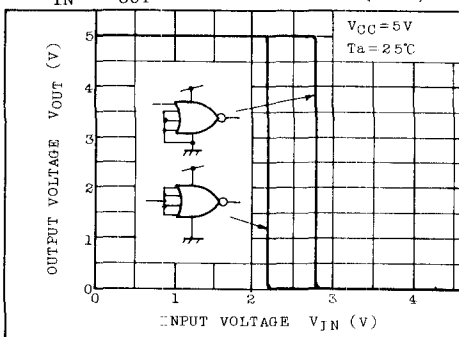


$t_{TLH}, t_{THL} - C_L$ CHARACTERISTICS (TYP.)

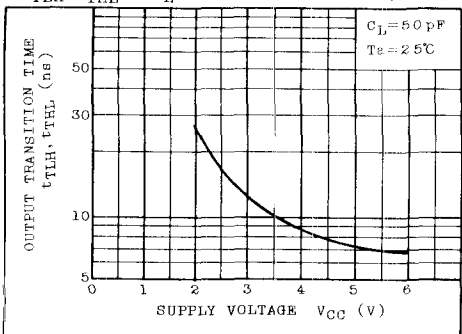

$t_{PLH}, t_{PHL} - C_L$ CHARACTERISTICS (TYP.)

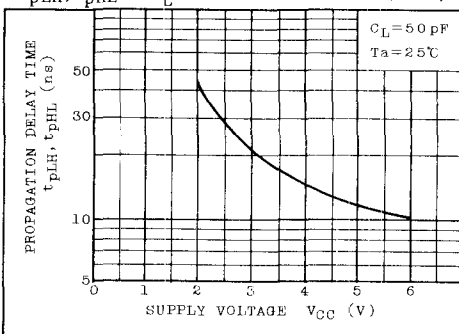

$t_{TLH}, t_{THL} - C_L$ CHARACTERISTICS (TYP.)

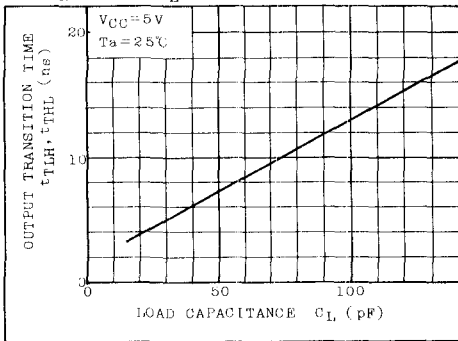

$t_{PLH}, t_{PHL} - C_L$ CHARACTERISTICS (TYP.)

