

# Amphenol MIL-DTL-38999, Series III, TV



**New  
Featured**



**Other New 38999**

Dualok™  
see page 55

HD38999  
see page 46



## TABLE OF CONTENTS

### Combined MIL-DTL-38999 Series I, II, III

|                                                             |        |
|-------------------------------------------------------------|--------|
| • Shell Size & Insert Arrangements Availability . . . . .   | 6-9    |
| • Insert Arrangement Drawings . . . . .                     | 10-17  |
| • Contact - Ratings, Service Ratings, Finish Data . . . . . | 18, 19 |
| • Seal Plugs . . . . .                                      | 18     |

### MIL-DTL-38999, Series III TV

|                                                     |        |
|-----------------------------------------------------|--------|
| • Performance, Options . . . . .                    | 21, 22 |
| • Weight Comparison (Composite vs. Metal) . . . . . | 23     |
| • Test Data . . . . .                               | 24     |
| • How to Order (Commercial & Military) . . . . .    | 25-27  |
| • How to Order (Boeing BACC63) . . . . .            | 28     |

### Shell Styles:

|                                                                                                                            |        |
|----------------------------------------------------------------------------------------------------------------------------|--------|
| • Crimp Wall Mounting Receptacle TVP00R (D38999/20) /CTVP00R (D38999/20)                                                   | 29     |
| • Crimp Box Mounting Receptacle TVP02R / CTVP02R . . . . .                                                                 | 30     |
| • Crimp Straight Plug TV06R (D38999/26) / CTV06R (D38999/26) . . . . .                                                     | 31     |
| • Crimp CLUTCH-LOK™ Straight Plug for High Vibration TV26/MTV26 . . . . .                                                  | 32     |
| • Crimp Jam Nut Receptacle TV07R (D38999/24) / CTV07R (D38999/24) . . . . .                                                | 33     |
| • Crimp Line Receptacle TV01R / CTV01R . . . . .                                                                           | 34     |
| • Crimp Flange Mounting Plug TV09R . . . . .                                                                               | 35     |
| • Hermetic Box Mounting Receptacle TVPS02Y (D38999/21) . . . . .                                                           | 36     |
| • Hermetic Jam Nut Receptacle TVS07Y (D38999/23) . . . . .                                                                 | 37     |
| • Hermetic Solder Mounting Receptacle TVSIY (D38999/25),<br>Hermetic Weld Mounting Receptacle TVSHIY (D38999/27) . . . . . | 38     |
| • Breakaway Fail-Safe Lanyard Release Plug<br>D38999/29 & /30 (88-5565 / 91-5565) . . . . .                                | 39, 40 |
| • Breakaway Fail-Safe How to Order (Military/Commercial) . . . . .                                                         | 41, 42 |
| • Breakaway MIL-STD-1760 Lanyard Release Plug D38999/31 . . . . .                                                          | 43     |
| • Breakaway MIL-STD-1760 How to Order (Military) . . . . .                                                                 | 44     |
| • Breakaway Hybrid, Low Profile Lanyard Release Plug . . . . .                                                             | 45     |
| • Stores Management Type II, Rail Launch (MIL-STD-1760) . . . . .                                                          | 45     |



## MIL-DTL-38999 Series III Typical Markets:

- Military & Commercial Aviation
- Military Vehicles
- Missiles & Ordnance
- C4ISR
- Space Applications

**Amphenol**  
Aerospace

# MIL-DTL-38999, Series III TV Performance



## Tri-Start™ MIL-DTL-38999 Series III with Metal Shells - Aluminum, Stainless Steel, Class K Firewall

Amphenol® Tri-Start MIL-DTL-38999\* Series III Connectors offer the highest performance capabilities for both general duty and severe environment applications. Meeting or exceeding MIL-DTL-38999 Series III requirements, the Tri-Start connector with standard metal shells (aluminum or stainless steel with several finish options) offers these features:

- **EMI Shielding** - solid metal-to-metal coupling, grounding fingers, electroless nickel plating, and thicker wall sections provide superior EMI shielding capability of 65dB minimum at 10 GHz
- **Contact Protection** - recessed pins in this 100% scoop-proof connector minimize potential contact damage
- **Moisture Resistance** - improved interfacial seal design helps prevent electrolytic erosion of contacts
- **Corrosion Resistance** - shells of stainless steel or cadmium over nickel plating withstand a 500 hour salt spray exposure
- **Vibration/Shock** - operates under severe high temperature vibration, through 200°C
- **Firewall Capability** - available in a stainless steel shell, class RK, RS
- **Lockwiring Eliminated** - unique, self-locking, quick coupling connector eliminates lockwiring
- **Quick Coupling** - completely mates and self-locks in a 360° turn of the coupling nut
- **Inventory Support Commonality** - uses standard MIL-DTL-38999 contacts, application tools, insert arrangements
- **Electrostatic Discharge Protection (ESD)** - protection for sensitive circuitry without diodes, varistors, etc., with the use of the Faraday Cage principle which shunts high voltage, high current discharge events (see page 331)
- **Hermetic**- air leakage limited to  $1 \times 10^{-7}$  cm<sup>3</sup> per second optional
- **Qualified Specifications** - Stainless Steel qualified to BACC63DB and BACC63DC specifications

### Optional Shell Geometries

Amphenol offers a number of different shell configurations to fit your needs.

- Deep Reach Shells - For increased panel thickness
- Stand-off Flange Shells - For attachments to Printed Circuit Boards.
- Connector with Integral Strain Reliefs

\* MIL-DTL-38999 Series III supersedes MIL-C-38999 Series III.

#### Applicable Patents:

Tri-Start™ Connector Patent 4,109,990.

Composite Connector Patents:

4,268,103; 4,648,670; 4,682,832; 4,703,987.

Clutch-Lok® Patent 6,152,753.



## Series III

Composite Tri-Start,  
Qualified to MIL-DTL-38999, Rev. J

MIL-Qualified to MIL-DTL-38999, Rev. K, the Amphenol® Composite Tri-Start Connector offers a lightweight, corrosion resistant connector with the same high performance features as its metal counterpart. The Composite Tri-Start Connector also includes the following features:

- **Lightweight** - 17% – 70% weight savings (17–40% weight savings vs. Aluminum) (60–70% weight savings vs. Stainless steel) See Composite weight comparison chart on page 23.
- **Corrosion Resistance** - available in standard MIL-DTL-38999 olive drab cadmium (-65°C to 175°C) and electroless nickel plating (-65°C to 200°C), both withstanding 2000 hours of salt spray exposure. The base material is able to withstand an indefinite exposure to salt spray.
- **Durability** - 1500 couplings minimum (in reference to connector couplings, not contacts)
- **Extended Life Contact** - Mil-approved plating process which provides 1500 couplings minimum
- Qualified to BACC63CT and BACC63CU specifications



## CLUTCH-LOK™ MIL-DTL-38999 Series III High Vibration Connector

The Tri-Start option CLUTCH-LOK offers all advantages of stainless steel/Class K firewall for MIL-DTL-38999 Series III connectors, plus a unique clutch design that actually tightens itself under vibration. Features include:

- High degree of differential torque
  - No settling back to the next ratchet tooth
  - Completely intermateable with all existing MIL-DTL-38999 Series III connectors
  - Offers advantage in inaccessible, hard to reach areas where mating torque is difficult to apply and complete coupling is not verifiable by inspection
- See page 32 for description,  
25 – 27 for ordering.

## 38999

|             |
|-------------|
| III         |
| HD          |
| Dualok      |
| II          |
| I           |
| SJT         |
| Accessories |
| Aquacon     |
| Herm/Seal   |
| PCB         |

## HIGH SPEED

|              |
|--------------|
| Fiber Optics |
| Contacts     |
| Connectors   |
| Cables       |

## EMI Filter Transient

## 26482 Matrix 2

## 83723 III Matrix | Pyle

## 26500 Pyle

## 5015 Crimp Rear Release Matrix

## 22992 Class I

## Back- Shells

## Options Others

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH SPEED

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle


5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

## Series III, TV Tri-Start Connectors, offer more versatility & options than any other interconnection family!

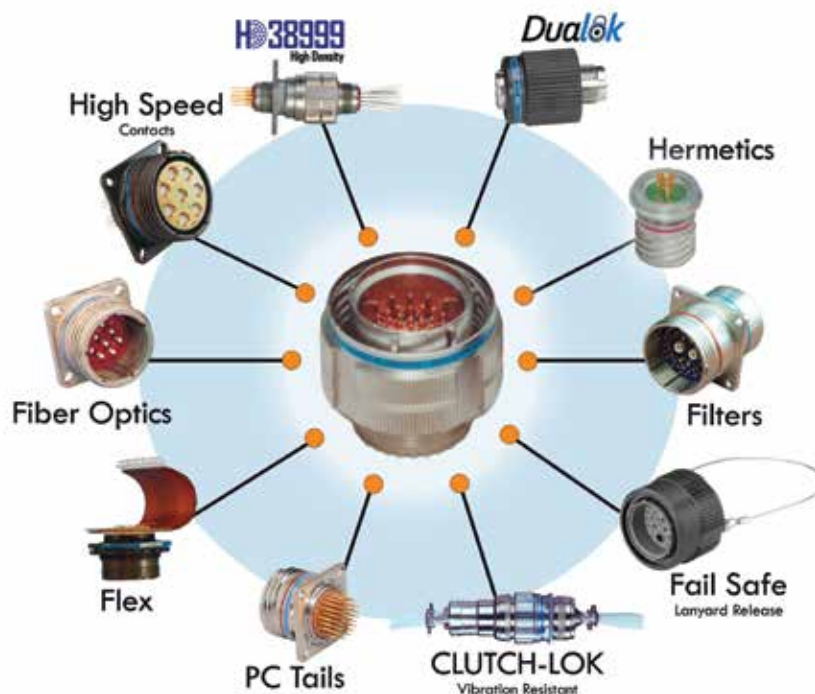

High reliability and increased versatility best describe Amphenol MIL-DTL-38999, Series III circular connectors. Originally designed for the harshest of environments and most demanding of applications, Amphenol MIL-DTL-38999 Series III, Tri-Start connectors continue to evolve in pace with the needs of an ever-changing market.

Amphenol Tri-Start connectors can be configured with a number of application specific technologies like High Density HD38999, Dualok, Filters, Hermetics, PC Tails, Fiber Optics, Flex, CLUTCH-LOK, Fail Safe, and contacts. Flexibility aids in design optimization through the combination of different technologies within a common, time-tested, harsh environment connector body.

For more information about options, please call 800-678-0141 or visit [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com).

## Performance

### Designed for Performance

Numerous advantages in performance capability are designed into the Amphenol Tri-Start Connector. A positive metal to metal coupling design, grounding fingers, and electroless nickel plating provide superior EMI shielding capability of 65 dB minimum at 10 GHz.

Acme threads provide coupling durability. Thicker wall sections and a greater coupling surface area improve strength and shock resistance. Blunting of the thread on both the coupling nut and receptacle eliminates cross coupling. The connector quickly mates and self locks in a 360° turn of the coupling nut.

Elongated mounting holes permit the Tri-Start Connector to intermount with various existing MIL-Spec box or wall mount receptacles, giving it a design replacement advantage.

Shells of stainless steel or cadmium over nickel plating prevent severe corrosion. Resistance is tested through exposure to a 500 hour salt spray. Composite versions provide protection from salt spray exposure for 2000 hours. Other finish options are available; see how to order Tri-Start metal and Tri-Start Composite.

Recessed pins minimize potential contact damage in this 100% scoop-proof connector. In a blind mating application, mating shells cannot "scoop" the pins and cause a shorting or bending of contacts.

The design of the Amphenol Tri-Start interfacial seal meets the MIL-DTL-38999 Series III requirements for electrolytic erosion resistance.

A rigid dielectric insert with excellent electrical characteristics provides durable protection to the contacts. The socket contacts are probe proof, and all contacts are rear removable. They are plated in the standard 50 micro inches minimum gold, with 100 micro inches as an option, and are available in standard Tri-Start insert arrangements and special Pyle® insert arrangements in sizes 10 power, 12, 16, 20 and 22D contacts. Special insert patterns are also available with larger contacts in sizes 4 and 0.

# MIL-DTL-38999, Series III TV

## Weight Comparisons (Composite vs. Metal)

Depending on the shell style, shell size and contact count, weight savings can range from 17% to 40% compared to standard aluminum product.

**Tri-Start Weight in Ounces** (includes contacts)

## Weight

|       | Wall Mount Receptacle (00 • Military D38999/20) |        |          |        |           |        | Jam Nut Receptacle (07) • Military D38999/24 |        |          |        |           |        | Plug (06) • Military D38999/26 |        |          |        |           |        |
|-------|-------------------------------------------------|--------|----------|--------|-----------|--------|----------------------------------------------|--------|----------|--------|-----------|--------|--------------------------------|--------|----------|--------|-----------|--------|
|       | Stainless Steel                                 |        | Aluminum |        | Composite |        | Stainless                                    |        | Aluminum |        | Composite |        | Stainless Steel                |        | Aluminum |        | Composite |        |
|       | Pin                                             | Socket | Pin      | Socket | Pin       | Socket | Pin                                          | Socket | Pin      | Socket | Pin       | Socket | Pin                            | Socket | Pin      | Socket | Pin       | Socket |
| 9-35  | .7216                                           | .7840  | .3248    | .3777  | .2588     | .3121  | 1.1472                                       | 1.2096 | .4416    | .5040  | .3489     | .4413  | 1.0736                         | 1.1360 | .4236    | .4625  | .2606     | .2994  |
| 9-98  | .7216                                           | .7776  | .2496    | .3056  | .1664     | .2224  | 1.1472                                       | 1.2032 | .4416    | .4976  | .3744     | .4640  | 1.0736                         | 1.1296 | .3968    | .4624  | .2991     | .2337  |
| 11-35 | .9488                                           | 1.0800 | .3632    | .4960  | .2753     | .4081  | 1.4304                                       | 1.5632 | .5936    | .7264  | .4679     | .6007  | 1.2480                         | 1.3808 | .5312    | .6389  | .3450     | .4582  |
| 11-98 | .9488                                           | 1.0620 | .3632    | .4768  | .2753     | .3889  | 1.4304                                       | 1.5440 | .5936    | .7072  | .4679     | .5815  | 1.2480                         | 1.3616 | .5330    | .6283  | .3468     | .4457  |
| 13-8  | 1.2096                                          | 1.3888 | .4800    | .6592  | .3696     | .5488  | 1.9104                                       | 2.0896 | .7664    | .9456  | .6560     | .8352  | 1.8048                         | 1.9840 | .7936    | .9728  | .5237     | .5952  |
| 13-35 | 1.2160                                          | 1.4320 | .4864    | .7024  | .3762     | .5922  | 1.9168                                       | 2.1328 | .7728    | .9888  | .6136     | .8296  | 1.8112                         | 2.0272 | .8000    | .8472  | .5301     | .6531  |
| 13-98 | 1.2160                                          | 1.4016 | .4864    | .6720  | .3762     | .5618  | 1.9168                                       | 2.1024 | .7728    | .9584  | .6136     | .7992  | 1.8112                         | 1.9968 | .7978    | .9856  | .5244     | .7157  |
| 15-5  | 1.5312                                          | 1.7904 | .6352    | .8944  | .5027     | .7619  | 2.3792                                       | 2.6384 | .9728    | 1.2320 | .7749     | 1.0341 | 2.2704                         | 2.5456 | .9632    | 1.1719 | .6450     | .8467  |
| 15-18 | 1.5456                                          | 1.8416 | .7760    | .9456  | .6432     | .8128  | 2.3936                                       | 2.6896 | .9872    | 1.2832 | .8544     | 1.1504 | 2.2848                         | 2.5808 | .9776    | 1.2736 | .6594     | .8208  |
| 15-35 | 1.5424                                          | 1.8768 | .6464    | .9808  | .5139     | .8483  | 2.3904                                       | 2.7344 | .9840    | 1.3280 | .7861     | 1.1301 | 2.2816                         | 2.6256 | 1.2179   | 1.3184 | .8961     | 1.0002 |
| 17-6  | 2.1488                                          | 2.5904 | .9360    | 1.3776 | .7812     | 1.2228 | 2.9152                                       | 3.3568 | 1.2336   | 1.6752 | .9940     | 1.4356 | 2.5008                         | 3.1024 | 1.1408   | 1.7424 | .8160     | 1.4176 |
| 17-26 | 2.1344                                          | 2.5600 | .9216    | 1.3472 | .7668     | 1.1924 | 2.9008                                       | 3.3264 | 1.2192   | 1.6448 | .9796     | 1.4052 | 2.4864                         | 2.9120 | 1.1264   | 1.3343 | .8017     | .8062  |
| 17-35 | 2.1360                                          | 2.6640 | .9232    | 1.4512 | .7684     | 1.2964 | 2.9024                                       | 3.4304 | 1.2208   | 1.7488 | .9812     | 1.5092 | 2.4880                         | 3.0160 | 1.1280   | 1.5497 | .8033     | 1.2144 |
| 19-11 | 2.2592                                          | 2.6656 | .9696    | 1.4528 | .7925     | 1.2757 | 3.4352                                       | 3.9184 | 1.4720   | 1.9552 | 1.2033    | 1.6865 | 2.9808                         | 3.4640 | 1.3472   | 1.8304 | .9632     | 1.4464 |
| 19-32 | 2.1888                                          | 2.7264 | .9760    | 1.5136 | .7989     | 1.3365 | 3.4416                                       | 3.9792 | 1.4784   | 2.0160 | 1.2097    | 1.7473 | 2.9872                         | 3.5248 | 1.3536   | 1.8912 | .9696     | 1.5072 |
| 19-35 | 2.1920                                          | 2.8432 | .9792    | 1.6304 | .8021     | 1.4533 | 3.4448                                       | 4.0960 | 1.4816   | 2.1328 | 1.2129    | 1.8641 | 2.9904                         | 3.6416 | 1.3568   | 2.0080 | .9728     | 1.6240 |
| 21-11 | 2.7456                                          | 3.4640 | 1.3088   | 2.0272 | 1.1088    | 1.8272 | 3.9712                                       | 4.6896 | 1.8128   | 2.5312 | 1.6128    | 2.3312 | 3.4448                         | 4.1632 | 1.7344   | 2.5312 | 1.3039    | 1.8710 |
| 21-16 | 2.6784                                          | 3.3168 | 1.2416   | 1.8800 | 1.0422    | 1.6806 | 3.9040                                       | 4.5424 | 1.7456   | 2.3840 | 1.4505    | 2.0889 | 3.3776                         | 4.0160 | 1.6672   | 2.3168 | 1.2352    | 1.8736 |
| 21-35 | 2.6672                                          | 3.4992 | 1.2304   | 2.0624 | 1.0310    | 1.8630 | 3.8928                                       | 4.7248 | 1.7344   | 2.5664 | 1.4393    | 2.2713 | 3.3664                         | 4.1984 | 1.6560   | 2.2309 | 1.2255    | 1.8003 |
| 21-41 | 2.6768                                          | 3.3600 | 1.2400   | 1.9232 | 1.0406    | 1.7238 | 3.9024                                       | 4.5856 | 1.7440   | 2.4272 | 1.4489    | 2.1321 | 3.3760                         | 3.5792 | 1.6656   | 1.8688 | 1.2336    | 1.4368 |
| 23-21 | 3.0352                                          | 3.8624 | 1.4496   | 2.2768 | 1.2279    | 2.0551 | 4.2368                                       | 5.0640 | 1.9440   | 2.7712 | 1.6368    | 2.4640 | 3.7920                         | 4.6192 | 1.9216   | 2.7488 | 1.4637    | 2.2896 |
| 23-35 | 3.0240                                          | 4.0448 | 1.4384   | 2.4592 | 1.2167    | 2.2375 | 4.2256                                       | 5.2464 | 1.9328   | 2.9536 | 1.6256    | 2.6464 | 3.7808                         | 4.8016 | 1.9104   | 2.6087 | 1.4525    | 2.1507 |
| 23-53 | 2.8992                                          | 3.9072 | 1.4560   | 2.4816 | 1.2343    | 2.2599 | 4.2432                                       | 5.1088 | 1.9504   | 2.8160 | 1.6432    | 2.5088 | 3.7984                         | 4.6640 | 1.9280   | 2.7936 | 1.4672    | 2.2384 |
| 25-4  | 3.4512                                          | 4.4800 | 1.7312   | 2.8816 | 1.4864    | 2.1904 | 4.8048                                       | 5.8272 | 2.2016   | 3.2480 | 1.9568    | 2.8720 | 4.2224                         | 5.2496 | 2.2128   | 3.2560 | 1.7133    | 2.4163 |
| 25-19 | 3.5312                                          | 4.7264 | 1.8112   | 3.0064 | 1.5664    | 2.7616 | 4.8848                                       | 6.0816 | 2.2816   | 3.4784 | 2.0368    | 3.2336 | 4.3024                         | 5.4992 | 2.2928   | 3.4896 | 1.7933    | 2.7058 |
| 25-20 | 3.8190                                          | 4.7150 | 2.0173   | 3.1125 | 1.7733    | 2.8512 | 5.1430                                       | 6.0380 | 2.4877   | 3.5421 | 2.1872    | 3.2416 | 4.4350                         | 5.3300 | 2.2580   | 3.0182 | 1.8288    | 2.8928 |
| 25-35 | 3.4416                                          | 4.6656 | 1.7216   | 2.9456 | 1.4776    | 2.7016 | 4.7952                                       | 6.0192 | 2.1920   | 3.4160 | 1.8915    | 3.1155 | 4.2128                         | 5.4368 | 2.2032   | 3.4272 | 1.7037    | 2.9277 |
| 25-61 | 3.4304                                          | 4.4848 | 1.7282   | 2.7648 | 1.4841    | 2.5208 | 4.7840                                       | 5.8384 | 2.1808   | 3.2352 | 1.8803    | 2.9347 | 4.2016                         | 5.2560 | 2.1920   | 3.2464 | 1.6912    | 2.7456 |

All weight measurements are for reference only.

**38999**

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

**HIGH SPEED**

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix I Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH SPEED

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle


5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

### TRI-START, SERIES III TYPICAL SHIELDING EFFECTIVENESS TEST DATA EMI/EMP SHIELDING EFFECTIVENESS dB TESTING BY TRIAXIAL METHOD

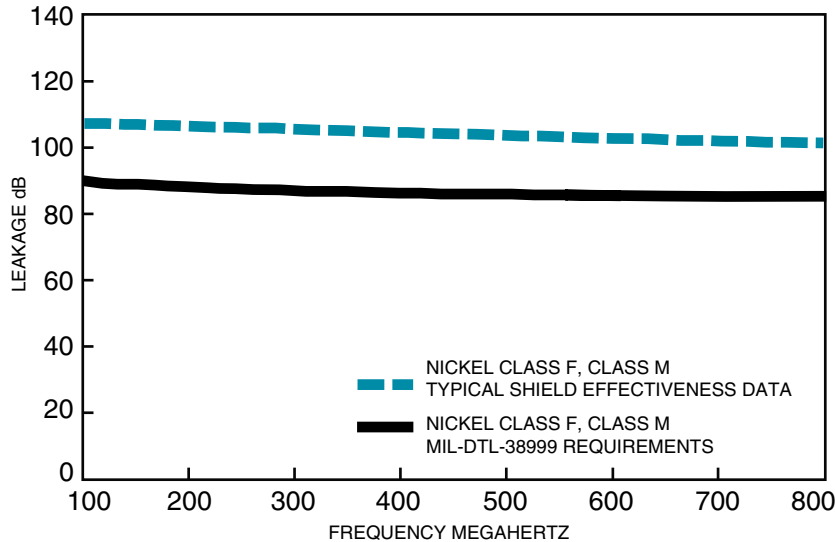


**Amphenol® Tri-Start connectors provide EMI/EMP shielding capability which exceeds MIL-DTL-38999 Series III requirements.**


The TV and CTV Series III connector with standard solid metal-to-metal coupling, EMI grounding fingers and conductive finishes have proven to be the ultimate in EMI/EMP shielding effectiveness. The charts illustrate shielding effectiveness data which is typical of Tri-Start connectors tested with the nickel finish (Class F-metal, Class M-composite) over a wide frequency range.

The vibration capability of the Tri-Start Series is shown in the chart below. This illustrates the most severe vibration envelope of *any* qualified connector available today. These capabilities along with a +200°C, -65°C temperature rating and superior moisture sealing protection provide the user with a connector that can withstand the most rigorous application.

### TRI-START, SERIES III TYPICAL SHIELDING EFFECTIVENESS TEST DATA EMI/EMP SHIELDING EFFECTIVENESS dB TESTING BY MODE STIRRING METHOD

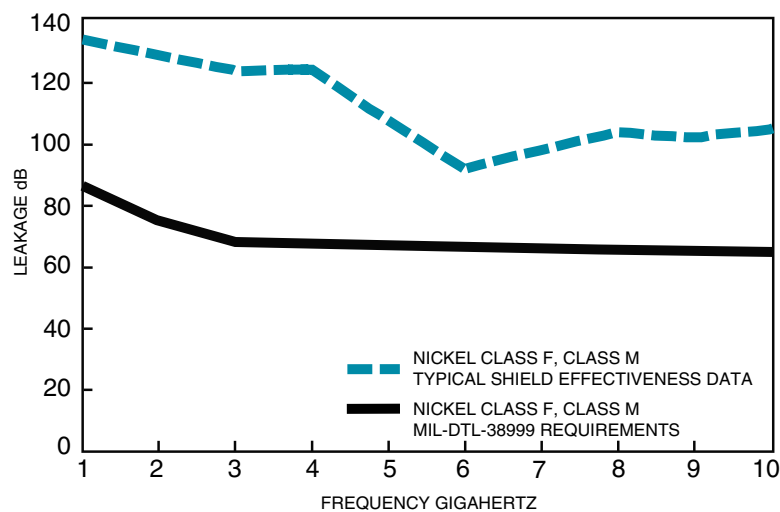

### TRI-START VIBRATION CRITERIA

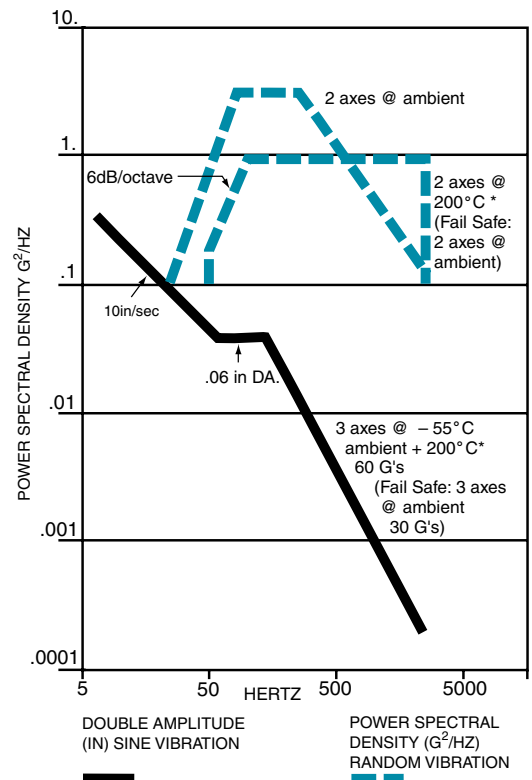

\* Dependant on shell finish

Test data beyond 2GHz is subject to equipment variation.

NOTE: For test data information on the new Clutch-Lok Tri-Start, high vibration connectors, consult Amphenol Aerospace.

# MIL-DTL-38999, Series III TV

## How to Order (Military and Commercial)

### Easy Steps to build a part number... Tri-Start Series III TV

| 1. Commercial | 2. Shell Style | 3. Service Class | 4. Shell Size— Insert Arrangement | 5. Contact Type | 6. Alternate Keying Position | 7. Special Variations |
|---------------|----------------|------------------|-----------------------------------|-----------------|------------------------------|-----------------------|
| TVPS          | 00             | RF               | 9-35                              | P               | B                            | (XXX)                 |
| Military      | Shell Style    | Service Class    | Shell Size— Insert Arrangement    | Contact Type    | Alternate Keying Position    |                       |
| D38999/       | 20             | J                | G35                               | P               | N                            |                       |

#### Step 1. Select a Connector Type

Do you need a Mil-Spec marked connector?

##### Military-MIS-Spec Market

|               |                                             |
|---------------|---------------------------------------------|
| <b>D38999</b> | Military MIL-DTL-38999 Series III Connector |
|---------------|---------------------------------------------|

If you don't need Mil-Spec Marked Connector select from the choices below.

Next question to help you decide.  
What Shell Material & Temperature rating do you need?

| Aluminum 175°C                          |                                                                                                                    |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>TV</b>                               | Tri-Start 175°C                                                                                                    |
| <b>TVP</b>                              | Panel mounted receptacle 175°C                                                                                     |
| Aluminum, Aluminum Bronze & Steel 200°C |                                                                                                                    |
| <b>TVS</b>                              | 200°C rated                                                                                                        |
| <b>TVPS</b>                             | Panel mounted, 200°C rated receptacle                                                                              |
| Composite 175°C                         |                                                                                                                    |
| <b>CTV</b>                              | Composite 175°C                                                                                                    |
| <b>CTVP</b>                             | Panel mounted composite receptacle 175°C                                                                           |
| Composite 200°C                         |                                                                                                                    |
| <b>CTVS</b>                             | 200°C rated, composite                                                                                             |
| <b>CTVPS</b>                            | Composite Panel mounted, 200° rated receptacle                                                                     |
| Steel 200°C                             |                                                                                                                    |
| <b>MTV</b>                              | CLUTCH-LOK connector with "MS" stamping (Note: remove dashes in how to order part number when ordering CLUTCH-LOK) |

#### Step 2. Select a Shell Style

| COMMERCIAL             |         |     |      | MILITARY   |                 |                           | Designates                                              |
|------------------------|---------|-----|------|------------|-----------------|---------------------------|---------------------------------------------------------|
| TVP, TVPS, CTVP, CTVPS | TV, CTV | TVS | CTVS | CLUTCH-LOK | D38999 Military | D38999 Military Composite |                                                         |
| 00                     |         |     |      |            | 20              | 20                        | Wall Mount Receptacle                                   |
| 02                     |         |     |      |            |                 |                           | Box Mount Receptacle                                    |
|                        |         |     |      |            | 21              |                           | Box Mount Receptacle Hermetic                           |
|                        | 01      | 01  | 01   |            |                 |                           | Line Receptacle                                         |
|                        | 06      | 06  | 06   |            | 26              | 26                        | Straight Plug                                           |
|                        | 07      | 07  | 07   |            | 24              | 24                        | Jam Nut Receptacle                                      |
|                        | 09      | 09  |      |            |                 |                           | Flange Mounted Plug                                     |
|                        |         |     |      |            | 23              |                           | Jam Nut Receptacle Hermetic                             |
|                        |         | I   |      |            | 25              |                           | Solder Mount Receptacle Hermetic                        |
|                        |         | HI  |      |            | 27              |                           | Weld Mounted Receptacle, (Hermetic) Only                |
|                        | 56      | 56  | 56   |            |                 |                           | Straight plug with Dualok                               |
|                        |         |     |      | 26         |                 | 26                        | CLUTCH-LOK high vibration straight plug (Class RK only) |
|                        |         |     |      |            | 29              |                           | Lanyard release plug with pin contacts                  |
|                        |         |     |      |            | 30              |                           | Lanyard release plug with socket contacts               |
|                        |         |     |      |            | 31              |                           | Lanyard release plug for MIL-STD-1760 with pin contacts |
|                        |         |     |      |            | 32              |                           | Plug protection cap                                     |
|                        |         |     |      |            | 33              |                           | Receptacle protection cap                               |

Wall Mount Receptacle (00, 20)



Line Receptacle (01)



Box Mount Receptacle (02, 21)



Straight Plug (06)




Jam Nut Receptacle (07, 24)



Flange Mounting Plug (09)



Deep Reach Receptacle Consult Amphenol Aerospace



Solder Mount Hermetic Receptacle (I, 25)



Lanyard Release Plug (29, 30, 31)

**38999**

|             |
|-------------|
| III         |
| HD          |
| Dualok      |
| II          |
| I           |
| SJT         |
| Accessories |
| Aquacon     |
| Herm/Seal   |
| PCB         |

**HIGH SPEED**

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear Release Matrix

22992  
Class I

Back-  
Shells

Options  
Others

38999

#### Step 3. Select a Service Class

| 1.             | 2.          | 3.            | 4.                      | 5.           | 6.                 | 7.                 |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| Connector Type | Shell Style | Service Class | Shell Size-Insert Arrg. | Contact Type | Alternate Position | Special Variations |
|                |             | <b>RX</b>     |                         |              |                    |                    |

| TV        | TVP       | CTV           | CTVP          | CTVS, CTVPS   | TVS       | TVPS      | CLUTCH-LOK | Military               | Finish                          | ROHS | Description                                                                                                                                                                                |
|-----------|-----------|---------------|---------------|---------------|-----------|-----------|------------|------------------------|---------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           |           |               |               |               | RB        | RB        |            |                        | Aluminum Bronze                 | TBD  | Corrosion resistant aluminum bronze for marine & other high corrosion applications, 200°C.                                                                                                 |
|           |           |               |               |               |           |           |            | C                      | Anodic Coating                  | ■    | Non-conductive, anodic coated aluminum, 500 hour salt spray, 200°C.                                                                                                                        |
| RX        | RX        |               |               |               | RX        | RX        |            |                        |                                 | TBD  | Consult Amphenol Aerospace for details, options and availability of non-cadmium or ROHS Compliant Finishes.                                                                                |
|           |           |               |               | RF-Composite  | RF-Metal  | RF-Metal  |            | F-Metal<br>M-Composite | Electroless Nickel              | ■    | Electroless nickel plated aluminum (composite) optimum EMI shielding effectiveness -65dB @ 10GHz specification min., 48 hour salt spray, 200°C (Composite-2000 hours dynamic salt spray).  |
|           |           |               |               | RGF-Composite | RGF-Metal | RGF-Metal |            |                        | Electroless Nickel              | ■    | Electroless nickel plated ground plane aluminum (composite), 200°C                                                                                                                         |
|           |           |               |               |               |           |           |            | G                      | Electroless Nickel              | ■    | Space grade, electroless nickel, 48 hour salt spray, 200°C                                                                                                                                 |
| RGW-Metal | RGW-Metal | RGW-Composite | RGW-Composite |               |           |           |            |                        | Olive Drab Cadmium              |      | Olive drab cadmium plated ground plane aluminum (composite), 175°C                                                                                                                         |
|           |           |               |               |               | RK**      | RK**      | RK**       | K                      | Passivated Stainless Steel      | ■    | Corrosion resistant stainless steel, fire-wall capability, plus 500 hour salt spray resistance, EMI -45 dB @ 10 GHz specification min., 200°C                                              |
|           |           |               |               |               | RKN       | RKN       |            |                        | Passivated Stainless Steel      | ■    | Corrosion resistant stainless steel, non-firewall capability, plus 500 hour salt spray resistance, EMI -45 dB @ 10 GHz specification min., 200°C                                           |
|           |           |               |               |               | RL        | RL        |            | L                      | Stainless Steel w/ Nickel Plate | ■    | Corrosion resistant steel, electro deposited nickel, 500 hour salt spray, 200°C, non firewall, EMI shielding -65dB @ 10GHz specification min.                                              |
| RW-Metal  | RW-Metal  | RW-Composite  | RW-Composite  |               |           |           |            | W-Metal<br>J-Composite | Olive Drab Cadmium              |      | Corrosion resistant olive drab cadmium plate aluminum (composite), 500 hour salt spray, EMI Shielding -50 dB@10 GHz specification min., 175°C (Composite - 2000 hours dynamic salt spray). |
|           |           |               |               |               | Y         | Y         |            | Y                      | Stainless Steel                 | ■    | Hermetic seal, passivated stainless steel, 200°C                                                                                                                                           |
|           |           |               |               |               | RS*       | RS*       | RS*        | S                      | Stainless Steel w/ Nickel Plate | ■    | (Non-hermetic connectors), Nickel plated, corrosion resistant steel, firewall capability, 500 hour salt spray, 200°, EMI shielding -65dB @ 10GHz specification min.                        |
|           |           |               |               |               | YN        | YN        |            | N                      | Stainless Steel w/ Nickel Plate | ■    | (Hermetic connectors), Nickel plated corrosion resistant steel, 200°C                                                                                                                      |
| DT        | DT        |               |               |               |           |           |            | T                      | Durmalon plated                 | ■    | Nickel-PTFE alternative to Cadmium. Corrosion resistant, 500 hour salt spray, EMI -50dB at 10GHz specification min., 175°C                                                                 |
| DZ        | DZ        |               |               |               |           |           |            | Z                      | Zinc-Nickel Plated              | ■    | Zinc-Nickel Alternative to Cadmium, corrosion resistant, 500 hour salt spray, Conductive, -65°C to +175°C, EMI Shielding -50 dB @ 10 GHz specification min.                                |

#### Quadrax or Differential Twinax:

The incorporation of Quadrax or Differential Twinax contacts requires a modified connector to accommodate keyed contacts.

\* D38999/26KJ20PN, is a series III stainless steel plug with twin axial and coaxial contacts that may not meet the firewall requirement of the specification. D38999/26KJ61HN, is a series III stainless steel plug with high durability contacts. However, the connector will be limited to 500 cycles of durability. Insert arrangements using multi-axial (i.e. coax, twinax, triax shielded) contacts should not be used in firewall applications.

#### Step 4. Select a Shell Size & Insert Arrangement see pages 6-9

| Double Start Threads | Triple Start Threads |   |    |    |    |    |    |    |    |    | Mil Shell Size      |
|----------------------|----------------------|---|----|----|----|----|----|----|----|----|---------------------|
|                      | A                    | B | C  | D  | E  | F  | G  | H  | J  |    |                     |
| 7                    | 7H                   | 9 | 11 | 13 | 15 | 17 | 19 | 21 | 23 | 25 | Amphenol Shell size |

| 1.             | 2.          | 3.            | 4.                      | 5.           | 6.                 | 7.                 |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| Connector Type | Shell Style | Service Class | Shell Size-Insert Arrg. | Contact Type | Alternate Position | Special Variations |
|                |             |               | 23-2                    |              |                    |                    |

Shell Size & Insert Arrangement are on pages 6-9. First number represents Shell Size, second number is the Insert Arrangement.

\* Size 7 and 7H are Double Start Threads only

### Step 5. Select a Contact Type

|          | Designates                                                                                           |
|----------|------------------------------------------------------------------------------------------------------|
| <b>P</b> | Pin Contacts                                                                                         |
| <b>S</b> | Socket Contacts                                                                                      |
| <b>H</b> | 1500 Cycle Pin Contacts                                                                              |
| <b>J</b> | 1500 Cycle Socket Contacts                                                                           |
| <b>A</b> | Same as "P" except supplied less pin Contacts                                                        |
| <b>B</b> | Same as "S" except supplied less socket contacts ( A & B designate nonstandard contact applications) |
| <b>X</b> | Eyelet contacts, hermetics only                                                                      |

### Step 6. Select an Alternate Keying Position

#### Key/Keyway Position

| Shell Size      | Key & Keyway Arrangement Identification Letter | AR° or AP° BSC                        | BR° or BP° BSC                         | CR° or CP° BSC                         | DR° or DP° BSC                         |
|-----------------|------------------------------------------------|---------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| 7, 7H           | N*<br>A<br>B<br>C<br>D<br>E                    | 120<br>132<br>80<br>140<br>155<br>131 | 240<br>248<br>230<br>275<br>234<br>197 | NA                                     | NA                                     |
| 9               | N*<br>A<br>B<br>C<br>D<br>E                    | 105<br>102<br>80<br>35<br>64<br>91    | 140<br>132<br>118<br>140<br>155<br>131 | 215<br>248<br>230<br>205<br>234<br>197 | 265<br>320<br>312<br>275<br>304<br>240 |
| 11, 13, and 15  | N*<br>A<br>B<br>C<br>D<br>E                    | 95<br>113<br>90<br>53<br>119<br>51    | 141<br>156<br>145<br>156<br>146<br>141 | 208<br>182<br>195<br>220<br>176<br>184 | 236<br>292<br>252<br>255<br>298<br>242 |
| 17 and 19       | N*<br>A<br>B<br>C<br>D<br>E                    | 80<br>135<br>49<br>66<br>62<br>79     | 142<br>170<br>169<br>140<br>145<br>153 | 196<br>200<br>200<br>200<br>180<br>197 | 293<br>310<br>244<br>257<br>280<br>272 |
| 21, 23, and 25  | N*<br>A<br>B<br>C<br>D<br>E                    | 80<br>135<br>49<br>66<br>62<br>79     | 142<br>170<br>169<br>140<br>145<br>153 | 196<br>200<br>200<br>200<br>180<br>197 | 293<br>310<br>244<br>257<br>280<br>272 |
| 25L, 33, and 37 | N*<br>A<br>B<br>C<br>D<br>E                    | 80<br>135<br>49<br>66<br>62<br>79     | 142<br>170<br>169<br>140<br>145<br>153 | 188<br>188<br>188<br>188<br>188<br>188 | 293<br>310<br>244<br>257<br>280<br>272 |



\* An "N" designation is used on D38999 military part number but not on the commercial versions

### Step 7. Special Variations

Consult Amphenol Aerospace for variations.

| 1.             | 2.          | 3.            | 4.                      | 5.           | 6.                 | 7.                 |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| Connector Type | Shell Style | Service Class | Shell Size-Insert Arrg. | Contact Type | Alternate Position | Special Variations |
|                |             |               |                         | P            | B                  |                    |

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The angles for a given connector are the same whether it contains pins or sockets. Master key stays fixed, minor keys rotate. Inserts are not rotated in conjunction with the master key/keyway.

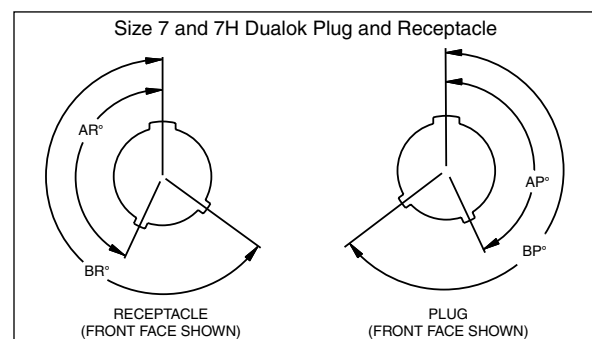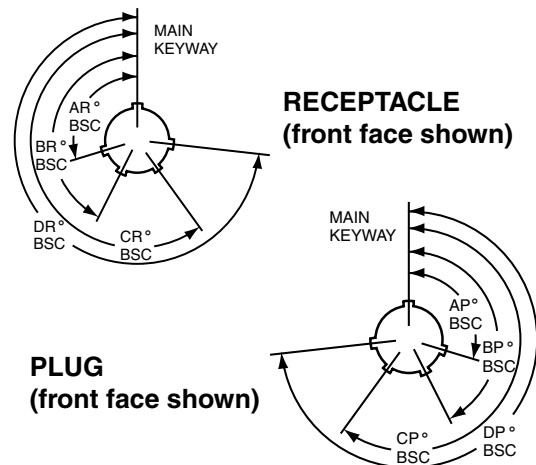

| 1.             | 2.          | 3.            | 4.                      | 5.           | 6.                 | 7.                 |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| Connector Type | Shell Style | Service Class | Shell Size-Insert Arrg. | Contact Type | Alternate Position | Special Variations |
|                |             |               |                         |              |                    | (xxx)              |

**38999**

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

**HIGH SPEED**

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear Release Matrix

22992  
Class I

Back-Shell

Options  
Others

38999

### Easy Steps to build a part number... Boeing BACC63 CT & CU

1. 2. 3. 4. 5. 6. 7. 8.

| Boeing Basic Number | Style | Shell Size | Shell Finish & Contact | Insert Arrangement | Contact Type | Alternate Keying Position | Ordering Option |
|---------------------|-------|------------|------------------------|--------------------|--------------|---------------------------|-----------------|
| BACC63              | CT    | 15         | —                      | 19                 | P            | N                         | H               |

## Composite

**Step 1. Boeing Number BACC63**

**Step 2. Select a Style**

| Designates |                      |
|------------|----------------------|
| CT         | Composite Plug       |
| CU         | Composite Receptacle |

**Step 3. Shell Size 15**

| Designates |                |
|------------|----------------|
| 15         | One Shell Size |

**Step 4. Select a Shell Finish & Contact**

| Designates |                                         |
|------------|-----------------------------------------|
| C          | CT Style Only. Cadmium Plated, Grounded |
| D          | Cadmium Plated, ungrounded              |
| G          | Nickel Plated, Grounded                 |
| —          | Nickel Plated, Ungrounded               |

**Step 5. Insert Arrangements-**  
Consult Amphenol Aerospace for insert arrangements available.

**Step 6. Select a Contact Type**

| Designates |        |
|------------|--------|
| P          | Pin    |
| S          | Socket |

**Step 7. Select an Alternate Keying Position**

| Designates |            |
|------------|------------|
| N          | Normal     |
| A-E        | Alternates |

**Step 8. Ordering Option**

| Designates |                               |
|------------|-------------------------------|
| H          | Without Contacts & Seal Plugs |
| Blank      | With Contacts & Seal Plugs    |

### Easy Steps to build a part number... Boeing BACC63 DB & DC

1. 2. 3. 4. 5. 6. 7. 8.

| Boeing Basic Number | Style | Shell Size | Separator | Insert Arrangement | Contact Type | Alternate Keying Position | Ordering Option |
|---------------------|-------|------------|-----------|--------------------|--------------|---------------------------|-----------------|
| BACC63              | DB    | 15         | —         | 19                 | P            | N                         | H               |
| BACC63              | DC    | 17         | —         | 8                  | P            | N                         | H               |

## Stainless Steel

**Step 1. Boeing Number BACC63**

**Step 2. Select a Style**

| Designates |                            |
|------------|----------------------------|
| DB         | Stainless Steel Plug       |
| DC         | Stainless Steel Receptacle |

**Step 3. Select a Shell Size**

| Designates |            |
|------------|------------|
| 9-25       | Shell Size |

**Step 4. Separator**

| Designates |           |
|------------|-----------|
| —          | Separator |

**Step 5. Insert Arrangements-**  
Consult Amphenol Aerospace for insert arrangements available.

**Step 6. Select a Contact Type**

| Designates |        |
|------------|--------|
| P          | Pin    |
| S          | Socket |

**Step 7. Select an Alternate Keying Position**

| Designates |            |
|------------|------------|
| N          | Normal     |
| A-E        | Alternates |

**Step 8. Ordering Option**

| Designates |                               |
|------------|-------------------------------|
| H          | Without Contacts & Seal Plugs |
| Blank      | With Contacts & Seal Plugs    |



# TVP00R (D38999/20) - Crimp, Metal CTVP00R (D38999/20) - Crimp, Composite

## Wall Mounting Receptacle


### PART #

To complete,  
see how to order  
pages 25-27.


| Connector Type | Shell Style | Service Class | Shell Size & Insert Arr | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| TVP            | 00          | RW            | 9-35                    | P            | B                  | (453)              |
| TVPS           | 00          | RK            | X-X                     | X            | X                  | (XXX)              |
| TVPS           | 00          | RF            | X-X                     | X            | X                  | (XXX)              |
| TVPS           | 00          | RS            | X-X                     | X            | X                  | (XXX)              |
| CTVP           | 00          | RW            | X-X                     | X            | X                  | (XXX)              |
| CTVPS          | 00          | RF            | X-X                     | X            | X                  | (XXX)              |
| D38999/        | 20          | X             | X-X                     | X            | X                  | NA                 |

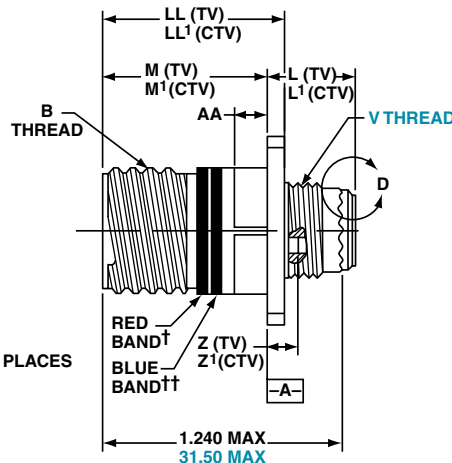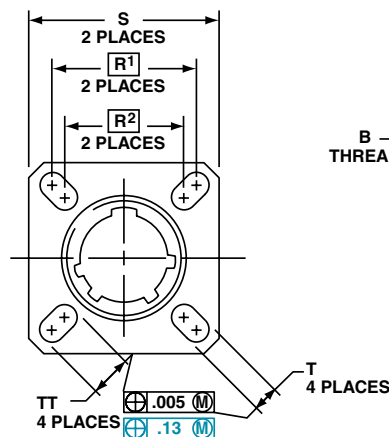


VIEW D  
FOR SIZE 8 COAXIAL ONLY,  
RELATIVE TO -A-




VIEW D  
FOR SIZE 8 TWINAX ONLY,  
RELATIVE TO -A-



PANEL HOLE  
DIMENSIONS



BACK PANEL  
MOUNTING



FRONT PANEL  
MOUNTING

† Red band indicates fully mated

†† Blue band indicates rear release contact retention system

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P=0.3L-TS (Plated) | L Max. (TV) | L' Max. (CTV) | M +.000 -0.005 (TV) | M' +.000 -0.005 (CTV) | R1    | R2    | S Max. | T ±.008 | Z Max. (TV) | Z' Max. (CTV) | A1 Back Panel Mount | A2 Front Panel Mount | AA Max. Panel Thickness | LL +.006 -0.000 (TV) | LL1 ±.005 (CTV) | TT ±.008 |
|------------|--------------------|-----------------------------------------|-------------|---------------|---------------------|-----------------------|-------|-------|--------|---------|-------------|---------------|---------------------|----------------------|-------------------------|----------------------|-----------------|----------|
| 9          | A                  | .6250                                   | .469        | .514          | .820                | .773                  | .719  | .594  | .948   | .128    | .153        | .198          | .655                | .516                 | .234                    | .905                 | .908            | .216     |
| 11         | B                  | .7500                                   | .469        | .514          | .820                | .773                  | .812  | .719  | 1.043  | .128    | .153        | .198          | .796                | .625                 | .234                    | .905                 | .908            | .194     |
| 13         | C                  | .8750                                   | .469        | .514          | .820                | .773                  | .906  | .812  | 1.137  | .128    | .153        | .198          | .922                | .750                 | .234                    | .905                 | .908            | .194     |
| 15         | D                  | 1.0000                                  | .469        | .514          | .820                | .773                  | .969  | .906  | 1.232  | .128    | .153        | .198          | 1.047               | .906                 | .234                    | .905                 | .908            | .173     |
| 17         | E                  | 1.1875                                  | .469        | .514          | .820                | .773                  | 1.062 | .969  | 1.323  | .128    | .153        | .198          | 1.219               | 1.016                | .234                    | .905                 | .908            | .194     |
| 19         | F                  | 1.2500                                  | .469        | .514          | .820                | .773                  | 1.156 | 1.062 | 1.449  | .128    | .153        | .198          | 1.297               | 1.141                | .234                    | .905                 | .908            | .194     |
| 21         | G                  | 1.3750                                  | .500        | .545          | .790                | .741                  | 1.250 | 1.156 | 1.575  | .128    | .183        | .228          | 1.442               | 1.266                | .204                    | .905                 | .904            | .194     |
| 23         | H                  | 1.5000                                  | .500        | .545          | .790                | .741                  | 1.375 | 1.250 | 1.701  | .154    | .183        | .228          | 1.547               | 1.375                | .204                    | .905                 | .904            | .242     |
| 25         | J                  | 1.6250                                  | .500        | .545          | .790                | .741                  | 1.500 | 1.375 | 1.823  | .154    | .183        | .228          | 1.672               | 1.484                | .204                    | .905                 | .904            | .242     |

Inches

| Shell Size | MS Shell Size Code | L Max. (TV) | L' Max. (CTV) | M +.00 -0.13 (TV) | M' +.00 -0.13 (CTV) | R1    | R2    | S Max. | T ±.20 | V Thread Metric | Z Max. (TV) | Z' Max. (CTV) | A1 Back Panel Mount | A2 Front Panel Mount | AA Max. | LL +.15 -0.00 (TV) | LL1 ±.13 (CTV) | TT ±.20 |
|------------|--------------------|-------------|---------------|-------------------|---------------------|-------|-------|--------|--------|-----------------|-------------|---------------|---------------------|----------------------|---------|--------------------|----------------|---------|
| 9          | A                  | 11.91       | 13.06         | 20.83             | 19.63               | 18.26 | 15.09 | 24.1   | 3.25   | M12X1-6g        | 3.89        | 5.03          | 16.66               | 13.11                | 5.94    | 22.99              | 23.06          | 5.49    |
| 11         | B                  | 11.91       | 13.06         | 20.83             | 19.63               | 20.62 | 18.26 | 26.5   | 3.25   | M15X1-6g        | 3.89        | 5.03          | 20.22               | 15.88                | 5.94    | 22.99              | 23.06          | 4.93    |
| 13         | C                  | 11.91       | 13.06         | 20.83             | 19.63               | 23.01 | 20.62 | 28.9   | 3.25   | M18X1-6g        | 3.89        | 5.03          | 23.42               | 19.05                | 5.94    | 22.99              | 23.06          | 4.93    |
| 15         | D                  | 11.91       | 13.06         | 20.83             | 19.63               | 24.61 | 23.01 | 31.3   | 3.25   | M22X1-6g        | 3.89        | 5.03          | 26.59               | 23.01                | 5.94    | 22.99              | 23.06          | 4.39    |
| 17         | E                  | 11.91       | 13.06         | 20.83             | 19.63               | 26.97 | 24.61 | 33.7   | 3.25   | M25X1-6g        | 3.89        | 5.03          | 30.96               | 25.81                | 5.94    | 22.99              | 23.06          | 4.93    |
| 19         | F                  | 11.91       | 13.06         | 20.83             | 19.63               | 29.36 | 26.97 | 36.9   | 3.25   | M28X1-6g        | 3.89        | 5.03          | 32.94               | 28.98                | 5.94    | 22.99              | 23.06          | 4.93    |
| 21         | G                  | 12.70       | 13.84         | 20.07             | 18.82               | 31.75 | 29.36 | 40.1   | 3.25   | M31X1-6g        | 4.65        | 5.79          | 36.12               | 32.16                | 5.18    | 22.99              | 22.96          | 4.93    |
| 23         | H                  | 12.70       | 13.84         | 20.07             | 18.82               | 34.93 | 31.75 | 43.3   | 3.91   | M34X1-6g        | 4.65        | 5.79          | 39.29               | 34.93                | 5.18    | 22.99              | 22.96          | 6.15    |
| 25         | J                  | 12.70       | 13.84         | 20.07             | 18.82               | 38.10 | 34.93 | 46.4   | 3.91   | M37X1-6g        | 4.65        | 5.79          | 42.47               | 37.69                | 5.18    | 22.99              | 22.96          | 6.15    |

Millimeters

All dimensions for reference only



Designates true position dimensioning

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH  
SPEED

Fiber  
Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix 1 Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class 1

Back-  
Shells


Options  
Others

### Box Mounting Receptacle


#### PART #

To complete, see how to order pages 25-27.


| Connector Type | Shell Style | Service Class | Shell Size & Insert Arr | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| TVP            | 02          | RW            | 9-35                    | P            | B                  | (453)              |
| TVPS           | 02          | RK            | X-X                     | X            | X                  | (XXX)              |
| TVPS           | 02          | RF            | X-X                     | X            | X                  | (XXX)              |
| TVPS           | 02          | RS            | X-X                     | X            | X                  | (XXX)              |
| CTVP           | 02          | RW            | X-X                     | X            | X                  | (XXX)              |
| CTVPS          | 02          | RF            | X-X                     | X            | X                  | (XXX)              |

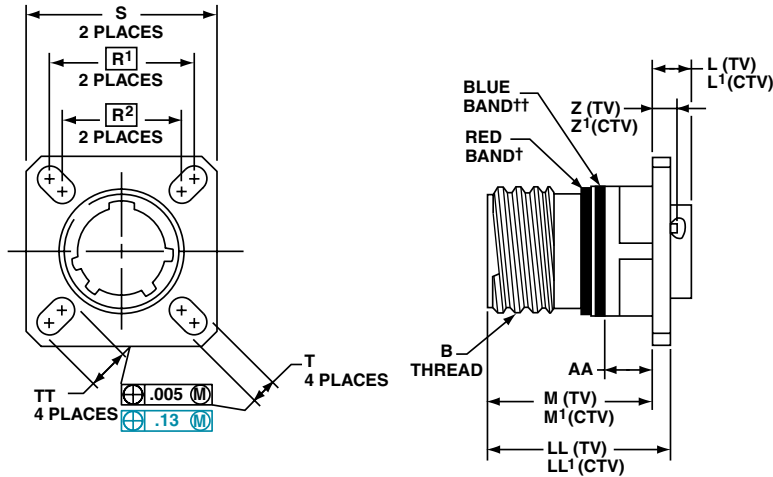

#### PANEL HOLE DIMENSIONS



#### BACK PANEL MOUNTING



#### FRONT PANEL MOUNTING

† Red band indicates fully mated

†† Blue band indicates rear release contact retention system

Consult Amphenol Aerospace for availability of composite box mount receptacles.

Inches

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P=0.3L-TS (Plated) | L Max. (TV) | L' Max. (CTV) | M +.000 - .005 (TV) | M' +.000 - .005 (CTV) | R <sup>1</sup> | R <sup>2</sup> | S Max. | T ±.008 | Z Max. (TV) | Z' Max. (CTV) | A <sup>1</sup> Back Panel Mount | A <sup>2</sup> Front Panel Mount | AA Max. Panel Thickness | LL +.006 - .000 (TV) | LL1 ±.005 (CTV) | TT ±.008 |
|------------|--------------------|-----------------------------------------|-------------|---------------|---------------------|-----------------------|----------------|----------------|--------|---------|-------------|---------------|---------------------------------|----------------------------------|-------------------------|----------------------|-----------------|----------|
| 9          | A                  | .6250                                   | .205        | .250          | .820                | .773                  | .719           | .594           | .948   | .128    | .153        | .198          | .650                            | .510                             | .234                    | .905                 | .908            | .216     |
| 11         | B                  | .7500                                   | .205        | .250          | .820                | .773                  | .812           | .719           | 1.043  | .128    | .153        | .198          | .800                            | .620                             | .234                    | .905                 | .908            | .194     |
| 13         | C                  | .8750                                   | .205        | .250          | .820                | .773                  | .906           | .812           | 1.137  | .128    | .153        | .198          | .910                            | .740                             | .234                    | .905                 | .908            | .194     |
| 15         | D                  | 1.0000                                  | .205        | .250          | .820                | .773                  | .969           | .906           | 1.232  | .128    | .153        | .198          | 1.040                           | .900                             | .234                    | .905                 | .908            | .173     |
| 17         | E                  | 1.1875                                  | .205        | .250          | .820                | .773                  | 1.062          | .969           | 1.323  | .128    | .153        | .198          | 1.210                           | 1.010                            | .234                    | .905                 | .908            | .194     |
| 19         | F                  | 1.2500                                  | .205        | .250          | .820                | .773                  | 1.156          | 1.062          | 1.449  | .128    | .153        | .198          | 1.280                           | 1.130                            | .234                    | .905                 | .908            | .194     |
| 21         | G                  | 1.3750                                  | .235        | .280          | .790                | .741                  | 1.250          | 1.156          | 1.575  | .128    | .183        | .228          | 1.410                           | 1.250                            | .204                    | .905                 | .904            | .194     |
| 23         | H                  | 1.5000                                  | .235        | .280          | .790                | .741                  | 1.375          | 1.250          | 1.701  | .154    | .183        | .228          | 1.530                           | 1.360                            | .204                    | .905                 | .904            | .242     |
| 25         | J                  | 1.6250                                  | .235        | .280          | .790                | .741                  | 1.500          | 1.375          | 1.823  | .154    | .183        | .228          | 1.660                           | 1.470                            | .204                    | .905                 | .904            | .242     |

Millimeters

| Shell Size | MS Shell Size Code | L Max. (TV) | L' Max. (CTV) | M +.00 - .13 (TV) | M' +.00 - .13 (CTV) | R <sup>1</sup> | R <sup>2</sup> | S Max. | T ±.20 | Z Max. (TV) | Z' Max. (CTV) | A <sup>1</sup> Back Panel Mount | A <sup>2</sup> Front Panel Mount | AA Max. | LL +.15 - .00 (TV) | LL1 ±.13 (CTV) | TT ±.20 |
|------------|--------------------|-------------|---------------|-------------------|---------------------|----------------|----------------|--------|--------|-------------|---------------|---------------------------------|----------------------------------|---------|--------------------|----------------|---------|
| 9          | A                  | 5.21        | 6.35          | 20.83             | 19.63               | 18.26          | 15.09          | 24.1   | 3.25   | 3.89        | 5.03          | 16.66                           | 13.11                            | 5.94    | 22.99              | 23.06          | 5.49    |
| 11         | B                  | 5.21        | 6.35          | 20.83             | 19.63               | 20.62          | 18.26          | 26.5   | 3.25   | 3.89        | 5.03          | 20.22                           | 15.88                            | 5.94    | 22.99              | 23.06          | 4.93    |
| 13         | C                  | 5.21        | 6.35          | 20.83             | 19.63               | 23.01          | 20.62          | 28.9   | 3.25   | 3.89        | 5.03          | 23.42                           | 19.05                            | 5.94    | 22.99              | 23.06          | 4.93    |
| 15         | D                  | 5.21        | 6.35          | 20.83             | 19.63               | 24.61          | 23.01          | 31.3   | 3.25   | 3.89        | 5.03          | 26.59                           | 23.01                            | 5.94    | 22.99              | 23.06          | 4.39    |
| 17         | E                  | 5.21        | 6.35          | 20.83             | 19.63               | 26.97          | 24.61          | 33.7   | 3.25   | 3.89        | 5.03          | 30.96                           | 25.81                            | 5.94    | 22.99              | 23.06          | 4.93    |
| 19         | F                  | 5.21        | 6.35          | 20.83             | 19.63               | 29.36          | 26.97          | 36.9   | 3.25   | 3.89        | 5.03          | 32.94                           | 28.98                            | 5.94    | 22.99              | 23.06          | 4.93    |
| 21         | G                  | 5.97        | 7.11          | 20.07             | 18.82               | 31.75          | 29.36          | 40.1   | 3.25   | 4.65        | 5.79          | 36.12                           | 32.16                            | 5.18    | 22.99              | 22.96          | 4.93    |
| 23         | H                  | 5.97        | 7.11          | 20.07             | 18.82               | 34.92          | 31.75          | 43.3   | 3.91   | 4.65        | 5.79          | 39.29                           | 34.93                            | 5.18    | 22.99              | 22.96          | 6.15    |
| 25         | J                  | 5.97        | 7.11          | 20.07             | 18.82               | 38.10          | 34.92          | 46.4   | 3.91   | 4.65        | 5.79          | 42.47                           | 37.69                            | 5.18    | 22.99              | 22.96          | 6.15    |

All dimensions for reference only

□ Designates true position dimensioning



# TV06R (D38999/26) – Crimp, Metal CTV06R (D38999/26) – Crimp, Composite

## Straight Plug


### PART #

To complete,  
see how to order  
pages 25-27.



| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TV             | 06          | RW            | 9-35                     | P            | B                  | (453)              |
| TVS            | 06          | RK            | X-X                      | X            | X                  | (XXX)              |
| TVS            | 06          | RF            | X-X                      | X            | X                  | (XXX)              |
| TVS            | 06          | RS            | X-X                      | X            | X                  | (XXX)              |
| CTV            | 06          | RW            | X-X                      | X            | X                  | (XXX)              |
| CTVS           | 06          | RF            | X-X                      | X            | X                  | (XXX)              |
| D38999/        | 26          | X             | X-X                      | X            | X                  | NA                 |

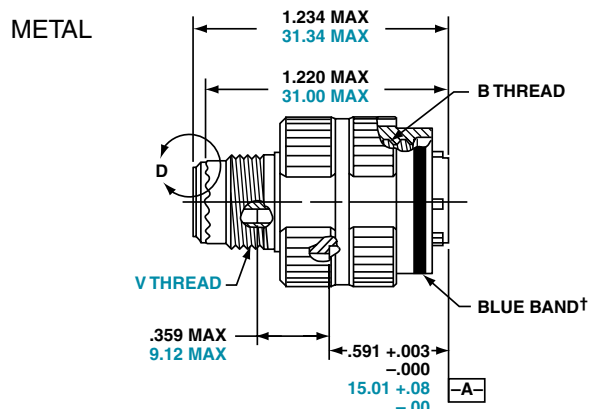


VIEW D  
FOR SIZE 8 COAXIAL ONLY,  
RELATIVE TO -A-



### COMPOSITE

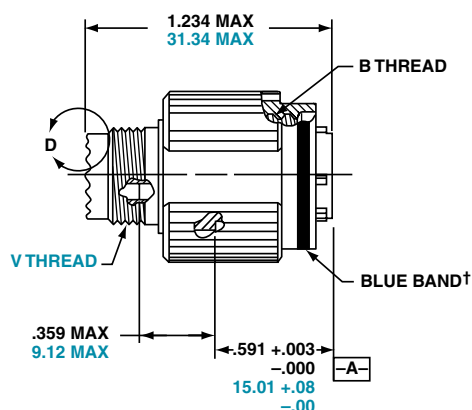

VIEW D  
FOR SIZE 8 TWINAX ONLY,  
RELATIVE TO -A-



† Blue band indicates rear release contact retention system

Inches

| Shell Size | MS Shell Size Code | B Thread<br>0.1P-0.3L-TS-2B<br>(Plated) | Q Dia. Max. |
|------------|--------------------|-----------------------------------------|-------------|
| 9          | A                  | .6250                                   | .858        |
| 11         | B                  | .7500                                   | .984        |
| 13         | C                  | .8750                                   | 1.157       |
| 15         | D                  | 1.0000                                  | 1.280       |
| 17         | E                  | 1.1875                                  | 1.406       |
| 19         | F                  | 1.2500                                  | 1.516       |
| 21         | G                  | 1.3750                                  | 1.642       |
| 23         | H                  | 1.5000                                  | 1.768       |
| 25         | J                  | 1.6250                                  | 1.890       |

All dimensions for reference only.

Millimeters

| Shell Size | MS Shell Size Code | Q Max. | V Thread Metric |
|------------|--------------------|--------|-----------------|
| 9          | A                  | 21.8   | M12X1-6g        |
| 11         | B                  | 25.0   | M15X1-6g        |
| 13         | C                  | 29.4   | M18X1-6g        |
| 15         | D                  | 32.5   | M22X1-6g        |
| 17         | E                  | 35.7   | M25X1-6g        |
| 19         | F                  | 38.5   | M28X1-6g        |
| 21         | G                  | 41.7   | M31X1-6g        |
| 23         | H                  | 44.9   | M34X1-6g        |
| 25         | J                  | 48.0   | M37X1-6g        |

### 38999

|             |
|-------------|
| III         |
| HD          |
| Dualok      |
| II          |
| I           |
| SJT         |
| Accessories |
| Aquacon     |
| Herm/Seal   |
| PCB         |

|              |
|--------------|
| HIGH SPEED   |
| Fiber Optics |
| Contacts     |
| Connectors   |
| Cables       |

|            |
|------------|
| EMI Filter |
| Transient  |

|          |
|----------|
| 26482    |
| Matrix 2 |

|               |
|---------------|
| 83723 III     |
| Matrix   Pyle |

|       |
|-------|
| 26500 |
| Pyle  |

|                           |
|---------------------------|
| 5015                      |
| Crimp Rear Release Matrix |

|         |
|---------|
| 22992   |
| Class I |

|            |
|------------|
| Back-Shell |
|------------|

|         |
|---------|
| Options |
| Others  |

38999

#### PART #

To complete, see how to order pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TV             | 26          | RK            | 9-35                     | P            | N                  | (453)              |
| TV             | 26          | RS            | X-X                      | X            | N                  | (XXX)              |
| MTV            | 26          | RK            | X-X                      | X            | N                  | (XXX)              |
| MTV            | 26          | RS            | X-X                      | X            | N                  | (XXX)              |


For parts with MS Stamping use MTV26( ) part number as shown above.

Designed for high vibration and harsh environments such as aircraft gas turbine engines, the CLUTCH-LOK is also an ideal choice for demanding applications such as aircraft, space and military ground vehicles. The unique clutch design of the Amphenol CLUTCH-LOK means that you don't have to compromise the need for quick, smooth mating of plugs and receptacles in order to get increased uncoupling torque.

The CLUTCH-LOK has proven to not only remain mated and pass all the Series III specification requirements, it also has proven to actually tighten itself under vibration. This is a powerful advantage over the traditionally high vibration application connectors. The CLUTCH-LOK is also a tremendous advantage in inaccessible, hard to reach areas where mating torque is difficult to apply and complete coupling is not verifiable by inspection.

#### CLUTCH-LOK features and benefits:

- High degree of differential torque
- Infinite free coupling and positive metal-to-metal bottoming with each mating
- No settling back to the next ratchet tooth
- Available with stainless steel shells and Class K firewall inserts
- All the advantages of MIL-DTL-38999 Series III including EMI/RFI shielding, electrolytic erosion resistance and contact protection with recessed pins
- Enhanced connector performance at affordable prices
- Completely intermateable with all existing MIL-DTL-38999 Series III connectors
- Fully QPL'd

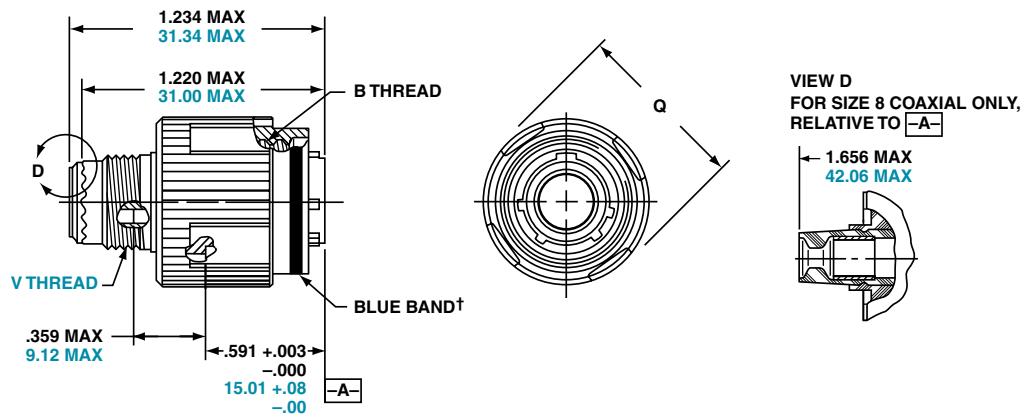

† Blue band indicates rear release contact retention system

Inches

| Shell Size | MS Shell Size Code | B Thread 0.1P-0.3L-TS-2B (Plated) | Q Dia. Max. |
|------------|--------------------|-----------------------------------|-------------|
| 9          | A                  | .6250                             | .858        |
| 11         | B                  | .7500                             | .984        |
| 13         | C                  | .8750                             | 1.157       |
| 15         | D                  | 1.0000                            | 1.280       |
| 17         | E                  | 1.1875                            | 1.406       |
| 19         | F                  | 1.2500                            | 1.516       |
| 21         | G                  | 1.3750                            | 1.642       |
| 23         | H                  | 1.5000                            | 1.768       |
| 25         | J                  | 1.6250                            | 1.890       |

All dimensions for reference only.

Millimeters

| Shell Size | MS Shell Size Code | Q Max. | V Thread Metric |
|------------|--------------------|--------|-----------------|
| 9          | A                  | 21.8   | M12X1-6g        |
| 11         | B                  | 25.0   | M15X1-6g        |
| 13         | C                  | 29.4   | M18X1-6g        |
| 15         | D                  | 32.5   | M22X1-6g        |
| 17         | E                  | 35.7   | M25X1-6g        |
| 19         | F                  | 38.5   | M28X1-6g        |
| 21         | G                  | 41.7   | M31X1-6g        |
| 23         | H                  | 44.9   | M34X1-6g        |
| 25         | J                  | 48.0   | M37X1-6g        |



# TV07R (D38999/24) – Crimp, Metal CTV07R (D38999/24) – Crimp, Composite

## Jam Nut Receptacle

### PART #

To complete,  
see how to order  
pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arr | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|-------------------------|--------------|--------------------|--------------------|
| TV             | 07          | RW            | 9-35                    | P            | B                  | (453)              |
| TVS            | 07          | RK            | X-X                     | X            | X                  | (XXX)              |
| TVS            | 07          | RF            | X-X                     | X            | X                  | (XXX)              |
| TVS            | 07          | RS            | X-X                     | X            | X                  | (XXX)              |
| CTV            | 07          | RW            | X-X                     | X            | X                  | (XXX)              |
| CTVS           | 07          | RF            | X-X                     | X            | X                  | (XXX)              |
| D38999/        | 24          | X             | X-X                     | X            | X                  | NA                 |

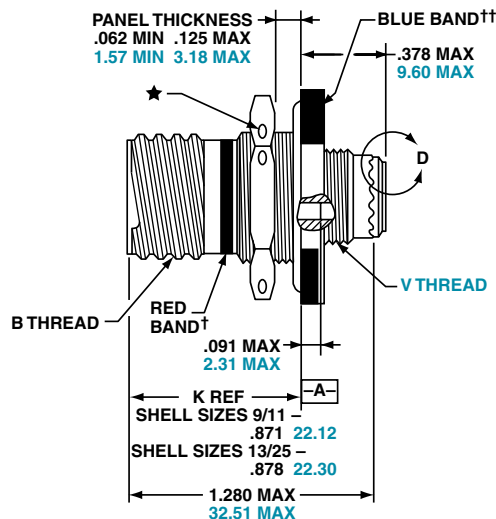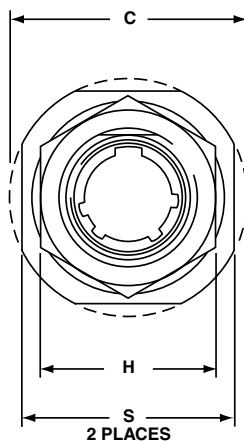


VIEW D  
FOR SIZE 8 COAXIAL ONLY,  
RELATIVE TO -A-



VIEW D  
FOR SIZE 8 TWINAX ONLY,  
RELATIVE TO -A-



PANEL HOLE  
DIMENSIONS



JAM NUT  
D-HOLE  
MOUNTING

† Red band indicates fully mated

†† Blue band indicates rear release contact retention system

□ .059 dia min.

1.5 dia min., 3 lockwire holes Formed lockwire hole design (6 holes) is optional Inches

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | C Max. | D <sup>1</sup> +.010 -0.000 | D <sup>2</sup> +.000 -0.010 | H Hex +.017 -0.016 | S ±.010 |
|------------|--------------------|-----------------------------------------|--------|-----------------------------|-----------------------------|--------------------|---------|
| 9          | A                  | .6250                                   | 1.199  | .693                        | .657                        | .875               | 1.062   |
| 11         | B                  | .7500                                   | 1.386  | .825                        | .770                        | 1.000              | 1.250   |
| 13         | C                  | .8750                                   | 1.511  | 1.010                       | .955                        | 1.188              | 1.375   |
| 15         | D                  | 1.0000                                  | 1.636  | 1.135                       | 1.085                       | 1.312              | 1.500   |
| 17         | E                  | 1.1875                                  | 1.761  | 1.260                       | 1.210                       | 1.438              | 1.625   |
| 19         | F                  | 1.2500                                  | 1.949  | 1.385                       | 1.335                       | 1.562              | 1.812   |
| 21         | G                  | 1.3750                                  | 2.073  | 1.510                       | 1.460                       | 1.688              | 1.938   |
| 23         | H                  | 1.5000                                  | 2.199  | 1.635                       | 1.585                       | 1.812              | 2.062   |
| 25         | J                  | 1.6250                                  | 2.323  | 1.760                       | 1.710                       | 2.000              | 2.188   |

Millimeters

| Shell Size | MS Shell Size Code | C Max. | D <sup>1</sup> +.25 -0.00 | D <sup>2</sup> +.00 -0.25 | H Hex +.43 -0.41 | S ±.25 | V Thread Metric |
|------------|--------------------|--------|---------------------------|---------------------------|------------------|--------|-----------------|
| 9          | A                  | 30.45  | 17.60                     | 16.70                     | 22.23            | 26.97  | M12X1-6g        |
| 11         | B                  | 35.20  | 20.96                     | 19.59                     | 25.40            | 31.75  | M15X1-6g        |
| 13         | C                  | 38.38  | 25.65                     | 24.26                     | 30.18            | 34.93  | M18X1-6g        |
| 15         | D                  | 41.55  | 28.83                     | 27.56                     | 33.32            | 38.10  | M22X1-6g        |
| 17         | E                  | 44.73  | 32.01                     | 30.73                     | 36.53            | 41.28  | M25X1-6g        |
| 19         | F                  | 49.50  | 35.18                     | 33.91                     | 39.67            | 46.02  | M28X1-6g        |
| 21         | G                  | 52.65  | 38.35                     | 37.08                     | 42.80            | 49.23  | M31X1-6g        |
| 23         | H                  | 55.85  | 41.53                     | 40.26                     | 46.02            | 52.37  | M34X1-6g        |
| 25         | J                  | 59.00  | 44.70                     | 43.43                     | 50.80            | 55.58  | M37X1-6g        |

All dimensions for reference only NOTE: Deep reach receptacles are available for panel thicknesses up to .750 max.

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH  
SPEED

Fiber  
Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

### Line Receptacle

38999

III  
HD  
Dualok  
II  
I  
SJT  
Accessories  
Aquacon  
Herm/Seal  
PCB

HIGH SPEED  
Fiber Optics  
Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear Release  
Matrix

22992  
Class L



Back-  
Shells

Options  
Others


#### PART #

To complete,  
see how to order  
pages 25-27.


| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TV             | 01          | RW            | 9-35                     | P            | B                  | (453)              |
| TVS            | 01          | RF            | X-X                      | X            | X                  | (XXX)              |
| CTV            | 01          | RW            | X-X                      | X            | X                  | (XXX)              |
| CTVS           | 01          | RF            | X-X                      | X            | X                  | (XXX)              |

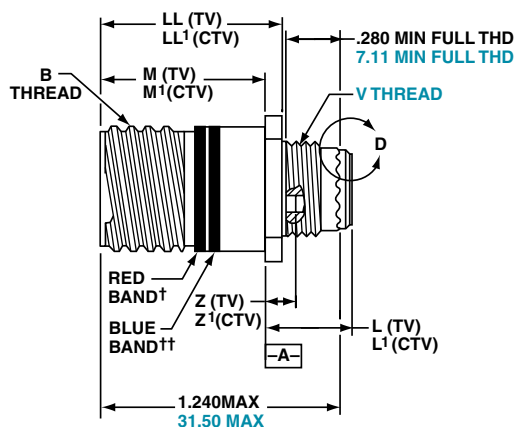

VIEW D  
FOR SIZE 8 COAXIAL ONLY,  
RELATIVE TO -A-



VIEW D  
FOR SIZE 8 TWINAX ONLY,  
RELATIVE TO -A-



† Red band indicates fully mated

†† Blue band indicates rear release contact retention system

Inches

| Shell Size | MS Shell Size Code | B Thread<br>0.1P-0.3L-<br>TS-2A<br>(Plated) | M<br>+.000<br>-.005<br>(TV) | M'<br>+.000<br>-.005<br>(CTV) | L<br>Max.<br>(TV) | L'<br>Max.<br>(CTV) | S<br>±.010<br>(TV) | S'<br>±.010<br>(CTV) | Z Max<br>(TV) | Z' Max<br>(CTV) | GG<br>±.010<br>(TV) | GG'<br>±.010<br>(CTV) | LL<br>+.006<br>-.000<br>(TV) | LL'<br>±.005<br>(CTV) |
|------------|--------------------|---------------------------------------------|-----------------------------|-------------------------------|-------------------|---------------------|--------------------|----------------------|---------------|-----------------|---------------------|-----------------------|------------------------------|-----------------------|
| 9          | A                  | .6250                                       | .820                        | .773                          | .469              | .514                | .675               | .635                 | .153          | .198            | .812                | .699                  | .905                         | .908                  |
| 11         | B                  | .7500                                       | .820                        | .773                          | .469              | .514                | .800               | .765                 | .153          | .198            | .905                | .875                  | .905                         | .908                  |
| 13         | C                  | .8750                                       | .820                        | .773                          | .469              | .514                | .925               | .885                 | .153          | .198            | 1.093               | 1.007                 | .905                         | .908                  |
| 15         | D                  | 1.0000                                      | .820                        | .773                          | .469              | .514                | 1.050              | 1.100                | .153          | .198            | 1.219               | 1.140                 | .905                         | .908                  |
| 17         | E                  | 1.1875                                      | .820                        | .773                          | .469              | .514                | 1.238              | 1.197                | .153          | .198            | 1.375               | 1.229                 | .905                         | .908                  |
| 19         | F                  | 1.2500                                      | .820                        | .773                          | .469              | .514                | 1.300              | 1.260                | .153          | .198            | 1.469               | 1.380                 | .905                         | .908                  |
| 21         | G                  | 1.3750                                      | .790                        | .741                          | .500              | .545                | 1.425              | 1.385                | .183          | .228            | 1.625               | 1.493                 | .905                         | .904                  |
| 23         | H                  | 1.5000                                      | .790                        | .741                          | .500              | .545                | 1.550              | 1.510                | .183          | .228            | 1.750               | 1.626                 | .905                         | .904                  |
| 25         | J                  | 1.6250                                      | .790                        | .741                          | .500              | .545                | 1.675              | 1.635                | .183          | .228            | 1.875               | 1.777                 | .905                         | .904                  |

Millimeters

| Shell Size | MS Shell Size Code | M<br>+.00-.013<br>(TV) | M'<br>+.00<br>-.13<br>(CTV) | L Max.<br>(TV) | L'<br>Max.<br>(CTV) | S ±.25<br>(TV) | S'<br>±.010<br>(CTV) | V Thread<br>Metric | Z Max<br>(TV) | Z' Max<br>(CTV) | GG<br>±.25<br>(TV) | GG'<br>±.25<br>(CTV) | LL<br>+.15<br>-.00<br>(TV) | LL'<br>±.13<br>(CTV) |
|------------|--------------------|------------------------|-----------------------------|----------------|---------------------|----------------|----------------------|--------------------|---------------|-----------------|--------------------|----------------------|----------------------------|----------------------|
| 9          | A                  | 20.83                  | 19.63                       | 11.91          | 13.06               | 17.15          | 16.13                | M12X1-6g           | 3.89          | 5.03            | 20.62              | 17.75                | 22.99                      | 23.06                |
| 11         | B                  | 20.83                  | 19.63                       | 11.91          | 13.06               | 20.32          | 19.43                | M15X1-6g           | 3.89          | 5.03            | 22.99              | 22.22                | 22.99                      | 23.06                |
| 13         | C                  | 20.83                  | 19.63                       | 11.91          | 13.06               | 23.50          | 22.47                | M18X1-6g           | 3.89          | 5.03            | 27.76              | 25.57                | 22.99                      | 23.06                |
| 15         | D                  | 20.83                  | 19.63                       | 11.91          | 13.06               | 26.67          | 27.94                | M22X1-6g           | 3.89          | 5.03            | 30.96              | 28.95                | 22.99                      | 23.06                |
| 17         | E                  | 20.83                  | 19.63                       | 11.91          | 13.06               | 31.45          | 30.40                | M25X1-6g           | 3.89          | 5.03            | 34.93              | 31.21                | 22.99                      | 23.06                |
| 19         | F                  | 20.83                  | 19.63                       | 11.91          | 13.06               | 33.02          | 32.00                | M28X1-6g           | 3.89          | 5.03            | 37.31              | 35.05                | 22.99                      | 23.06                |
| 21         | G                  | 20.07                  | 18.82                       | 12.70          | 13.84               | 36.20          | 35.18                | M31X1-6g           | 4.65          | 5.79            | 41.28              | 37.92                | 22.99                      | 22.96                |
| 23         | H                  | 20.07                  | 18.82                       | 12.70          | 13.84               | 39.37          | 38.35                | M34X1-6g           | 4.65          | 5.79            | 44.45              | 41.30                | 22.99                      | 22.96                |
| 25         | J                  | 20.07                  | 18.82                       | 12.70          | 13.84               | 42.55          | 41.53                | M37X1-6g           | 4.65          | 5.79            | 47.63              | 45.13                | 22.99                      | 22.96                |


All dimensions for reference only

# TV09R – Crimp, Metal Flange Mounting Plug

## PART #

To complete, see how to  
order pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TV             | 09          | RW            | 9-35                     | P            | B                  | (453)              |
| TVS            | 09          | RF            | X-X                      | X            | X                  | (XXX)              |

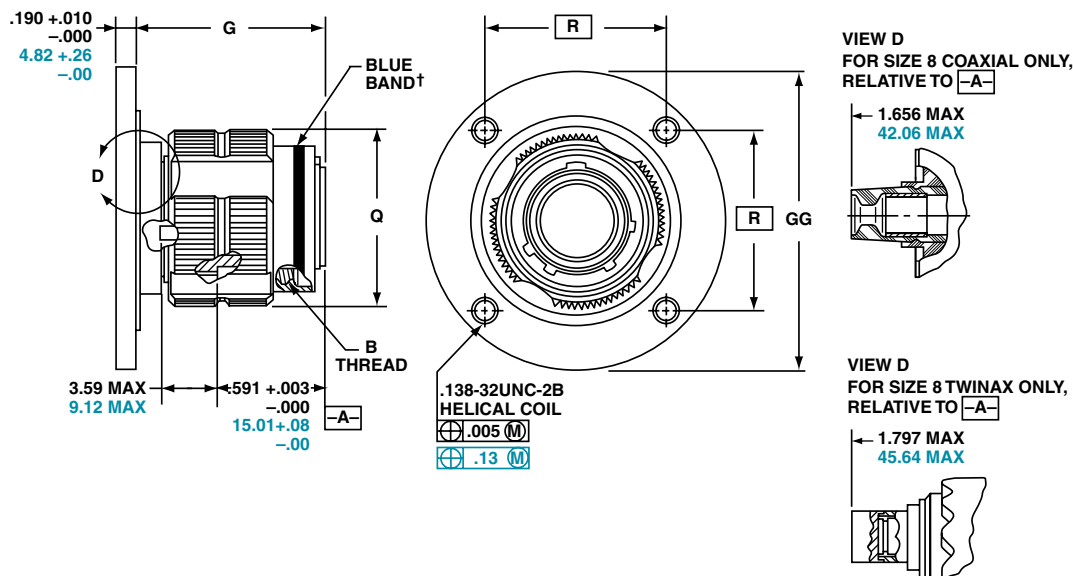

† Blue band indicates rear release contact retention system

Inches

| Shell Size | MS Shell Size Coded | B Thread 0.1P-0.3L-TS-2A (Plated) | G ±.060 | Q Dia. Max | R     | GG Dia ±.005 |
|------------|---------------------|-----------------------------------|---------|------------|-------|--------------|
| 9**        | A                   | .6250                             | 1.106   | .859       | 1.038 | 1.838        |
| 11         | B                   | .7500                             | 1.106   | .969       | 1.115 | 1.948        |
| 13**       | C                   | .8750                             | 1.106   | 1.141      | 1.240 | 2.124        |
| 15         | D                   | 1.0000                            | 1.106   | 1.266      | 1.327 | 2.248        |
| 17         | E                   | 1.1875                            | 1.106   | 1.391      | 1.417 | 2.375        |
| 19         | F                   | 1.2500                            | 1.356   | 1.500      | 1.557 | 2.495        |
| 21         | G                   | 1.3750                            | 1.356   | 1.625      | 1.624 | 2.568        |
| 23         | H                   | 1.5000                            | 1.356   | 1.750      | 1.713 | 2.723        |
| 25         | J                   | 1.6250                            | 1.356   | 1.875      | 1.801 | 2.848        |

Millimeters

| Shell Size | MS Shell Size Coded | G ±.152 | Q Dia. Max | R     | GG Dia ±.13 |
|------------|---------------------|---------|------------|-------|-------------|
| 9**        | A                   | 28.09   | 21.82      | 26.37 | 46.69       |
| 11         | B                   | 28.09   | 24.62      | 28.32 | 49.48       |
| 13**       | C                   | 28.09   | 28.98      | 31.50 | 53.95       |
| 15         | D                   | 28.09   | 32.16      | 33.71 | 57.10       |
| 17         | E                   | 28.09   | 35.33      | 35.99 | 60.33       |
| 19         | F                   | 34.44   | 38.10      | 39.55 | 63.37       |
| 21         | G                   | 34.44   | 41.28      | 41.25 | 65.23       |
| 23         | H                   | 34.44   | 44.45      | 43.51 | 69.16       |
| 25         | J                   | 34.44   | 47.63      | 45.75 | 72.34       |

All dimensions for reference only

\*\* Partially tooled. Consult Amphenol Aerospace for availability

□ Designates true position dimensioning

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH  
SPEED

Fiber  
Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class 1

Back-  
Shells

Options  
Others


### Box Mounting Receptacle

38999

#### PART #

To complete, see how to order pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TVPS           | 02          | Y             | 9-35                     | P            | B                  | (453)              |
| TVPS           | 02          | YN            | X-X                      | X            | X                  | (XXX)              |
| D38999/        | 21          | X             | X-X                      | X            | X                  | NA                 |

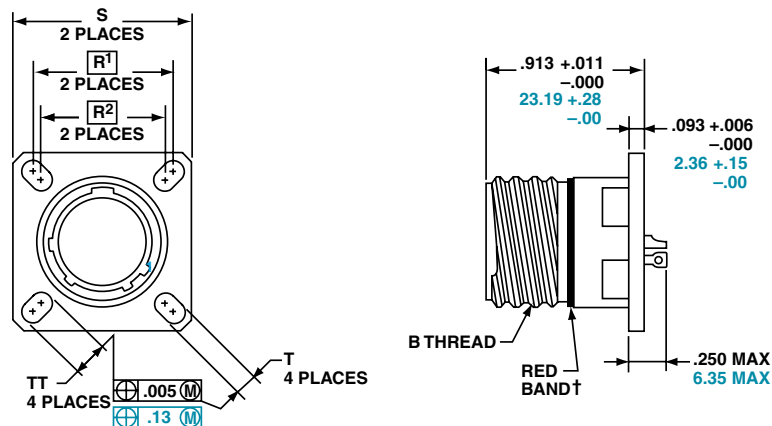

† Red band indicates fully mated

NOTE: Consult Amphenol Aerospace for availability of non-glass-sealed versions with printed circuit tail contacts.

Inches

| Shell Size | MS Shell Size Coded | B Thread 0.1P-0.3L-TS (Plated) | R1    | R2    | S ±.010 | T ±.008 | TT ±.008 |
|------------|---------------------|--------------------------------|-------|-------|---------|---------|----------|
| 9          | A                   | .6250                          | .719  | .594  | .938    | .128    | .216     |
| 11         | B                   | .7500                          | .812  | .719  | 1.031   | .128    | .194     |
| 13         | C                   | .8750                          | .906  | .812  | 1.125   | .128    | .194     |
| 15         | D                   | 1.0000                         | .969  | .906  | 1.219   | .128    | .173     |
| 17         | E                   | 1.1875                         | 1.062 | .969  | 1.312   | .128    | .194     |
| 19         | F                   | 1.2500                         | 1.156 | 1.062 | 1.438   | .128    | .194     |
| 21         | G                   | 1.3750                         | 1.250 | 1.156 | 1.562   | .128    | .194     |
| 23         | H                   | 1.5000                         | 1.375 | 1.250 | 1.688   | .154    | .242     |
| 25         | J                   | 1.6250                         | 1.500 | 1.375 | 1.812   | .154    | .242     |

Millimeters

| Shell Size | MS Shell Size Coded | R1    | R2    | S ±.25 | T ±.20 | TT ±.20 |
|------------|---------------------|-------|-------|--------|--------|---------|
| 9          | A                   | 18.26 | 15.09 | 23.83  | 3.25   | 5.49    |
| 11         | B                   | 20.62 | 18.26 | 26.19  | 3.25   | 4.93    |
| 13         | C                   | 23.01 | 20.62 | 28.58  | 3.25   | 4.93    |
| 15         | D                   | 24.61 | 23.01 | 30.96  | 3.25   | 4.39    |
| 17         | E                   | 26.97 | 24.61 | 33.32  | 3.25   | 4.93    |
| 19         | F                   | 29.36 | 26.97 | 36.53  | 3.25   | 4.93    |
| 21         | G                   | 31.75 | 29.36 | 39.67  | 3.25   | 4.93    |
| 23         | H                   | 34.93 | 31.75 | 42.88  | 3.91   | 6.15    |
| 25         | J                   | 38.10 | 34.93 | 46.02  | 3.91   | 6.15    |

All dimensions for reference only

□ Designates true position dimensioning

# TVS07Y (D38999/23) – Hermetic



Stainless Steel

Jam Nut Receptacle


## PART #

To complete,  
see how to order  
pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TVS            | 07          | Y             | 9-35                     | P            | B                  | (453)              |
| TVS            | 07          | YN            | X-X                      | X            | X                  | (XXX)              |
| D38999/        | 23          | X             | X-X                      | X            | X                  | NA                 |

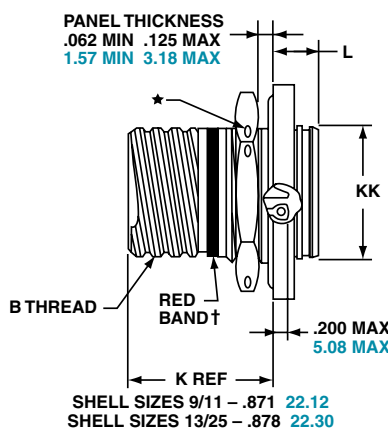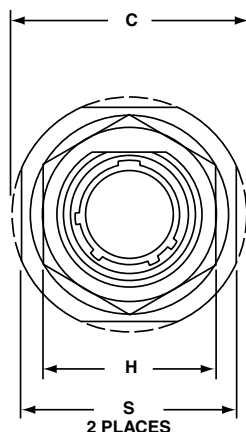

## PANEL HOLE DIMENSIONS



† Red band indicates fully mated

□ .059 dia min.

1.5 dia min. 3 lockwire holes

Formed lockwire hole design (6 holes) is optional.

Inches

| Shell Size | MS Shell Size code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | C Max | D <sup>1</sup> +.010 - .000 | D <sup>2</sup> +.000 - .010 | H Hex +.017 - .016 | L Max | S ±.010 | KK +.011 - .000 |
|------------|--------------------|-----------------------------------------|-------|-----------------------------|-----------------------------|--------------------|-------|---------|-----------------|
| 9          | A                  | .6250                                   | 1.199 | .693                        | .657                        | .875               | .357  | 1.062   | .642            |
| 11         | B                  | .7500                                   | 1.386 | .825                        | .770                        | 1.000              | .357  | 1.250   | .766            |
| 13         | C                  | .8750                                   | 1.511 | 1.010                       | .955                        | 1.188              | .357  | 1.375   | .892            |
| 15         | D                  | 1.0000                                  | 1.636 | 1.135                       | 1.085                       | 1.312              | .357  | 1.500   | 1.018           |
| 17         | E                  | 1.1875                                  | 1.761 | 1.260                       | 1.210                       | 1.438              | .357  | 1.625   | 1.142           |
| 19         | F                  | 1.2500                                  | 1.949 | 1.385                       | 1.335                       | 1.562              | .381  | 1.812   | 1.268           |
| 21         | G                  | 1.3750                                  | 2.073 | 1.510                       | 1.460                       | 1.688              | .381  | 1.938   | 1.392           |
| 23         | H                  | 1.5000                                  | 2.199 | 1.635                       | 1.585                       | 1.812              | .381  | 2.062   | 1.518           |
| 25         | J                  | 1.6250                                  | 2.323 | 1.760                       | 1.710                       | 2.000              | .381  | 2.188   | 1.642           |

Millimeters

| Shell Size | MS Shell Size code | C Max | D <sup>1</sup> +.25 - .00 | D <sup>2</sup> +.00 - .25 | H Hex +.43 - .41 | L Max | S ±.25 | KK +.28 - .00 |
|------------|--------------------|-------|---------------------------|---------------------------|------------------|-------|--------|---------------|
| 9          | A                  | 30.45 | 17.60                     | 16.70                     | 22.23            | 9.07  | 26.97  | 16.31         |
| 11         | B                  | 35.20 | 20.96                     | 19.59                     | 25.40            | 9.07  | 31.75  | 19.46         |
| 13         | C                  | 38.38 | 25.65                     | 24.26                     | 30.18            | 9.07  | 34.93  | 22.66         |
| 15         | D                  | 41.55 | 28.83                     | 27.56                     | 33.32            | 9.07  | 38.10  | 25.86         |
| 17         | E                  | 44.73 | 32.01                     | 30.73                     | 36.53            | 9.07  | 41.28  | 29.01         |
| 19         | F                  | 49.50 | 35.18                     | 33.91                     | 39.67            | 9.68  | 46.02  | 32.21         |
| 21         | G                  | 52.65 | 38.35                     | 37.08                     | 42.80            | 9.68  | 49.23  | 35.36         |
| 23         | H                  | 55.85 | 41.53                     | 40.26                     | 46.02            | 9.68  | 52.37  | 38.56         |
| 25         | J                  | 59.00 | 44.70                     | 43.43                     | 50.80            | 9.68  | 55.58  | 41.71         |

All dimensions for reference only

38999

III

HD

Duallok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH SPEED

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear Release Matrix

22992  
Class I


Back-Shell

Options  
Others

### Solder Mounting Receptacle

38999

|             |
|-------------|
| III         |
| HD          |
| Dualok      |
| II          |
| I           |
| SJT         |
| Accessories |
| Aquacon     |
| Herm/Seal   |
| PCB         |

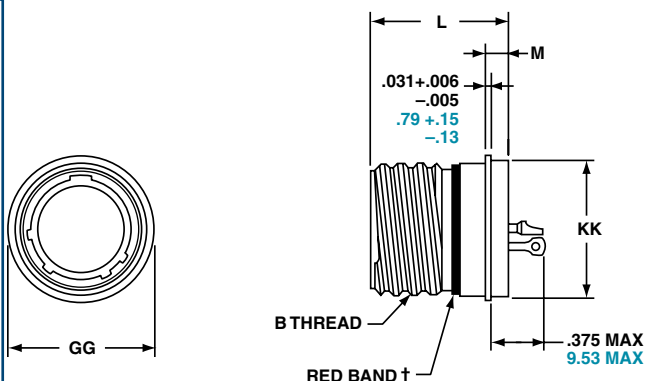

† Red band indicates fully mated

Inches

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | L +.011 / -.005 | M +.006 / -.005 | GG Dia. +.011 / -.010 | KK Dia. +.011 / -.005 |
|------------|--------------------|-----------------------------------------|-----------------|-----------------|-----------------------|-----------------------|
| 9          | A                  | .6250                                   | .806            | .125            | .750                  | .672                  |
| 11         | B                  | .7500                                   | .806            | .125            | .844                  | .781                  |
| 13         | C                  | .8750                                   | .806            | .125            | .969                  | .906                  |
| 15         | D                  | 1.0000                                  | .806            | .125            | 1.094                 | 1.031                 |
| 17         | E                  | 1.1875                                  | .806            | .125            | 1.218                 | 1.156                 |
| 19         | F                  | 1.2500                                  | .806            | .125            | 1.312                 | 1.250                 |
| 21         | G                  | 1.3750                                  | .806            | .125            | 1.438                 | 1.375                 |
| 23         | H                  | 1.5000                                  | .838            | .156            | 1.563                 | 1.500                 |
| 25         | J                  | 1.6250                                  | .838            | .156            | 1.688                 | 1.625                 |

Millimeters

| Shell Size | MS Shell Size Code | L +.28 / -.00 | M +.15 / -.13 | GG Dia. +.28 / -.25 | KK Dia. +.03 / -.13 |
|------------|--------------------|---------------|---------------|---------------------|---------------------|
| 9          | A                  | 20.47         | 3.18          | 19.05               | 17.07               |
| 11         | B                  | 20.47         | 3.18          | 21.44               | 19.84               |
| 13         | C                  | 20.47         | 3.18          | 24.61               | 23.01               |
| 15         | D                  | 20.47         | 3.18          | 27.79               | 26.19               |
| 17         | E                  | 20.47         | 3.18          | 30.94               | 29.36               |
| 19         | F                  | 20.47         | 3.18          | 33.32               | 31.75               |
| 21         | G                  | 20.47         | 3.18          | 36.53               | 34.93               |
| 23         | H                  | 21.29         | 3.96          | 39.70               | 38.10               |
| 25         | J                  | 21.29         | 3.96          | 42.88               | 41.28               |

#### PART #

To complete, see how to order pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TVS            | I           | Y             | 9-35                     | P            | B                  | (453)              |
| TVS            | I           | YN            | X-X                      | X            | X                  | (XXX)              |
| D38999/        | 25          | X             | X-X                      | X            | X                  | NA                 |

HIGH SPEED  
Fiber Optics  
Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear Release  
Matrix


22992  
Class L

Back-  
Shells

Options  
Others

## TVSHIY (D38999/27) – Hermetic, Stainless Steel

### Weld Mounting Receptacle

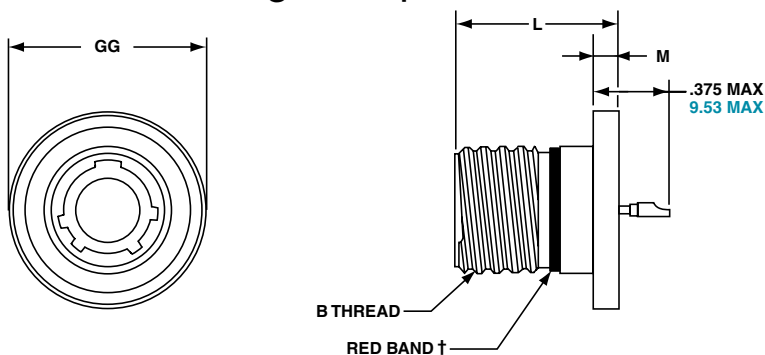

† Red band indicates fully mated

Inches

| Shell Size | MS Shell Size Code | B Thread Class 2A 0.1P-0.3L-TS (Plated) | L +.011 / -.000 | M +.006 / -.005 | GG Dia. +.011 / -.010 |
|------------|--------------------|-----------------------------------------|-----------------|-----------------|-----------------------|
| 9          | A                  | .6250                                   | .806            | .125            | .973                  |
| 11         | B                  | .7500                                   | .806            | .125            | 1.095                 |
| 13         | C                  | .8750                                   | .806            | .125            | 1.221                 |
| 15         | D                  | 1.0000                                  | .806            | .125            | 1.347                 |
| 17         | E                  | 1.1875                                  | .806            | .125            | 1.434                 |
| 19         | F                  | 1.2500                                  | .806            | .125            | 1.579                 |
| 21         | G                  | 1.3750                                  | .806            | .125            | 1.721                 |
| 23         | H                  | 1.5000                                  | .838            | .156            | 1.886                 |
| 25         | J                  | 1.6250                                  | .838            | .156            | 1.973                 |

Millimeters

| Shell Size | MS Shell Size Code | L +.28 / -.00 | M +.15 / -.13 | GG Dia. +.25 / -.00 |
|------------|--------------------|---------------|---------------|---------------------|
| 9          | A                  | 20.47         | 3.18          | 24.71               |
| 11         | B                  | 20.47         | 3.18          | 27.81               |
| 13         | C                  | 20.47         | 3.18          | 31.01               |
| 15         | D                  | 20.47         | 3.18          | 34.21               |
| 17         | E                  | 20.47         | 3.18          | 36.42               |
| 19         | F                  | 20.47         | 3.18          | 40.11               |
| 21         | G                  | 20.47         | 3.18          | 43.71               |
| 23         | H                  | 21.29         | 3.96          | 47.90               |
| 25         | J                  | 21.29         | 3.96          | 50.11               |

#### PART #

To complete, see how to order pages 25-27.

| Connector Type | Shell Style | Service Class | Shell Size & Insert Arrg | Contact Type | Alternate Position | Special Variations |
|----------------|-------------|---------------|--------------------------|--------------|--------------------|--------------------|
| TVS            | HI          | Y             | 9-35                     | P            | B                  | (453)              |
| TVS            | HI          | YN            | X-X                      | X            | X                  | (XXX)              |
| D38999/        | 27          | X             | X-X                      | X            | X                  | NA                 |

All dimensions for reference only

# Series III, TV Breakaway Fail Safe Connectors

## Quick-Disconnect with an Axial Pull of Lanyard

**Amphenol**  
Aerospace

**Amphenol® Tri-Start Breakaway Fail Safe Connectors provide unequalled performance in environments requiring instant disengagement.**

Designed to provide quick disconnect of a connector plug and receptacle with an axial pull on the lanyard. The "Breakaway" Fail Safe connector family offers a wide range of electrical and mechanical features:

- Instant decoupling and damage free separation
- Completely interchangeable with standard receptacles (D38999/20 and /24)
- Inventory support commonality through the use of standard insert arrangements and contacts

Breakaway unmating is initiated by applying a pull force to the lanyard which causes the operating sleeve on the plug to move away from the receptacle. Coupling segments on the plug then move away from the mating receptacle while expanding, thus releasing the receptacle. After completion of the unmating sequence, spring compression returns the sleeve and segments to their original positions. Unmating of the plug may also be accomplished by normal rotation of the coupling ring without affecting the breakaway capability.



**Amphenol offers a variety of lanyard plug styles including MIL-STD-1760 types 1, 2 and 6 for Stores Management applications.**

**The Tri-Start Breakaway Fail Safe connector exceeds the MIL-Spec Series III requirements for EM/EMP shielding and features include:**

- Solid metal-to-metal coupling
- EMI grounding fingers
- Conductive finishes

**Amphenol Breakaway Fail Safe connectors are qualified to MIL-DTL-38999/29, /30 and /31 (for MIL-STD-1760 Stores Management applications). In fact, Amphenol offers more qualified Breakaway shell size and insert combinations than any other QPL supplier.**

In addition to standard Breakaway connectors, Amphenol also manufactures custom breakaway connectors including those with:

- Highly durable non-metallic operating sleeves in a variety of lengths and diameters
- Increased pull-force capability
- Low-profile designs
- Custom lanyard lengths and backshells
- Low force separation capabilities
- Low insertion/separation force contacts
- Non-cadmium finishes


Whether you need a standard Breakaway, one of our custom Breakaways or a unique Breakaway design, please contact your local Amphenol representative.

Contact Amphenol Aerospace for more information on breakaway, quick-disconnect connectors. Other Amphenol circular families (MIL-DTL-26482, MIL-DTL-83723) also offer breakaway quick-disconnect connectors.

See accessories for breakaway connectors on page 111.



**Breakaway with Coax Contacts**

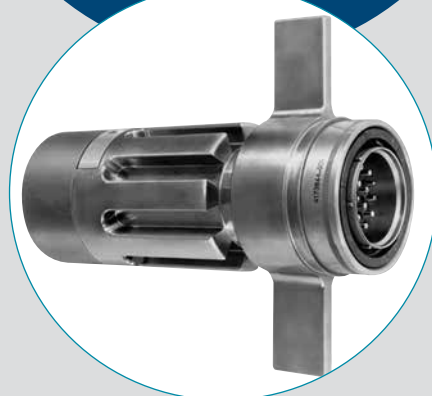

**Special configuration Fail Safe used on space telescope application.**

Lanyard is replaced by a swivel ring for remote disconnect and "wing arms" have been added for manual actuation accessibility by gloved astronauts.

**38999**

|             |
|-------------|
| III         |
| HD          |
| Dualok      |
| II          |
| I           |
| SJT         |
| Accessories |
| Aquacon     |
| Herm/Seal   |
| PCB         |

|              |
|--------------|
| HIGH SPEED   |
| Fiber Optics |
| Contacts     |
| Connectors   |
| Cables       |

|            |
|------------|
| EMI Filter |
| Transient  |

|          |
|----------|
| 26482    |
| Matrix 2 |

|               |
|---------------|
| 83723 III     |
| Matrix   Pyle |

|       |
|-------|
| 26500 |
| Pyle  |

|                           |
|---------------------------|
| 5015                      |
| Crimp Rear Release Matrix |

|         |
|---------|
| 22992   |
| Class 1 |

|             |
|-------------|
| Back-Shells |
|-------------|

|         |
|---------|
| Options |
| Others  |

## D38999/29 & D38999/30 – Series III TV Breakaway Fail Safe-Crimp, Metal Lanyard Release Plug

38999


### PART #

To complete,  
see how to order  
pages 41-42.

| Connector Type | Shell Style | Shell Size & Insert Arrg | Lanyard Length Code | Contact Type/<br>Alternate Insert Rotation |                |
|----------------|-------------|--------------------------|---------------------|--------------------------------------------|----------------|
| D38999         | 29          | 29                       | E                   | P                                          | (Pins Only)    |
| D38999         | 30          | X-X                      | X                   | X                                          | (Sockets Only) |
| 88             | 5565        | X-X                      | X                   | X                                          |                |
| 91             | 5565        | X-X                      | X                   | X                                          |                |

### METAL

.374 MAX  
9.50 MAX  
OUTER SLEEVE MOVEMENT  
DURING UNMATING THREAD RELEASE

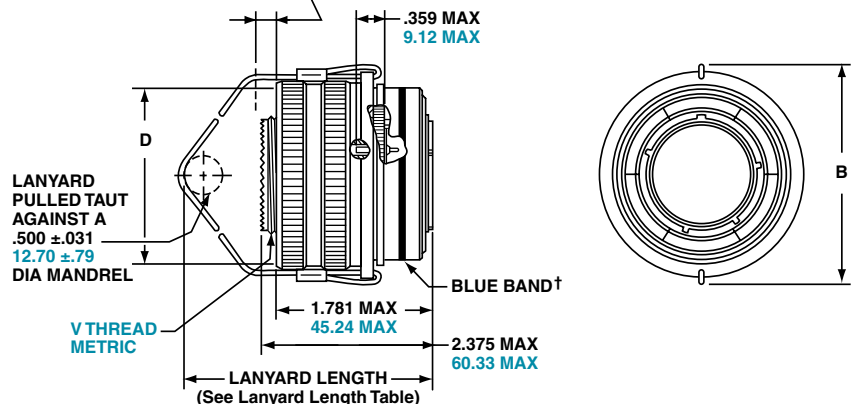

† Blue band indicates rear release contact retention system

Inches

| Shell Size | MS Shell Size Code | B Max | D Max Accessory Dia. |
|------------|--------------------|-------|----------------------|
| 11         | B                  | 1.846 | 1.109                |
| 13         | C                  | 1.972 | 1.250                |
| 15         | D                  | 2.079 | 1.375                |
| 17         | E                  | 2.205 | 1.500                |
| 19         | F                  | 2.301 | 1.625                |
| 21         | G                  | 2.472 | 1.750                |
| 23         | H                  | 2.594 | 1.875                |
| 25         | J                  | 2.705 | 2.000                |

Millimeters

| Shell Size | MS Shell Size Code | B Max | D Max Accessory Dia. | V Thread Metric |
|------------|--------------------|-------|----------------------|-----------------|
| 11         | B                  | 46.89 | 28.17                | M15X1.0-6g      |
| 13         | C                  | 50.09 | 31.75                | M18X1.0-6g      |
| 15         | D                  | 52.81 | 34.93                | M22X1.0-6g      |
| 17         | E                  | 56.01 | 38.10                | M25X1.0-6g      |
| 19         | F                  | 58.45 | 41.28                | M28X1.0-6g      |
| 21         | G                  | 62.79 | 44.45                | M31X1.0-6g      |
| 23         | H                  | 65.89 | 47.63                | M34X1.0-6g      |
| 25         | J                  | 68.71 | 50.08                | M37X1.0-6g      |

All dimensions for reference only

# TV D38999/29 & D38999/30 – Series III

## Breakaway Fail Safe Lanyard Release Plug

### Easy Steps to build a part number... **Military**

| 1.                | 2.                | 3.            | 4.         | 5.                 | 6.                  | 7.                        |
|-------------------|-------------------|---------------|------------|--------------------|---------------------|---------------------------|
| DOD Number Prefix | Spec Sheet Number | Service Class | Shell Size | Insert Arrangement | Lanyard Length Code | Alternate Keying Position |
| <b>D38999/</b>    | <b>29</b>         | <b>F</b>      | <b>E</b>   | <b>35</b>          | <b>P</b>            | <b>N</b>                  |

#### Step 1. DOD Number Prefix

**D38999/** designates MIL-DTL-38999, Series III, Tri-Start Connector

#### Step 2. Select a Specification Sheet Number

|           |                                                      |
|-----------|------------------------------------------------------|
| <b>29</b> | Designates Lanyard Release Plug with pin contacts    |
| <b>30</b> | Designates Lanyard Release Plug with socket contacts |

#### Step 4. & 5 Insert Availability

#### Step 3. Select a Service Class

|          |                                                                                                                                               |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>F</b> | Designates electroless nickel plated aluminum, optimum EMI shielding effectiveness –65dB@10 GHz specification min., 48 hour salt spray, 200°C |
| <b>W</b> | Designates corrosion resistant olive drab cadmium plate aluminum, 500 hour extended salt spray, EMI –50dB@10 GHz specification min., 175°C    |

| Commercial Basic Part#<br>Shell & Insert Arrg. Code | Shell Size-<br>Insert Arrangement | Military Shell Size-<br>Insert Arrangement | Service Rating | Total Contacts | Contact Size |    |    |    |         |        |          |
|-----------------------------------------------------|-----------------------------------|--------------------------------------------|----------------|----------------|--------------|----|----|----|---------|--------|----------|
|                                                     |                                   |                                            |                |                | 22D          | 20 | 16 | 12 | 12 Coax | 8 Coax | 8 Twinax |
| 88/91-556508                                        | 11-2                              | N/A                                        | I              | 2              |              |    | 2  |    |         |        |          |
| 06                                                  | 11-35                             | N/A                                        | M              | 13             | 13           |    |    |    |         |        |          |
| 07                                                  | 11-98                             | N/A                                        | I              | 6              |              | 6  |    |    |         |        |          |
| 10                                                  | 13-4                              | N/A                                        | I              | 4              |              |    | 4  |    |         |        |          |
| 11                                                  | 13-8                              | N/A                                        | I              | 8              |              | 8  |    |    |         |        |          |
| 14                                                  | 13-35                             | N/A                                        | M              | 22             | 22           |    |    |    |         |        |          |
| 13                                                  | 13-98                             | N/A                                        | I              | 10             |              | 10 |    |    |         |        |          |
| 18                                                  | 15-5                              | N/A                                        | II             | 5              |              |    | 5  |    |         |        |          |
| 23                                                  | 15-15                             | N/A                                        | I              | 15             |              | 14 | 1  |    |         |        |          |
| 22                                                  | 15-18                             | N/A                                        | I              | 18             |              | 18 |    |    |         |        |          |
| 19                                                  | 15-19                             | N/A                                        | I              | 19             |              | 19 |    |    |         |        |          |
| 20                                                  | 15-35                             | N/A                                        | M              | 37             | 37           |    |    |    |         |        |          |
| 21                                                  | 15-97                             | N/A                                        | I              | 12             |              | 8  | 4  |    |         |        |          |
| 27                                                  | 17-6                              | E-6                                        | I              | 6              |              |    |    | 6  |         |        |          |
| 28                                                  | 17-8                              | E-8                                        | II             | 8              |              |    | 8  |    |         |        |          |
| 29                                                  | 17-26                             | E-26                                       | I              | 26             |              | 26 |    |    |         |        |          |
| 30                                                  | 17-35                             | E-35                                       | M              | 55             | 55           |    |    |    |         |        |          |
| 31                                                  | 17-99                             | E-99                                       | I              | 23             |              | 21 | 2  |    |         |        |          |
| 37                                                  | 19-11                             | F-11                                       | II             | 11             |              |    | 11 |    |         |        |          |
| 39                                                  | 19-32                             | F-32                                       | I              | 32             |              | 32 |    |    |         |        |          |
| 40                                                  | 19-35                             | F-35                                       | M              | 66             | 66           |    |    |    |         |        |          |
| 47                                                  | 21-11                             | G-11                                       | I              | 11             |              |    |    | 11 |         |        |          |
| 48                                                  | 21-16                             | G-16                                       | II             | 16             |              |    | 16 |    |         |        |          |
| 49                                                  | 21-35                             | G-35                                       | M              | 79             | 79           |    |    |    |         |        |          |
| 51                                                  | 21-39                             | G-39                                       | I              | 39             |              | 37 | 2  |    |         |        |          |
| 50                                                  | 21-41                             | G-41                                       | I              | 41             |              | 41 |    |    |         |        |          |
| 57                                                  | 23-21                             | H-21                                       | II             | 21             |              |    | 21 |    |         |        |          |
| 58                                                  | 23-35                             | H-35                                       | M              | 100            | 100          |    |    |    |         |        |          |
| 59                                                  | 23-53                             | H-53                                       | I              | 53             |              | 53 |    |    |         |        |          |
| 61                                                  | 23-54                             | H-54                                       | M              | 53             | 40           |    | 9  | 4  |         |        |          |
| 60                                                  | 23-55                             | H-55                                       | I              | 55             |              | 55 |    |    |         |        |          |
| 71                                                  | 25-4                              | J-4                                        | I              | 56             |              | 48 | 8  |    |         |        |          |
| 66                                                  | 25-19                             | J-19                                       | I              | 19             |              |    |    | 19 |         |        |          |
| 74                                                  | 25-20                             | J-20                                       | N              | 30             |              | 10 | 13 |    | 4       |        | 3        |
| 72                                                  | 25-24                             | J-24                                       | I              | 24             |              |    | 12 | 12 |         |        |          |
| 67                                                  | 25-29                             | J-29                                       | I              | 29             |              |    | 29 |    |         |        |          |
| 68                                                  | 25-35                             | J-35                                       | M              | 128            | 128          |    |    |    |         |        |          |
| 69                                                  | 25-43                             | J-43                                       | I              | 43             |              | 23 | 20 |    |         |        |          |
| 73                                                  | 25-46                             | J-46                                       | I              | 46             |              | 40 | 4  |    |         | 2*     |          |
| 70                                                  | 25-61                             | J-61                                       | I              | 61             |              | 61 |    |    |         |        |          |

**38999**

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

**HIGH SPEED**

Fiber Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH  
SPEED

Fiber  
Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

### Step 6. Military/ Commercial Lanyard Length Code

Table II

| Lanyard Length (in.) ± .236 | Lanyard Length (mm) ± 6.0 | Lanyard Length Code For Part Number |
|-----------------------------|---------------------------|-------------------------------------|
| 4.016                       | 102                       | A                                   |
| 4.528                       | 115                       | B                                   |
| 5.000                       | 127                       | C                                   |
| 5.512                       | 140                       | D                                   |
| 6.024                       | 153                       | E                                   |
| 6.535                       | 166                       | F                                   |
| 7.008                       | 178                       | G                                   |
| 7.520                       | 191                       | H                                   |
| 7.992                       | 203                       | I                                   |
| 8.503                       | 216                       | J                                   |
| 9.016                       | 229                       | K                                   |
| 9.528                       | 242                       | L                                   |
| 10.000                      | 254                       | M                                   |
| 10.512                      | 267                       | N                                   |
| 11.024                      | 280                       | P                                   |
| 11.535                      | 293                       | R                                   |
| 12.008                      | 305                       | S                                   |
| 12.520                      | 318                       | T                                   |
| 13.031                      | 331                       | U                                   |
| 14.016                      | 356                       | V                                   |
| 15.000                      | 381                       | W                                   |
| 16.024                      | 407                       | X                                   |
| 17.008                      | 432                       | Y                                   |
| 18.031                      | 458                       | Z                                   |

### Step 7. Military Alternate Keying Position

For alternate positions of connector (to prevent cross-mating) see alternate positioning on page 27. (N indicates normal)

## Easy Steps to build a part number... Commercial

**FAIL SAFE 88-5565( ) & 91-5565( )**

Ordering procedure for example part number 88-556529-EP is shown below:

| 1.            | 2.                            | 3.                             | 4.             | 5.                  | 6.                                     |
|---------------|-------------------------------|--------------------------------|----------------|---------------------|----------------------------------------|
| Service Class | Connector Type Identification | Shell Size & Insert Arrg. Code | Required Field | Lanyard Length Code | Contact Type/Alternate Keying Position |
| 88            | 5565                          | 29                             | 0              | E                   | P                                      |

### Step 1. Select a Service Class

|    |                                                                                                                                                 |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 88 | Designates corrosion resistant olive drab cadmium plate over nickel, 500 hour extended salt spray, EMI -50dB @ 10 GHz specification min., 175°C |
| 91 | Designates electroless nickel plated aluminum, optimum EMI shielding effectiveness -65dB @ 10 GHz specification min., 48 hour salt spray, 200°C |

These are standard finishes. Consult Amphenol Aerospace for other variations.

### Step 2. Select a Connector Type Identification

|      |                                                                     |
|------|---------------------------------------------------------------------|
| 5565 | Designates MIL-DTL-38999, Series III Tri-Start Lanyard Release Plug |
|------|---------------------------------------------------------------------|

### Step 3. Select a Commercial Shell Size & Insert Arrangement Code

MIL-DTL-38999, see insert availability chart on page 41.

### Step 4. Required Field

|   |                                  |
|---|----------------------------------|
| 0 | The required field is always a 0 |
|---|----------------------------------|

### Step 5. Select a Lanyard Length Code


See Table II (to the left) for lanyard length code number.

### Step 6. Select a Contact Type/Alternate Keying Position


P designates pin, S designates socket for normal positioning of contacts. When an alternate position of the connector is required to prevent cross-mating, a different letter (other than P or S) is used. See alternate positioning on page 27, then convert to Amphenol Commercial coding by the following chart.

| Pin Contacts |                 | Socket Contacts |                 |
|--------------|-----------------|-----------------|-----------------|
| MS Letter    | Amphenol letter | MS Letter       | Amphenol Letter |
| PN           | P (normal)      | SN              | S (normal)      |
| PA           | G               | SA              | H               |
| PB           | I               | SB              | J               |
| PC           | K               | SC              | L               |
| PD           | M               | SD              | N               |
| PE           | R               | SE              | T               |


## Lanyard Release Plug

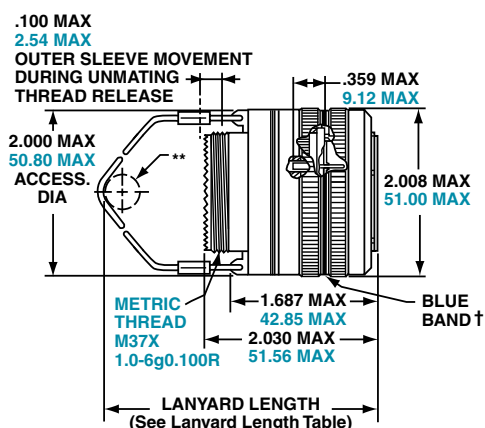PIN CONTACTS ONLY,  
SHELL SIZE 25 ONLY

TYPE 6

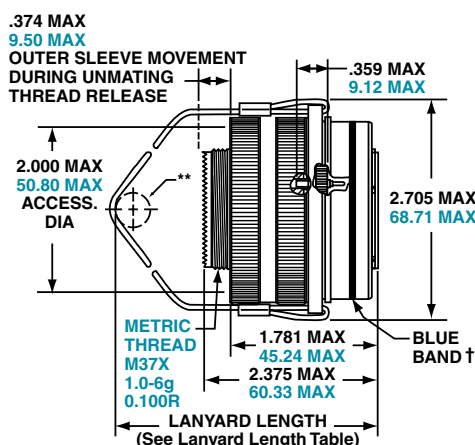

TYPE 2

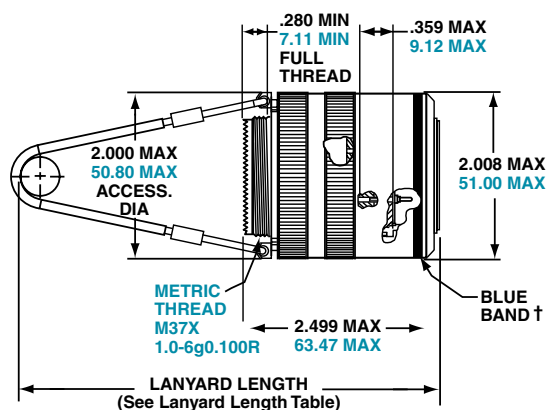TYPE 1  
(LONGER SHELL)

† Blue band indicates rear release contact retention system  
 \*\* Lanyard pulled taut against a .500 ± .13 dia. Mandrel  
 All dimensions for reference only

Pin Contact Data for MIL-STD-1760

| Insert Arrangement | Service Rating | Total Contacts | Contact |    |           |            |
|--------------------|----------------|----------------|---------|----|-----------|------------|
|                    |                |                | 20      | 16 | 12 (Coax) | 8 (Twinax) |
| 25-20              | N              | 30             | 10      | 13 | 4         | 3          |

Contacts for 25-20 Pattern

| Shell Size | Arrg. Number | Number of Contacts | Size Contacts | Service Rating | Contact Location                               | Standard Contacts               |                                 |
|------------|--------------|--------------------|---------------|----------------|------------------------------------------------|---------------------------------|---------------------------------|
|            |              |                    |               |                |                                                | Pin                             | Socket                          |
| 25         | -20          | 3                  | 8             | Twinax         | A, H, K                                        | M39029/90-529                   | M39029/91-530                   |
|            |              | 4                  | 12            | Coax           | 2,3<br>W, 5                                    | M39029/28-211<br>M39029/102-558 | M39029/75-416<br>M39029/103-559 |
|            |              | 13                 | 16            | N              | C, D, E, F,<br>J, M, N,<br>P, R, T, U,<br>Y, Z | M39029/58-364                   | M39029/56-352                   |
|            |              | 10                 | 20            | N              | B, G, L, S,<br>V, X, 1, 4,<br>6, 7             | M39029/58-363                   | M39029/56-351                   |

| Insert Arrangement | Service Rating | Total Contacts | Contact Size |            |
|--------------------|----------------|----------------|--------------|------------|
|                    |                |                | 20           | 10 (power) |
| 25-11              | N              | 11             | 2            | 9          |

\*Part number reference.  
 To complete, see how to order page 41.

D38999/31

88-555875/76 Type 6  
91-555875/7688-558518/19 Type 2  
91-558518/19


T3W-16B25-XXXX — Type 1

\*To order by Commercial Part numbers consult Amphenol.

Tri-Start Lanyard Separation Forces


| Shell Size | Straight Plug (lbs. max.) | 15 Degree Pull (lbs. max.) |
|------------|---------------------------|----------------------------|
| 25         | 90                        | 100                        |

INSERT AVAILABILITY  
 FAIL SAFE D38999/31  
 FOR MIL-STD-1760



25-20

Primary Interface Signal Set



25-11

Auxiliary Power Signal Set

Contact Legend: ● ⊕ ⊖ ⊗ ⊙  
 8 (twinax) 10 (power) 12 (coax) 16 20

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH  
SPEEDFiber  
OpticsContacts  
Connectors  
CablesEMI Filter  
Transient26482  
Matrix 2  
83723 III  
Matrix | Pyle26500  
Pyle5015  
Crimp Rear  
Release  
Matrix22992  
Class 1Back-  
ShellsOptions  
Others

38999

III

HD

Dualok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

HIGH  
SPEED

Fiber  
Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others

### HOW TO ORDER - BY MILITARY PART NUMBER FAIL SAFE D38999/31

Ordering procedure for example part number D38999/31WE20PN1 is shown below:

### Easy Steps to build a part number... Military

| 1.                | 2.                | 3.            | 4.                  | 5.                 | 6.            | 7.                        | 8.          |
|-------------------|-------------------|---------------|---------------------|--------------------|---------------|---------------------------|-------------|
| DOD Number Prefix | Spec Sheet Number | Service Class | Lanyard Length Code | Insert Arrangement | Contact Style | Alternate Keying Position | Type Number |
| D38999/           | 31                | W             | E                   | 20                 | P             | N                         | 1           |

#### 1. Select a DOD Number Prefix

|         | Designates                                     |
|---------|------------------------------------------------|
| D38999/ | MIL-DTL-38999, Series III Tri-Start Connectors |

#### 2. Specification Sheet Number

|    | Designates                                                         |
|----|--------------------------------------------------------------------|
| 31 | Designates Lanyard Release Plug for MIL-STD-1760 with pin contacts |

#### 3. Select a Service Class

|   | Designates                                                                                                                           |
|---|--------------------------------------------------------------------------------------------------------------------------------------|
| F | Electroless nickel plated aluminum, optimum EMI shielding effectiveness –65dB @ 10 GHz specification min., 48 hour salt spray, 200°C |
| W | Corrosion resistant olive drab cadmium plate aluminum, 500 hour extended salt spray, EMI –50dB @ 10 GHz specification min., 175°C    |

#### 4. Select a Lanyard Length Code

| Lanyard Length (in.) ±.236 | Lanyard Length (mm.) ± 6.0 | Lanyard Length Code for Part Number |
|----------------------------|----------------------------|-------------------------------------|
| 6.024                      | 153.0                      | E                                   |
| 6.535                      | 166.0                      | F                                   |
| 7.008                      | 178.0                      | G                                   |
| 7.520                      | 191.0                      | H                                   |
| 7.992                      | 203.0                      | I                                   |
| 8.504                      | 216.0                      | J                                   |
| 9.016                      | 229.0                      | K                                   |
| 9.528                      | 242.0                      | L                                   |

#### 5. Select an Insert Arrangement

Only 11 or 20 are available contact arrangement numbers. See page 43.

#### 6. Contact Style – P & A are Valid Options

|   | Designates                                                                                          |
|---|-----------------------------------------------------------------------------------------------------|
| P | Replaces the “no designation” option in the PIN on revision C and earlier revision of the Mil-Spec. |
| A | Designates supplied less contacts.                                                                  |

#### 7. Alternate Keying Position

|   | Designates                       |
|---|----------------------------------|
| N | Is required for normal position. |

#### 8. Type Number

Type 1, 2 or 6. See drawings on page 43.

For accessories for lanyard release plugs see Accessories section.

# D38999 Type Hybrid Breakaway – Series III

## Lower Profile Lanyard Release Plug, Crimp,

## Metal shells with Composite Operating Sleeve

**New Hybrid Lanyard Breakaway Fail Safe connector with a composite thermoplastic outer operating sleeve for greater durability.**

This new hybrid breakaway is the breakaway of choice for the Navy F-18 Program. Amphenol's hybrid lanyard design offers greater durability over D38999 aluminum and composite designs because of its ability to handle abuse taken after weapons release.

Other advantages include:

- Lower profile compared to full metal breakaway Fail Safe connectors
- Less weight

This Hybrid Breakaway meets the applicable requirements of MIL-DTL-38999/31 including random & sine vibration, ice resistance, fluid immersion and hydrolytic stability tests. (Test reports are available upon request).

Currently the hybrid breakaway is available in shell sizes 25 and 17. It uses standard inserts available for breakaway plugs sizes 25 and 17, and is also available with inserts 25-20 and 25-11 for MIL-STD-1760. Consult Amphenol Aerospace for ordering of the new hybrid breakaway connectors. These hybrid connectors will accommodate the standard backshells for breakaway connectors shown on Accessories section or the backshell section.



**New Hybrid Lanyard Release Plugs  
(Metal inside shells and Composite,  
lower profile outer sleeves)**

| Condition/Test             | Description                                                                                                                     | Reference                |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Durability                 | 400 complete mating/unmating cycles                                                                                             | MIL-DTL-38999/31D        |
| High Impact Shock          | Nine hammer blows from 1,3 and 5 feet, three each in three axes on mounting panel.                                              | MIL-S- 901D              |
| Vibration                  | 10 to 2000Hz in three perpendicular axes, 4 hours in each axis for a total of 12 hours with no fracturing or breaking of parts. | MIL-STD-202F, Method 204 |
| Ice Resistance             | Pull tested after conditioned with Ice water at -18C for 35 minutes.                                                            | MIL-DTL-38999/31D        |
| Fail Safe Disengagement    | Rotationally unmated 180° from full mate position and pull tested in both a straight direction and at 15°.                      | MIL-DTL-38999/31D        |
| High Speed Pull Separation | 100 cycles at 30 feet per second.                                                                                               | MIL-DTL-38999/31D        |

## Stores Management Type II, Rail Launch Plugs and Receptacles that meet MIL-STD-1760

**Amphenol provides a Breakaway Rail Launch connector that is designed for use on aircraft that carry rail launch missiles such as AMRAAM.**

These connectors are designed for blindmating of stores on rail launch applications. They consist of a buffer plug and a missile receptacle that meet the specifications of MIL-STD-1760 Stores Management.

Other features and benefits include:

- Designed to MIL-C-83538 specifications
- Bayonet and push pull coupling
- Use standard MIL-DTL-38999 crimp termination with power, coax and twinax contacts also available
- Buffer provides flame barrier
- Buffers are replaceable

Consult Amphenol Aerospace for more information and ordering.



**Stores Management Type II  
Rail Launch Connectors**

**38999**

III

HD

Duallok

II

I

SJT

Accessories

Aquacon

Herm/Seal

PCB

**HIGH  
SPEED**

Fiber  
Optics

Contacts  
Connectors  
Cables

EMI Filter  
Transient

26482  
Matrix 2

83723 III  
Matrix | Pyle

26500  
Pyle

5015  
Crimp Rear  
Release  
Matrix

22992  
Class I

Back-  
Shells

Options  
Others