




Features

- Economical method of storing static sensitive electronics devices
- Wide choice of sizes
- When reclosable cover is closed, the "Faraday Cage" effect restricts electrostatic charges to exterior of box
- Shipped knocked-down; easy to assemble

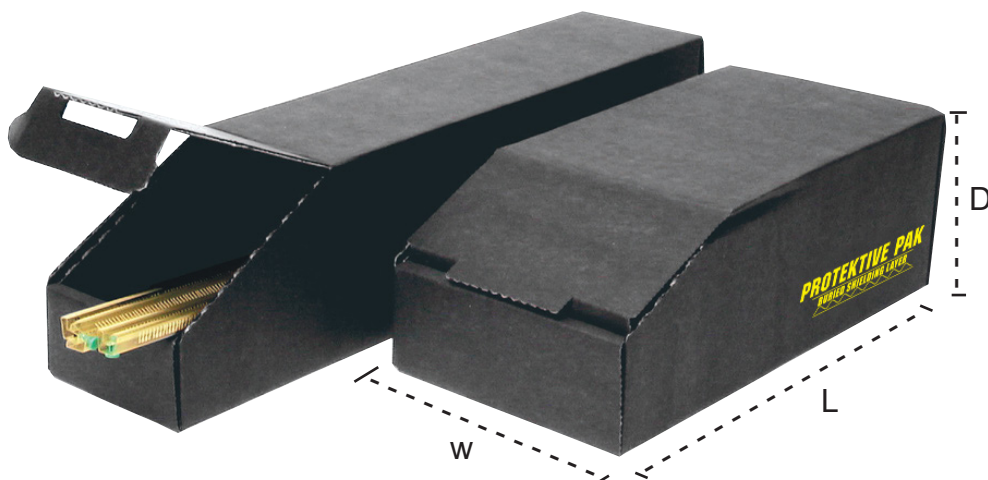

Item No.	Size O.D. - L x W x D	Item No.	Size O.D. - L x W x D
37590	12 x 4 x 4-1/2	37594	18 x 6 x 4-1/2
37591	12 x 6 x 4-1/2	37598•	24-3/4 x 2 x 4-1/2
37599•	12 x 8 x 4-1/2	37595	24-3/4 x 4 x 4-1/2
37592	12 x 12 x 4-1/2	37596	24-3/4 x 6 x 4-1/2
37593	18 x 4 x 4-1/2	37597•	24-3/4 x 8 x 4-1/2

• These items are made to order

Meets the required limits of ANSI/ESD S20.20, and Packaging standard ANSI/ESD S541.

SPECIFICATIONS

Properties

Surface Resistance

Discharge Shielding

Sloughing Test

Recyclability

Typical Values

1×10^6 to $< 1 \times 10^9$ ohms

<10 nJ

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD STM11.11

ANSI/ESD STM 11.31

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

RoHS, REACH, and Conflict Minerals Statement

See the Desco Industries RoHS, Reach, and Conflic Minerals Statement: <http://www.descoindustries.com/ROHS.aspx>

See the Protektive Pak Limited Warranty:

<http://protektivepak.descoindustries.com/Limited-Warranty.aspx>

Specifications and procedures subject to change without notice



Made in the
United States of America

CLOSED BIN BOXES

PROTEKTIVE PAK

13520 MONTE VISTA AVENUE, CHINO, CA 91710

PHONE (909) 627-2578

ProtektivePak.com

DRAWING NUMBER

37590

DATE:

December
2024

PROTEKTIVE PAK
BURIED SHIELDING LAYER

Unless otherwise noted, tolerance is $\pm 10\%$