
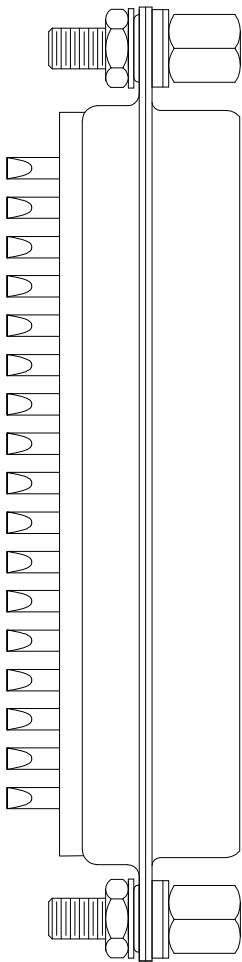


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN IN THE FORM OF A DESIGN, THE USER ASSUMES ALL RESPONSIBILITY FOR THE DESIGN AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10745

DATE	REV	REVISION/RECORD	APP	DR	CK
7-30-09	NC	ECO 31054	RCW	BS	COLF

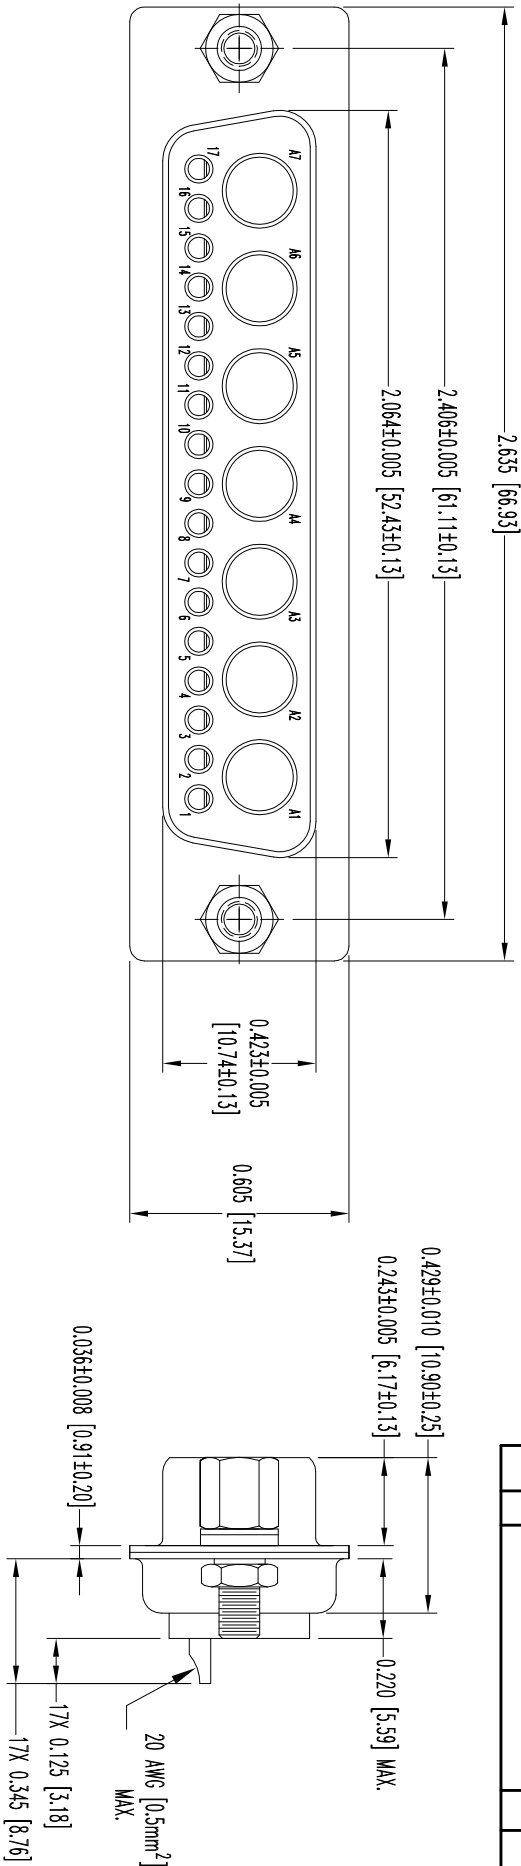

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.

CONTACTS: PRECISION MACHINED BRASS ALLOY WITH BERYLLIUM COPPER CLIP, 0.000050 [1.25µ] GOLD OVER NICKEL PLATE.

SHELS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

HEX NUTS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

LOCKWASHERS: BRONZE, ZINC PLATE WITH CHROMATE SEAL.

WASHERS: STAINLESS STEEL, PASSIVATED.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 7.5 AMPERES NOMINAL.

INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.

INSULATOR RESISTANCE: 5 G OHMS.

WORKING VOLTAGE: 300 V r.m.s.

3. TEMPERATURE RANGE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC
INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.

± 0.015 [0.38]

SCALE

N.T.S.

DRAWN BY

B SHELLBOY

APPROVED BY

R WILLIAMS

CBM SERIES

N.T.S.

DRAWN BY

B SHELLBOY

APPROVED BY

R WILLIAMS

TITLE

CBM24W7S200T20

DATE

7-30-09

DRAWING NUMBER

SK10745

REV.

NC