
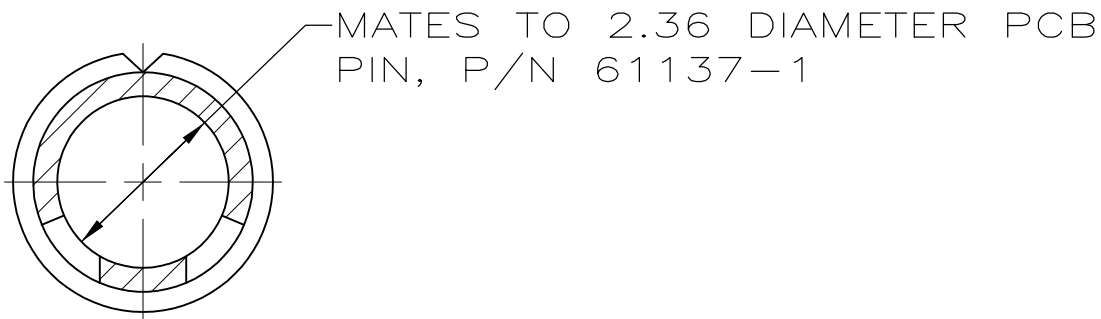


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	52		L2	REVISED PER ECO-11-004917	11MAR11	RK



APVD	HMR
------	-----

1. WIRE RANGE: 0.3 - 0.9 MM² (22 - 18 AWG)
2. INSULATION RANGE: 1.52 - 2.79
- 3


 REVERSE REEL OF PART NUMBER 61291-5.

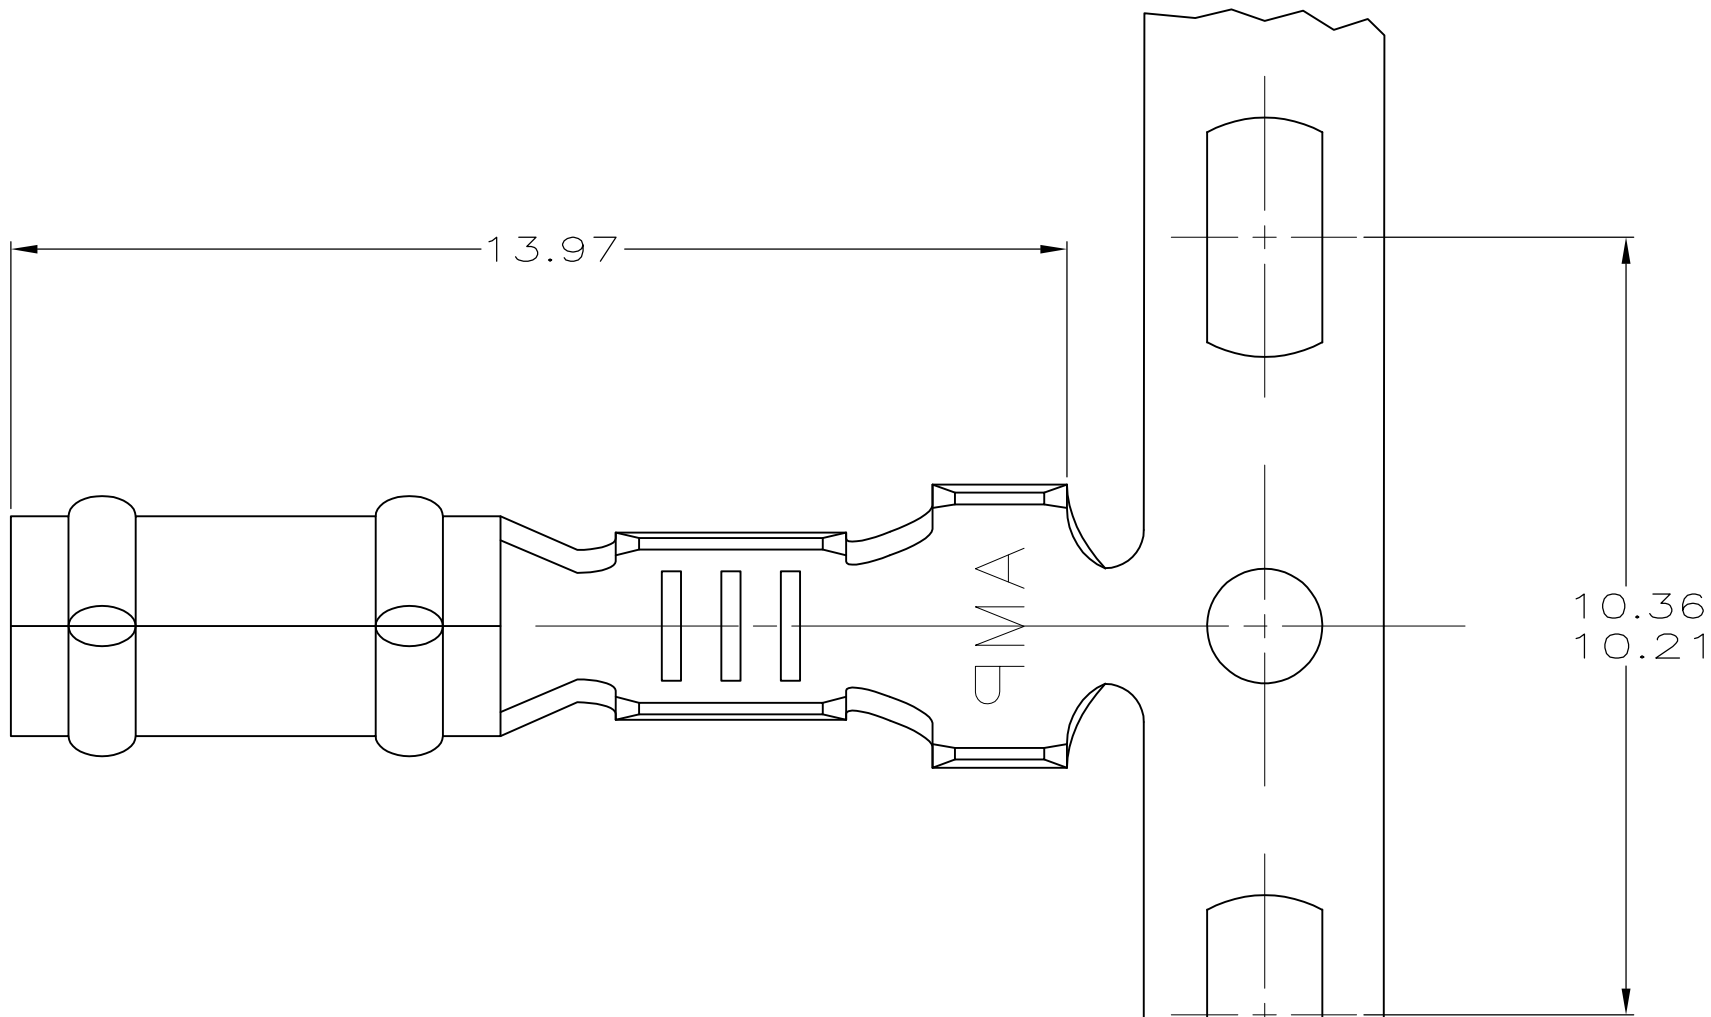

SECTION A-A

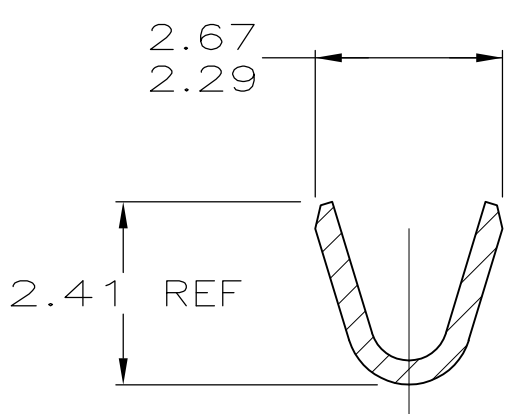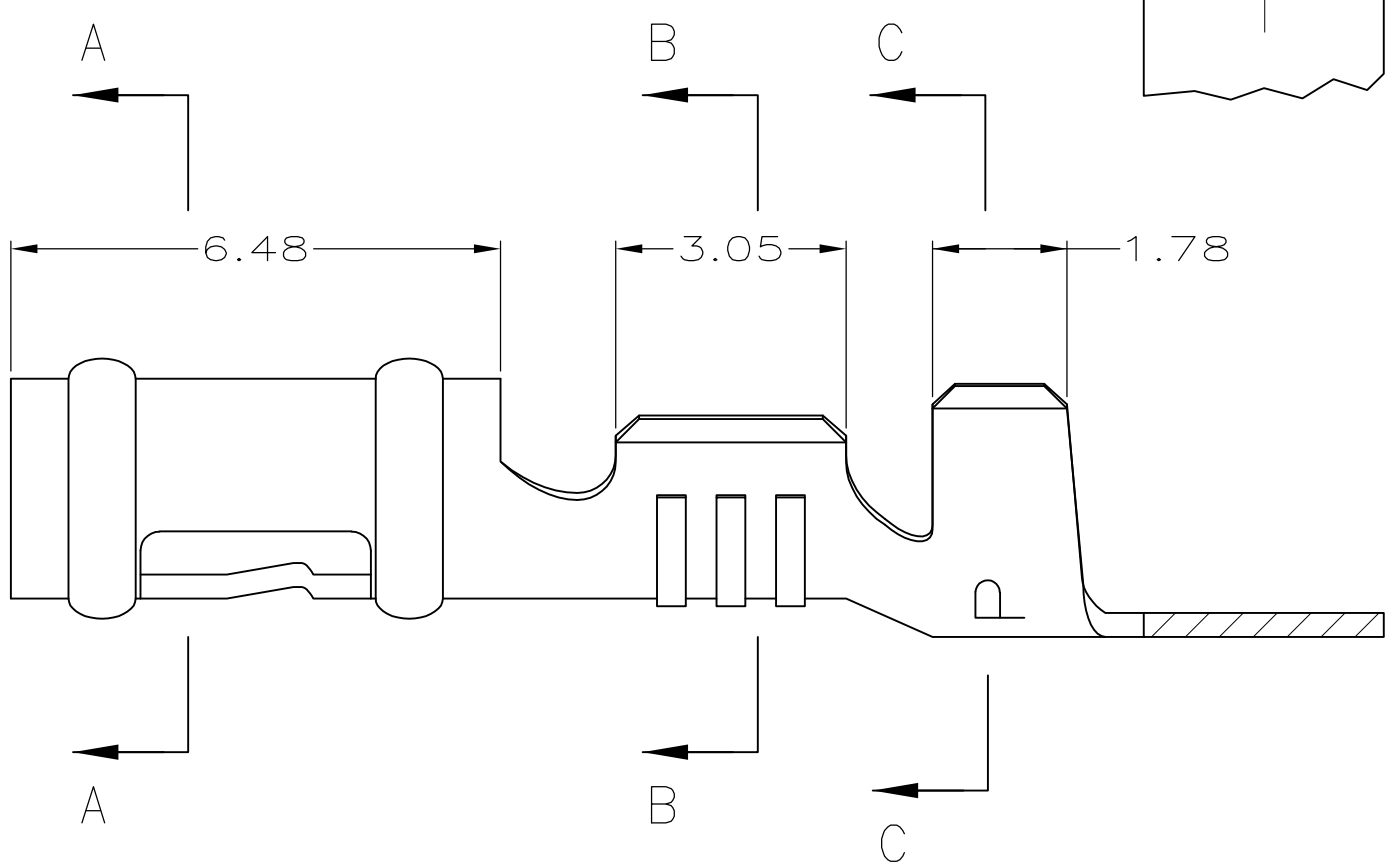

SECTION B-B

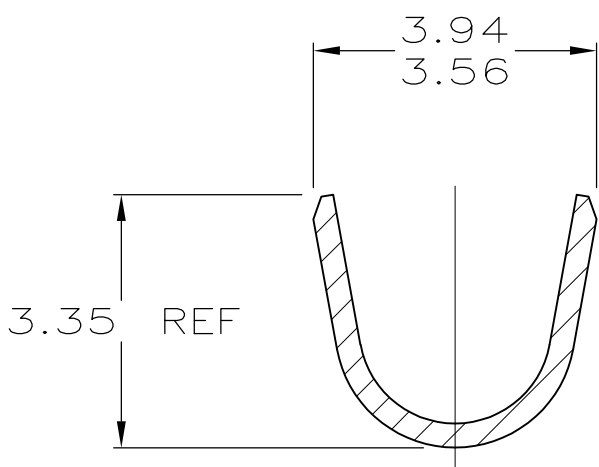


SECTION C-C

61291-5
61291-1
PART NUMBER

2.29	.090	3.05	.120	10.21	.402	-	-
1.78	.070	2.79	.110	6.48	.255	-	-
1.52	.060	2.67	.105	3.94	.155	-	-
0.32	.013	2.41	.095	3.56	.140	13.97	.550
0.13	.005	2.36	.093	3.35	.132	10.36	.408
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

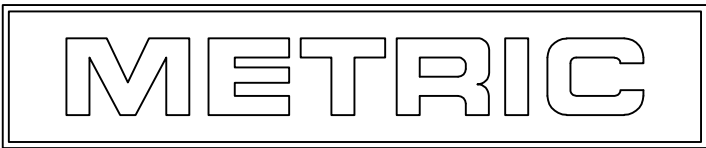

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	6-16-97	TE Connectivity		
				CHK	6-16-97			
				APVD	8-22-97	NAME RECEPTACLE, .093 DIAMETER, 22-18 AWG, .060-.110 INSULATION, P.C. CONTACT		
				PRODUCT SPEC				
				APPLICATION SPEC		SIZE A2		
				WEIGHT	-			
				CUSTOMER DRAWING		CAGE CODE	DRAWING NO	RESTRICTED TO
						00779	C-61291	-
						SCALE	SHEET	REV
						10:1	1 of 1	L2