
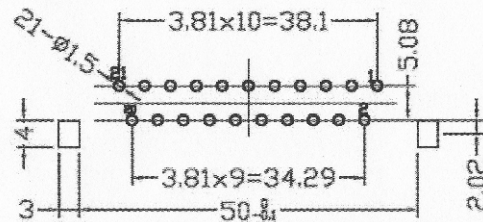
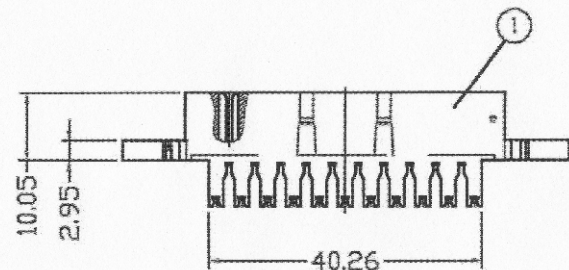



Artikel-Nr.: 741744

Bez.: Scart-Einbaubuchse, Winkelausführung

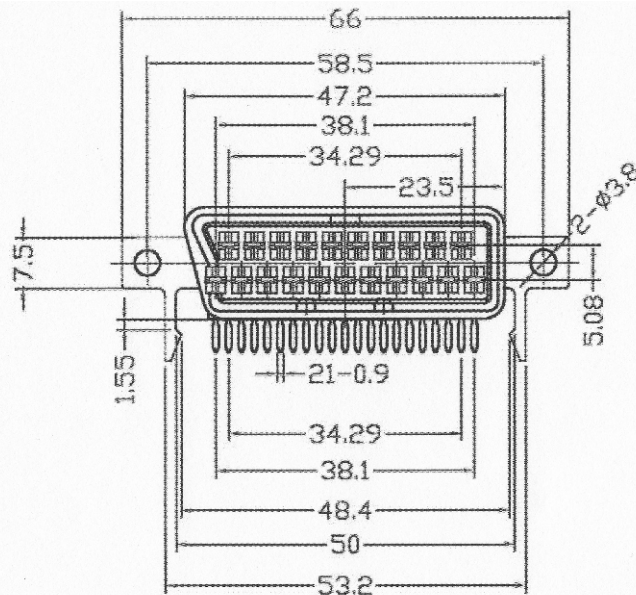

PCB HOLE PATTERN

MATERIAL:

- A. INSULATOR:PC (94V 2)
- B. CONTACT:BRASS
- C. CONTACT PLATED:TIN PLATED

SPECIFICATION:

- A. CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:

- A. (BRASS) 25mΩ max
25mΩ max)
- B. INSULATOR RESISTANCE:5000MΩ AT100V DC1Min
5000MΩ AT100V DC1Min)
- C. dielectric withstanding:350Var 1Min
350Var 1Min)

Notation:

- 1. Conform HSFstandard
- 2. Have "@" symbol for the quality focus of measurement

2	90°	CY-SC-PA006	
1	90°66	CY-SC-PA172	PC
NO.	PART NAME	PAR TDESIGN NO.	MATERIAL

www.bkl-electronic.de

Technische Änderungen vorbehalten. Ausführungen können variieren. Sollten Sie ein Muster benötigen kontaktieren Sie uns bitte.

BKL-ELECTRONIC Kreimendahl GmbH • Märkenstück 14 • 58509 Lüdenschaid

Tel: +49 (0)2351-3621-0 • Fax: +49 (0)2351-3621-29 • info@bkl-electronic.de

