

Clock Oscillators (SMD)




K50-HC Series (5.0V)

K50 SERIES



DIMENSIONS

millimeters (inches)

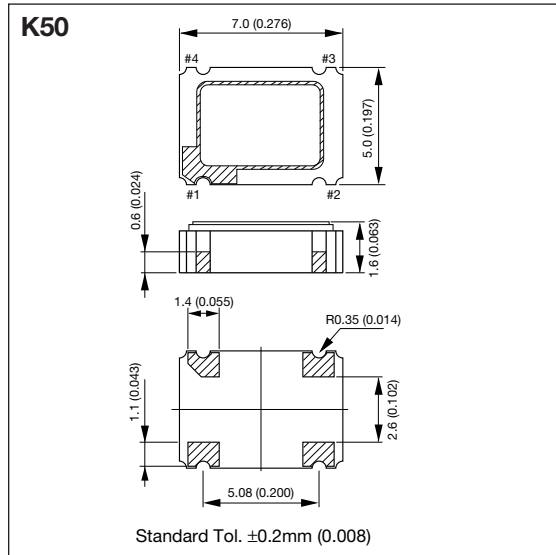

PIN CONNECTION

Pin #	Function
1	CONTROL
2	CASE GND
3	OUTPUT
4	+V _{CC}

ENABLE/DISABLE

Pin #1	Pin #3
"H" or Open	Oscillation
"L"	High Impedance

SPECIFICATIONS

Items	Code	Rating	Unit	Remarks
Output Frequency	F _{OUT}	8 to 68	MHz	—
Frequency Tolerance	$\Delta F/F$	± 100 , ± 50	ppm	Over all conditions
Aging	$\Delta F/F$	± 5	ppm/y	@ 25°C
Operating Temperature	T _{OPR}	-10 to 70	°C	—
Storage Temperature	T _{STR}	-55 to 125	°C	—
Supply Voltage	V _{CC}	5 ± 0.5	V	—
Supply Current	I _{CC}	50 max.	mA	Loaded @ 68MHz
Disable Current	I _{DE}	30 max.	mA	—
Duty Ratio	SYM	45 to 55	%	0.5V _{CC} DC Level
Output 0 Level	V _{OL}	0.1 V _{CC} max.	V	I _{OL} = 16mA
Output 1 Level	V _{OH}	0.9 V _{CC} min.	V	I _{OH} = -16mA
Rise/Fall Time	T _R , T _F	10 max.	nsec	0.1V _{CC} -0.9V _{CC}
Load Capacitance	C _L	50 max.	pF	F > 50MHz C _L = 15pF (max.)
Enable/Disable Time	—	100 max.	nsec	—
Input Voltage Low	V _{IL}	0.8 max.	V	—
Input Voltage High	V _{IH}	2.2 min.	V	—
Start-up Time	ST	10 max.	mS	Minimum Operating Voltage to be 0sec

FEATURES

- High reliable SMD ceramic package
- Frequency range = 8MHz to 68MHz
- Frequency tolerance = $\pm 100\text{ppm}$, $\pm 50\text{ppm}$
- Tristate output inhibit

APPLICATIONS

- Routers
- Switches
- Servers

HOW TO ORDER

K50 - HC 1 C S E 40.0000M R

Series

Tolerance
1 = $\pm 100\text{ppm}$
0 = $\pm 50\text{ppm}$

Packaging

R = Tape and reel,
1,000 pcs/reel

Frequency (MHz)

8.0000	27.0000	49.1520
14.31818	29.4989	50.0000
16.0000	30.0000	60.0000
20.0000	32.0000	64.0000
24.0000	33.8688	66.6667
24.5760	40.0000	—
25.0000	48.0000	—

Tristate Output

E = with function (STD)

Duty Ratio

S = 45% to 55% (STD)

Output

C = CMOS/Compatibility

*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.


Clock Oscillators

K30/K50 Series




Kyocera has a wide range of clock oscillators with frequency and package size to match the various customer requirements.


K50/K30 HC SERIES TEST CIRCUIT

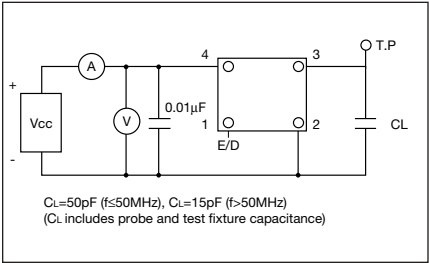


K50/K30 3C SERIES TEST CIRCUIT

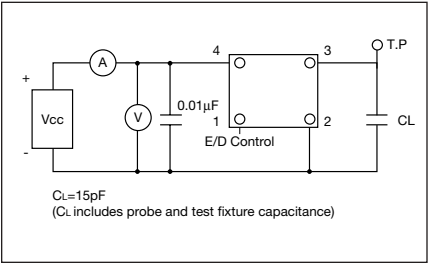

K50H 3C SERIES TEST CIRCUIT

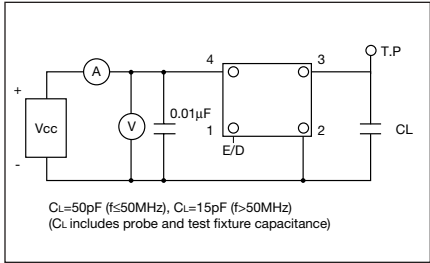

OUTPUT WAVE FORM FOR ALL SERIES

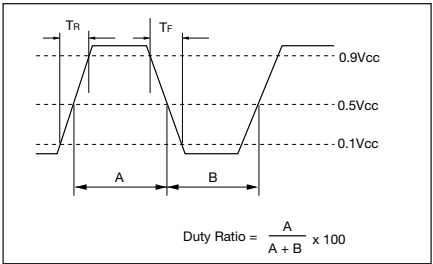

SPECIFICATIONS

Type	Frequency Range (MHz)	Load	Drive Level	Duty Ratio	Features
K50-HC	8 to 68	$C_L=50\text{pF}$ (max.) ($f \leq 50\text{MHz}$)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	45/55% (0.5Vcc)	1. IR Reflowable 2. Mini-SMD 3. Tristate Output, Enable/Disable Function F>50MHz $C_L=15\text{pF}$
K50-3C	8 to 80	$C_L=15\text{pF}$ (max.)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	40/60% (0.5Vcc)	1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function
K50H-3C	50 to 160	$C_L=15\text{pF}$ (max.)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	45/55% (0.5Vcc)	1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function
K30-HC	8 to 50	$C_L=50\text{pF}$ (max.) ($f \leq 50\text{MHz}$)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	45/55% (0.5Vcc)	1. IR Reflowable 2. Mini-SMD 3. Tristate Output, Enable/Disable Function
K30-3C	8 to 67	$C_L=15\text{pF}$ (max.)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	40/60% (0.5Vcc)	1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function

Figure 1 is a schematic diagram of a four-hole plate. The plate has a total width of 5.08 (0.200) and a total height of 4.2 (0.165). The holes are arranged in a 2x2 grid. The distance between the centers of the holes in the horizontal direction is 1.8 (0.071), and the distance in the vertical direction is 2.0 (0.079). The holes are represented by squares with diagonal hatching.

Temp
°C

255
±5

150
±10

10sec. max

peak 260°C max

Over 230°C
30 to 40sec.

150 to 180°C
90 to 120sec.

Time - sec.

Technical drawing of a Reel, showing three views: front view, side view, and end view.

Front View: A circular reel with four spokes. The overall diameter is $\phi 180$ (7.087). The distance from the center to the tip of a spoke is $R125$ (4.921). A rectangular feature is located at the bottom center, with a label "Part Number Indication" pointing to it.

Side View: Shows the profile of the reel. The total height is 19.5 (0.768). The distance from the base to the center of the reel is 60 (2.362). The base width is 17.0 (0.669).

End View: Shows the circular end of the reel. The diameter is $\phi 130$ (5.12). The distance from the center to the edge of the reel is $R125$ (4.921). The distance from the center to the edge of the base is 21.0 (0.827). The distance from the center to the edge of the reel is 2.0 (0.079).

Diagram of a KYOCERA 32.0000 crystal oscillator package. The package is a rectangular component with four pins labeled 1, 2, 3, and 4. The top surface features the KYOCERA logo, the frequency value 32.0000, and the markings 1B and W01. Labels with leader lines point to the following features:

- PIN #1 Indication:** Points to the notch on the left side of the package.
- *1 Tolerance:** Points to the marking 1B.
- Series *2:** Points to the marking W01.
- Lot No.:** Points to the marking W01.
- Output Frequency:** Points to the frequency value 32.0000.

Specifications:

*1 $1 = \pm 100\text{ppm}$
 $0 = \pm 50\text{ppm}$
 $S = \pm 30\text{ppm}$
 $U = \pm 25\text{ppm}$

*2 $B = K50\text{-HC}$
 $L = K50\text{-3C-E}$
 $M = K50\text{-3C-SE}$
 $D = K50\text{-CL}$
 $H = K50H\text{-3C-SE}$

Technical drawing of a Carrier Tape, showing dimensions in inches (mm).

Top View Dimensions:

- Overall width: 16.0 (6.30)
- Overall length: 5.40 (0.213)
- Distance between mounting holes: 8.0 (0.315)
- Distance between mounting holes: 4.0 (0.157)
- Mounting hole diameter: $\phi 1.5$ (0.059)
- Radius: $\phi 1.55$ (0.061)R
- Distance from edge to mounting hole center: 1.75 (0.069)
- Distance from edge to mounting hole center: 7.5 (0.295)

Side View Dimensions:

- Overall height: 7.4 (0.291)
- Distance from edge to mounting hole center: 2.2 (0.087)
- Distance from edge to mounting hole center: 0.3 (0.012)

1,000pcs/Reel

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[K50-HC0CSE59.6000MR](#)