
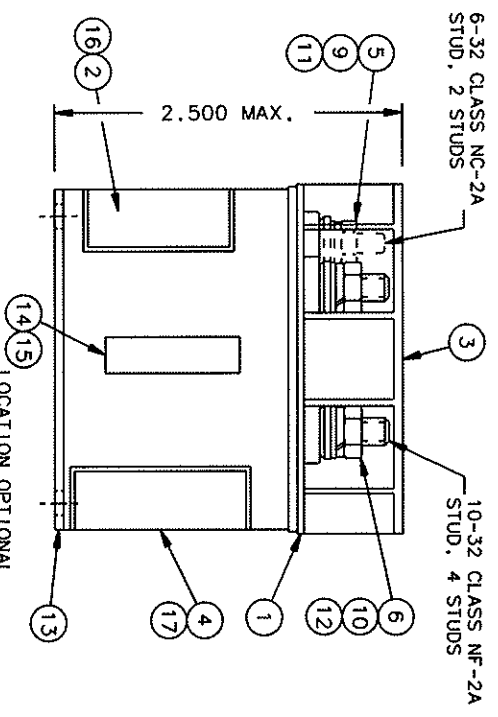
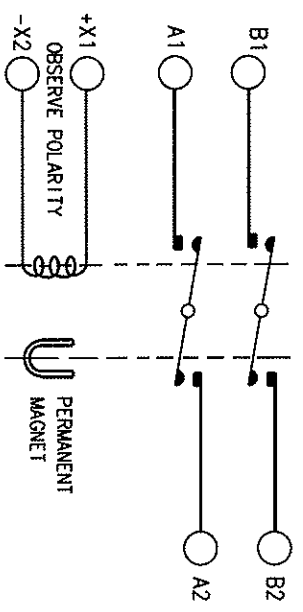


FAA/PMA

REVISIONS			RELEASED		REV. N
REV.	DESCRIPTION	DATE	APPROVED	DATE	
K	25321 UPDATE FRONT VIEW (REF. ITEMS 16, 17)	94/01/03	WS		
L	253701 UPDATE P/L: CORRECTED GEOMETRY	94/01/07	WS		
M	33500 FIND NO 18 ADDED	97/07/11	RS		
N	350921 FIND NO 18 P/N WAS 51702-204	98/03/16	RS		

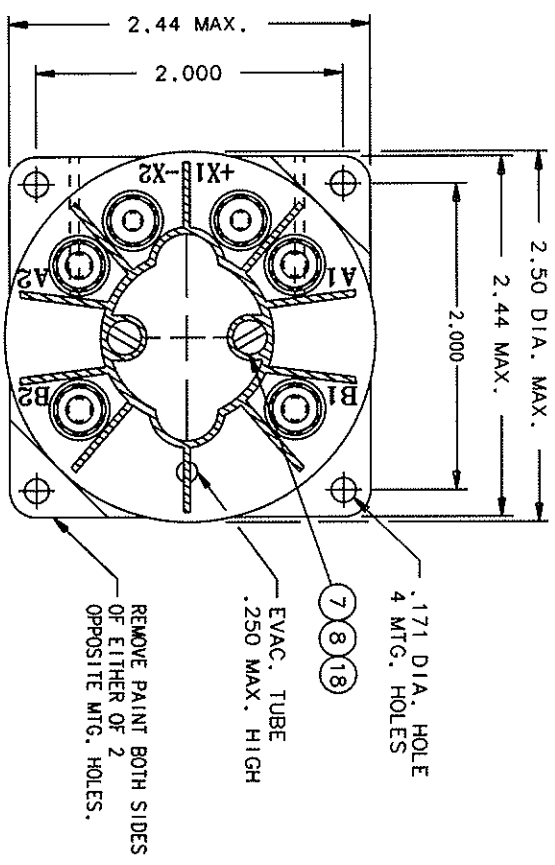

CONSTRUCTION
CONTACTS
CONTACT RATING
COIL CURRENT AT
NOMINAL 28 V.D.C.
COIL RATING
PICKUP
DROPOUT
RATED DUTY
ALTITUDE
MAX. WEIGHT
MAX. OPERATING AMBIENT TEMP.

HERMETICALLY SEALED
2PST NO DOUBLE BREAK
50 AMP. 28 VOLT RES.
0.14 AMP. AT 25°C.
28 VDC
18 V MAX. HOT
7 VOLTS -5.5
CONTINUOUS
50,000 FT.
11.5 OZ.
71°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		HARTMAN ELECTRICAL MANUFACTURING MAANSFIELD, OHIO	
2 PL DEC. 2 PL DEC. ANGLES	1.030 ± .010	DR BY RLS 98/03/30	CONTACTOR - 2PST
1.030 ± .010	± .1°	CHK BY KCS 98/03/30	HERMETICALLY SEALED
MATERIAL		ENG BY DLR 98/04/01	
		RELEASE BY 98/04/01	
		CONTR NO.	SIZE CODE IDENT DWG NO.
		GOVT APPVL	C 74063 DH-7MN
			SCALE NONE SHEET
			1093

REV.	DESCRIPTION	DATE	APPROVED
18	51701-180 WASHER - 3/16 X .103 X .015		MYLAR
17	1 39529-002 OVERLAY - WIRING DIAGRAM		
16	1 39529-001 OVERLAY - NAMEPLATE		
15	1 39529-024 OVERLAY		
14	1 58400-099 PLATE - FAA/PMA		
13	1 20223-010 PRIMARY ASSEMBLY		
12	4 51702-844 WASHER - 3/8 X 13/64 X .032 FLAT		BRASS
11	2 51702-204 WASHER - 3/8 X 9/64 X .032 FLAT		BRASS
10	4 51810-054 WASHER - LOCK NO. 10 SPLIT		AN935-B10 BRONZE
9	2 51806-014 WASHER - LOCK NO. 6 SPLIT		AN935-B6 BRONZE
8	2 51805-011 WASHER - NO. 5 SPLIT		AN935B5L BRONZE
7	2 51205-591 SCREW - 5-40 X 3/8 RD. HD.		BRASS
6	4 50410-054 NUT - 10-32 X 5/16 X 9/64 HEX.		BRASS
5	2 50406-034 NUT - 6-32 X 1/4 X 5/64 HEX.		BRASS
4	1 20265-001 PLATE - WIRING DIAGRAM		
3	1 15549-001 SHIELD - TERMINAL		
2	1 16043-001 PLATE - NAME		
1	1 15537-036 PLATE - BASE COVER		
FIND NO	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	PSOM NO
REV	IDENTIFYING NO	DESCRIPTION	DRAWING OR SPECIFICATION
			MATERIAL OR NOTE