


EXSC – Embedded & Wirebond Extreme Temperature Silicon Capacitor

Rev 3.6

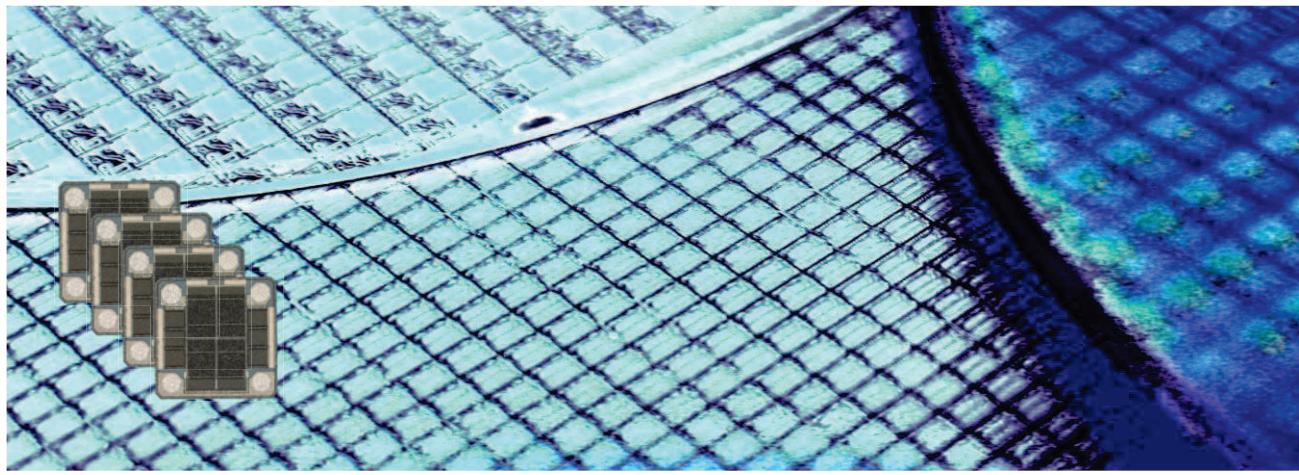

Key features

- Ultra High Operating temperature up to 250°C
- Low profile (250µm)
- High stability of capacitance value:
 - ◆ Temperature <1,5% (-55°C to +250°C)
 - ◆ Voltage <0.1%/Volts
 - ◆ Negligible capacitance loss through ageing
- Low leakage current down to 100pA
- High reliability
- Aluminum Pad finishing

Thanks to the unique IPDiA Silicon capacitor technology, most of the problems encountered in demanding applications can be solved.

Embedded EXtreme Temperature Silicon Capacitors are dedicated to applications where **reliability** up to **250°C** is the main parameter.

EXSC are the most appropriate solution for Chip On Board, Chip On Foil, Chip On Glass, Chip On Ceramic, flip chip and embedded applications.

This technology features a capacitor integration capability (up to 250nF/mm²) which offers capacitance value similar to X8R dielectric, but with better electrical performances than C0G/NP0 dielectrics, up to 250°C.

Key applications

- All applications up to 250°C, such as downhole and defense industries
- High reliability applications
- Replacement of X8R and C0G dielectrics
- Decoupling / Filtering / Charge pump (i.e.: motor management, temperature sensors)
- Downsizing

EXSC provide the highest capacitor **stability** over the full -55°C/+250°C temperature range in the market with a **TC<1,5%**.

The IPDiA technology offers industry leading performances relative to **failure rate** with a **FIT<0,017**.

This technology also offers **high reliability**, up to 10 times better than alternative capacitor technologies, such as Tantalum or MLCC, and eliminates cracking phenomena.

This Silicon based technology is ROHS compliant and compatible with lead free reflow soldering process.

Electrical specification

		Capacitance value						Parameters		Value			
		10	15	22	33	39	47	68					
Unit	10pF	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	390pF/0202/30V 935 125 72C 339	470pF/0202/30V 935 125 72C 347	680pF/0202/30V 935 125 72C 368	Capacitance range		390pF to 4.7μF ^(*)		
	0.1nF	1nF/0202/30V 935 125 72C 410	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	33nF/0404/30V 935 125 72F 533	Contact IPDIA Sales	Contact IPDIA Sales	Capacitance tolerances		±15% ^(*)		
	1nF	10nF/0202/30V 935 125 72C 510	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Operating temperature range		-55 to 250 °C		
	10nF	100nF/0404/11V 935 125 42F 610	Contact IPDIA Sales	220nF/0505/11V 935 125 42H 622	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Contact IPDIA Sales	Storage temperatures		-70 to 265 °C		
	0.1μF	1μF/1208/11V 935 125 42S 710	Contact IPDIA Sales	2.2μF/1612/11V 935 125 42V 722	3.3μF/1616/11V 935 125 42Y 733	Contact IPDIA Sales	4.7μF/2016/11V 935 125 42X 747		Temperature coefficient		±1,5%, from -55 to +250°C		
(*) Other values on request													
Breakdown Voltage (BV)													
Capacitance variation versus RVDC													
Equivalent Serial Inductor (ESL)													
Equivalent Serial Resistor (ESR)													
Insulation resistance													
Aging													
Reliability													
Capacitor height													

(*) Other values on request

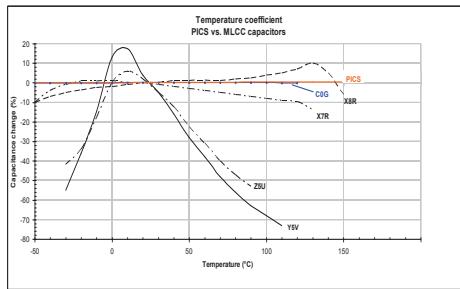


Fig.1: Capacitance change versus temperature variation compared to alternative technologies

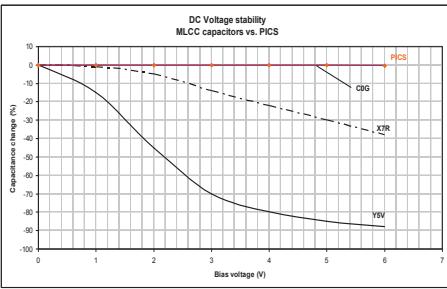


Fig.2 Capacitance change versus voltage variation compared to alternative

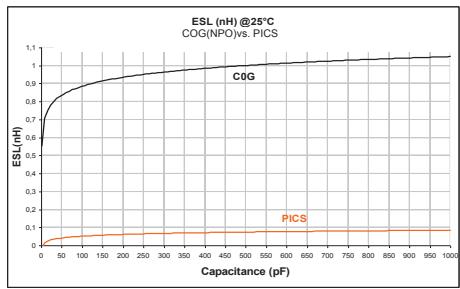


Fig.3 ESL versus capacitance value compared to alternative technologies

Part Number

935.125.

B.2.

S.

U

XX → Value

i.e: 100nF/0404 → 935 125 42F 610

Breakdown Voltage
4 = 11V
7 = 30VSize
F = 0404
H = 0505
I = 0302
S = 1208
V = 1216Unit
0 = 10 f
1 = 0.1 p
2 = 1 p
3 = 10 p
4 = 0.1 n0 = 1 n
6 = 10 n
7 = 0.1 μ
8 = 1 μ
9 = 10 μ

Termination

Pad finishing in Aluminum (3μm thickness +/-10%).

Applicable for almost all embedded applications.

Parts should be glued with non conductive paste. If conductive glue is used on the backside of the silicon cap, it is strongly recommended to connect the backside and pads 3&4 to the same level (GND preferred).

Pinning definition & Outline

pin #	Symbol	Description
1, 2	Signal	Signal
3, 4	GND	Ground

Typ.	0202	0302	0303	0404	0505	0605	1208	1612	1616	2016
Comp. size	A 0.58 ±0.05	0.80 ±0.05	0.80 ±0.05	1.00 ±0.05	1.25 ±0.05	1.50 ±0.05	3.00 ±0.05	4.00 ±0.05	4.00 ±0.05	5.00 ±0.05
	B 0.58 ±0.05	0.64 ±0.05	0.80 ±0.05	1.00 ±0.05	1.25 ±0.05	1.25 ±0.05	2.00 ±0.05	3.00 ±0.05	4.00 ±0.05	4.00 ±0.05
	C 0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	d 0.3	0.52	0.52	0.72	0.97	1.22	2.72	3.72	3.72	4.72
	e 0.3	0.36	0.58	0.72	0.97	1.22	1.72	2.72	3.72	3.72

Packaging

Tape and reel, tray, waffle pack or wafer delivery.

Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.



For more information, please visit: <http://www.ipdia.com>
To contact us, email to: sales@ipdia.com

Date of release: 28th February 2014
Document identifier : CL xxxxxxxxx



IPD Capacitor Assembly Set Up

Rev 1.0

Application Note


Outline

Silicon Capacitor for surface mounting device (SMD) assembly is a Wafer Level Chip Scale Packaging with the following features:

- Package dedicated to solve tombstoning effect of small SMD package;
- Package compatible with SMD assembly;
- Package without underfilling step;
- Interconnect available with various optional finishing for specific assembly.

Assembly consideration

- Standard pick & place equipment dedicated to WLCSP down to 400 μ m pitch.
- Solder paste type 3 in most cases of EIA size.
- Reflow has to be done with standard lead-free profile (for SAC alloys) or according to JEDEC recommendations J-STD 020D-01.

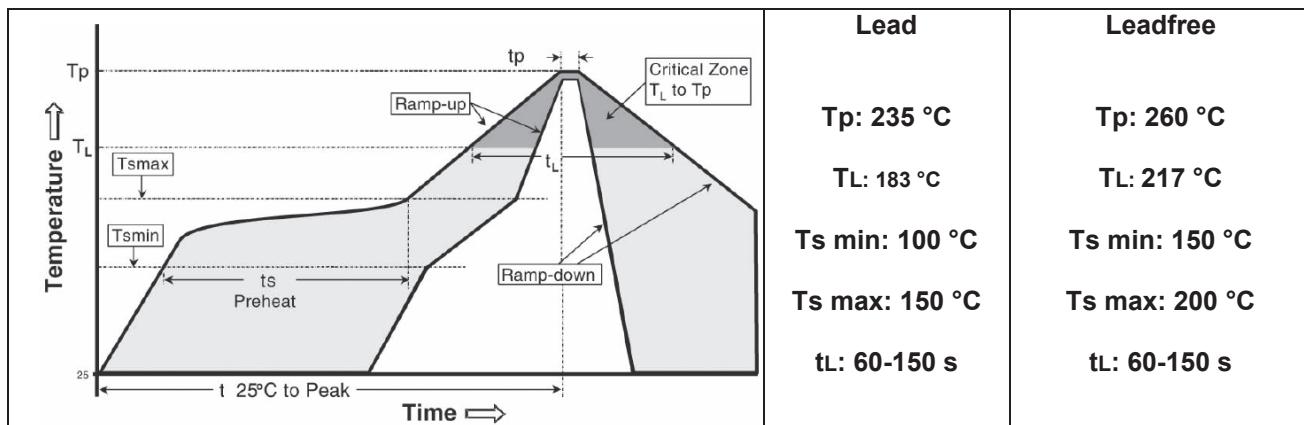

Process recommendation

After soldering, no solder paste should touch the side of the capacitor die as that might results in leakage currents due to remaining flux.

In order to use IPDiA standard capacitors within the JEDEC format and recommendation, the solder flux must be cleaned after reflow soldering step.

Notes: for a proper flux cleaning process, "rosin" flux type (R) or "water soluble" flux type (WS) is recommended for the solder printing material. "No clean" flux (NC) solder paste is not recommended.

In case the flux is not cleaned after the reflow soldering, the standard JEDEC would probably not be appropriate and the solder volume must be controlled:


- using smallest aperture design for the stencil, and using finer solder paste type 4 or 5 for a proper printing process.
- Mirroring pads would be the best recommendation

Pad recommendation

The capacitor is compatible with generic requirements for flip chip design (IPC7094). Standard IPDiA 3D package can be compliant with established EIA size (0201, 0402, 0603, ...).

Die size and land pattern dimensions is set up according to following range :

EIA size	0201	0402	0603	0805	1206	1812
Dimension max(X1 x X2) mm	0.86x0.66	1.26x0.76	1.86x1.16	2.26x1.46	3.46x1.86	4.76x3.66
Typical . die thickness X3 (mm)	0.1 or 0.4					
Typical pad size* (mm)	0.15x0.40	0.30x0.50	0.40x0.90	0.50x1.20	0.60x1.60	0.90x3.40
Typical pad separation (X4 mm)	0.3	0.4	0.8	1	2	2.7

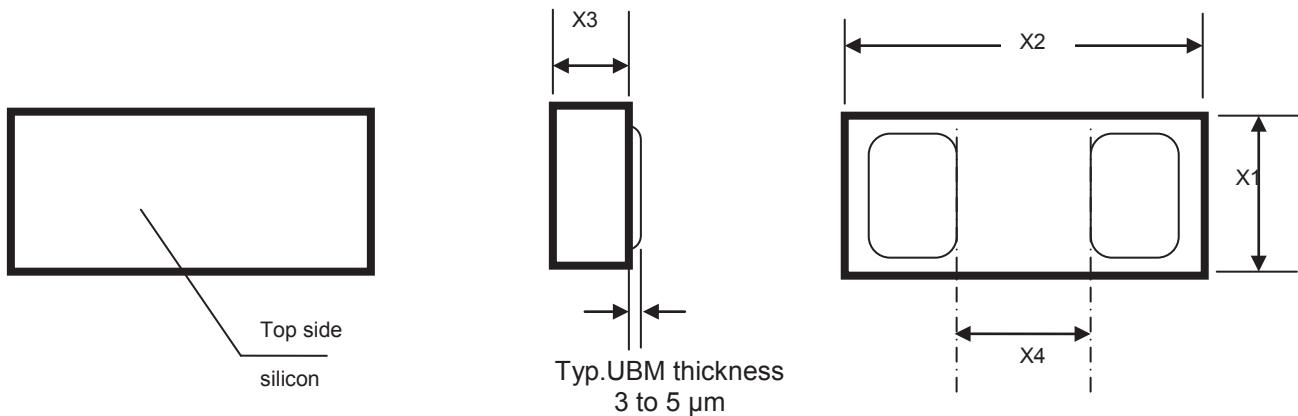

After soldering, no solder paste should touch the side of the capacitor die as that might result in leakage currents due to remaining flux.

Manual Handling Considerations

These capacitors are designed to be mounted with a standard SMT line, using solder printing step, pick and place machine and a final reflow soldering step. In case of manual handling and mounting conditions, please follow below recommendations:

- Minimize mechanical pressure on the capacitors (use of a vacuum nozzle is recommended).
- Use of organic tip instead of metal tip for the nozzle.
- Minimize temperature shocks (Substrate pre-heating is recommended).
- No wire bonding on 0402 47nF, 0402 100nF, 1206 1µF and 1812 3,3µF

Process steps:

- On substrate, form the solder meniscus on each land pattern targeting 100 µm height after reflow (screen printing, dispensing solder paste or by wire soldering).
- Pick the capacitor from the tape & reel or the Gel Pack keeping backside visible using a vacuum nozzle and organic tip.
- Temporary place the capacitor on land pattern assuming the solder paste (Flux) will stick and maintain the capacitor.
- Reflow the assembly module with a dedicated thermal profile (see reflow recommendation profile).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IPDiA:

[93512542F610-T3A](#) [93512542H622-T3A](#) [93512542S710-T3A](#) [93512542F610-T1A](#) [93512542H622-T1A](#)
[93512542S710-T1A](#) [93512542Y733-T1A](#) [93512542Y733-T3A](#) [93512572C339-T1A](#) [93512572C347-T1A](#)
[93512572C368-T1A](#) [93512572C410-T1A](#) [93512572C510-T1A](#) [93512572F533-T1A](#) [93512572G610-T1A](#)
[93512572Y710-T1A](#) [93512572C510-T3A](#)