



Selection. Service. Support. Power Solutions from ON Semiconductor



Investors



HOME

PRODUCTS

DESIGN SUPPORT

Support >

APPLICATIONS

Design Resources

QUALITY

Company

Contact Us

n Cross - Reference

MyON: Sign In

Careers

» Advanced

Design Support

Technical Documentation



Design & Development Tools

Evaluation Boards

Conversion Services

Evaluation Board Documents

Custom Foundry Services

Sample Kits

Simulation Models

Product Recommendation Tools

Software

Video

Technical Support

NCP1421EVB:NCP1421 Up to 600 mA DC **Evaluation Board**


Design Support

Evaluation Boards

- DC Converter

Evaluation Board Description

NCP1421 is a monolithic, micro power, high frequency, step -up switching converter IC designed for battery operated hand -held electronic products with up to 600 mA loading. It

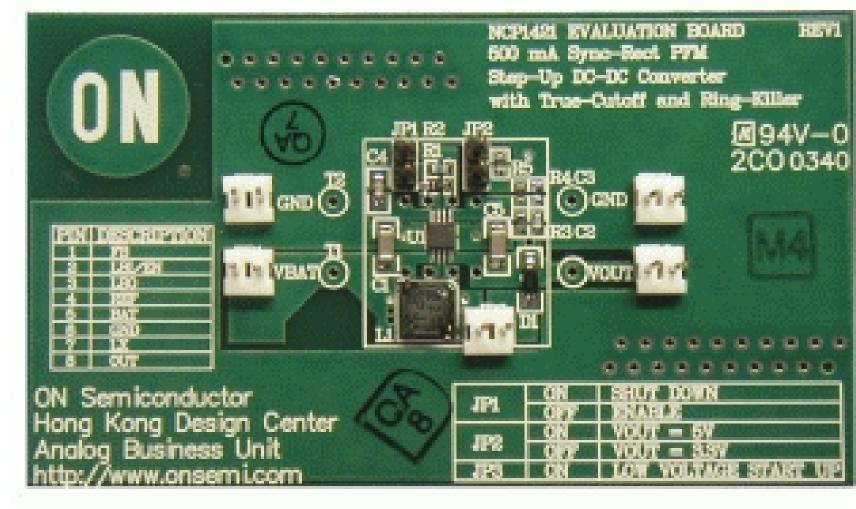

integrates a synchronous rectifier (Sync -Rect) to improve efficiency and to eliminate the external Schottky Diode. The NCP1421's high switching frequency (up to 1.2 MHz) allows for a low profile, small sized inductor and output capacitor to be used. When the device is disabled, the internal conduction path from the battery to the load is fully blocked, which isolates the load from the battery. This True -Cutoff function reduces the shutdown current to typically only 50nA. A Ring Killer is also integrated to eliminate high -frequency ringing in discontinuous conduction mode. Finally, a Low -Battery Detector, Logic - Controlled Shutdown, Cycle - by Cycle Current Limiting and Thermal Shutdown provide value -added features for various battery operated applications. With all these functions ON, the quiescent supply current is typically only 8.5 µ A. This device is available in the compact and low profile Micro8 package.

Features and Applications

Features

- ? High Efficiency:
 - -94% for 3.3 V Output at 200 mA from 2.0 V Input
 - -84% for 3.3 V Output at 500 mA from 2.5 V Input
- ? High Switching Frequency, up to 1.2 MHz (Not Hitting Current Limit)
- ? True Cutoff Function Reduces Device Shutdown Current to typically 50nA
- ? Anti Ringing Ring Killer for Discontinuous Conduction Mode

Evaluation Board Information

Evaluation Board	Status	Pb- free	Short Description	Parts Used	Action
NCP1421EVB	Active		NCP1421 Up to 600 mA DC -DC Converter Evaluation Board	NCP1421DMR2	Contact Local Sales Office

Technical Documents							
Туре	Document Title	Document ID/Size					
Eval Board: BOM	NCP1421EVB BILL OF MATERIALS	NCP1421EVB_BOM.REV1.PDF - 70.0 KB	1				
Eval Board: Gerber	NCP1421EVB GERBER LAYOUT FILES (ZIP FORMAT)	NCP1421EVB_GERBER.REV1.ZIP - 180.0 KB	1				
Eval Board: Schematic	NCP1421EVB SCHEMATIC	NCP1421EVB_SCHEMATIC.REV1.PDF - 126.0 KB	1				
Eval Board: Test Procedure	NCP1421EVB TEST PROCEDURE	NCP1421EVB_TEST_PROCEDURE.REV1.PDF - 115.0 KB	1				



or Register

Previously Viewed Products

| ? ???

Clear List

Go

Design Support

Technical Documentation Design Resources **Technical Support** Sales Support