

Features

Switching Regulator

- RoHS 10/10 conform (100% lead free)
- High reflow temperature SMD package
- Adjustable output voltage
- Short circuit protection, thermal shutdown
- Remote ON/OFF control
- very low shutdown current



R-78AA-1.0

1.0 Amp SMD Single Output



Description


The R-78AAx-1.0SMD series are manufactured without lead and meet the requirements for RoHS 10/10 as well as the increased reflow soldering temperatures associated with vapor phase soldering, making these high efficiency switching regulators ideally suited to modern pick-and-place mass production. The efficiency of up to 94% means that very little energy is wasted as heat. The additional features of remote on/off control and adjustable output voltages will find many uses in the battery-powered, industrial, medical and automotive markets.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Vout Adjust Range [VDC]	Output Current [mA]	Efficiency @ min Vin [%]	Efficiency @ max. Vin [%]
R-78AA1.5-1.0SMD	4.75 - 18	1.5	fixed	1.0	77	73
R-78AA1.8-1.0SMD	4.75 - 18	1.8	1.5 - 3.0	1.0	82	76
R-78AA2.5-1.0SMD	4.75 - 18	2.5	1.5 - 3.0	1.0	87	81
R-78AA3.3-1.0SMD	4.75 - 18	3.3	3.0 - 5.5	1.0	90	84
R-78AA5.0-1.0SMD	6.5 - 18	5.0	3.0 - 5.5	1.0	94	89



Model Numbering

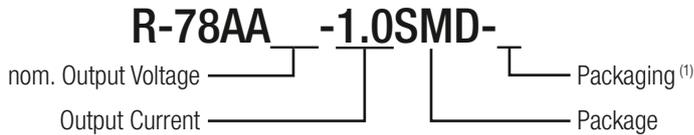

Notes:

Note1: add suffix -R for tape & reel packaging

Ordering Examples:

R-78AA5.0-1.0SMD-R = 5.0VDC Output Voltage, 1.0A, SMD, tape and reel packaging
 R-78AA2.5-1.0SMD = 2.5VDC Output Voltage, 1.0A, SMD, tube



EN60950-1 certified
 IEC60950-1 certified

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Quiescent Current	Vin= min. to max.		5mA	7mA
Internal Power Dissipation				0.4W
Trimming				see calculation
Minimum Load ⁽²⁾		0%		
Start-up time	ON/OFF CTRL		50ms	
ON/OFF CTRL	DC-DC ON DC-DC OFF			Open or 2.8VDC < Vr < 5VDC GND or 0VDC < Vr < 0.8VDC
Input Current of CTRL Pin	DC-DC OFF		1.8µA	
Standby Current			20µA	35µA
CTRL threshold voltage		2.4VDC	2.6VDC	2.8VDC
CTRL voltage hysteresis			250mV	
Internal Operating Frequency		335kHz	385kHz	435kHz
Output Ripple and Noise	20MHz BW		20mVp-p	30mVp-p
Maximum Capacitive Load	with normal start-up time, no external components			470µF
	with <1 second start-up time + diode protection circuit			6800µF


Notes:

Note2: Operation under no load will not harm the converter, but specifications may not be met.
A minimum load of 10mA is recommended

Trimming

Adjustment Resistor Values


	R1	R2	R3	Vref(V)
1.8V	10KΩ	21KΩ	5.6KΩ	1.23
2.5V	22KΩ	21KΩ	5.6KΩ	1.23
3.3V	16.9KΩ	10KΩ	5.6KΩ	1.23
5.0V	30.9KΩ	10KΩ	10KΩ	1.23

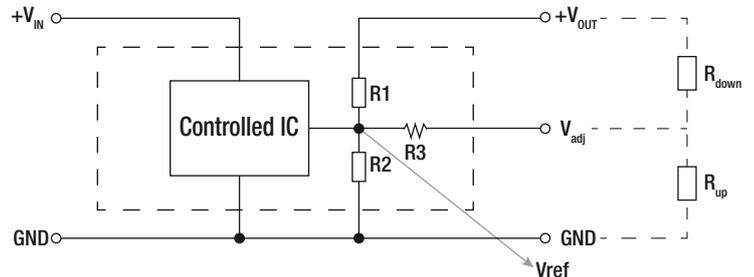


$$\text{Trim down } R_{\text{down}} = \frac{R2(R1 + R3) \times (V_{\text{ref}} - V_o) + V_{\text{ref}} \times R1R3}{R2V_o - V_{\text{ref}}(R1 + R2)}$$

$$\text{Trim up } R_{\text{up}} = \frac{R2R3(V_{\text{ref}} - V_o) + V_{\text{ref}}R1(R2 + R3)}{R2(V_o - V_{\text{ref}}) - V_{\text{ref}}R1}$$

Efficiency vs. Vin (full load)

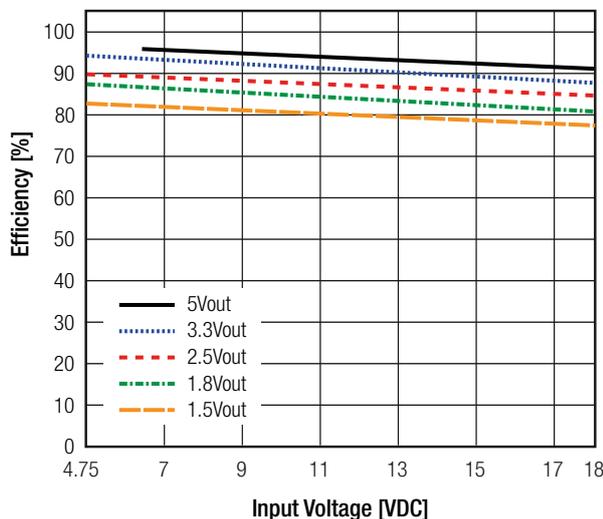


Ripple vs. Vin (full load)

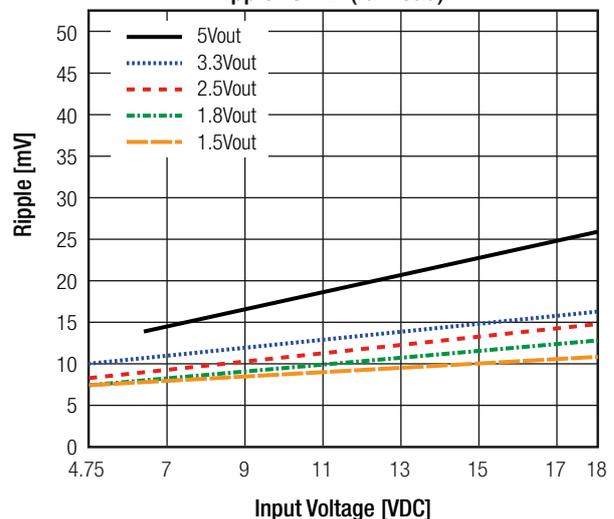


continued on next page

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


Efficiency vs. Load (max. Vin)

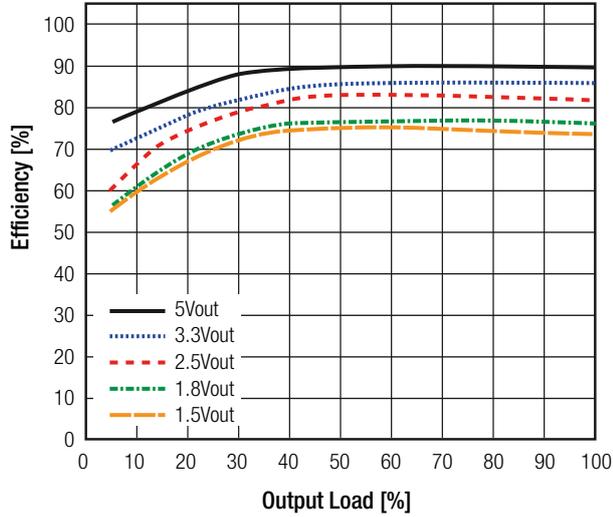


Ripple vs. Load (max. Vin)

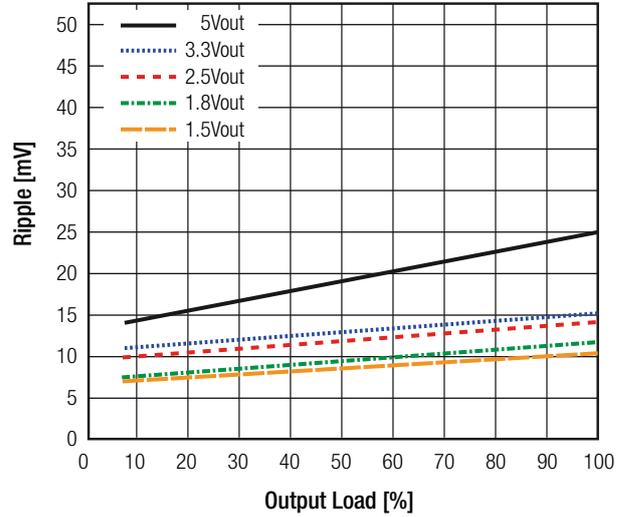

Efficiency vs. Load (min. Vin)

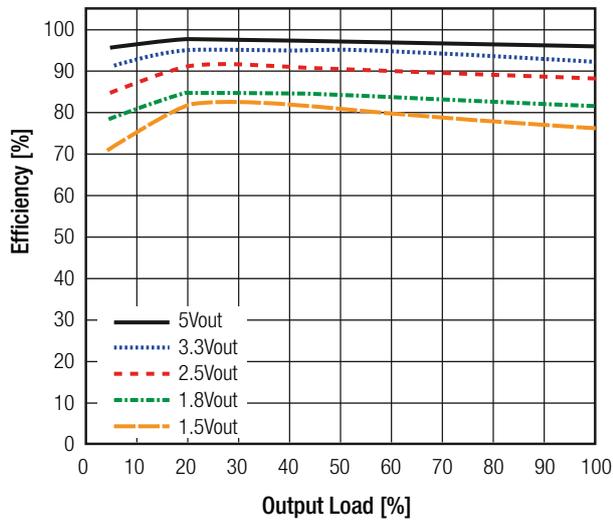

Ripple vs. Load (min. Vin)

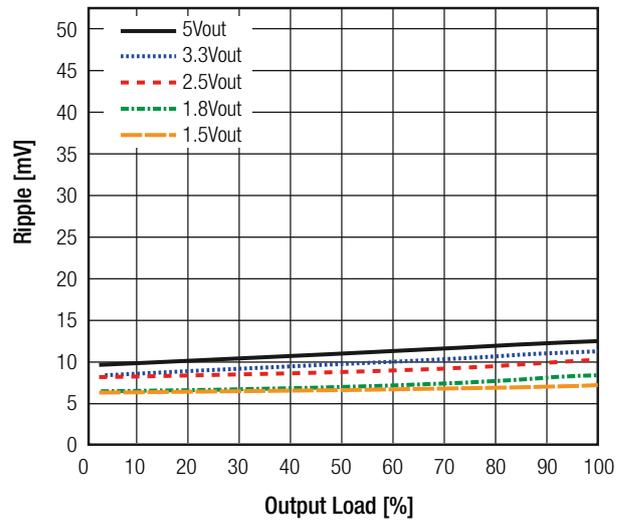

REGULATIONS

Parameter	Condition		Value
Output Accuracy	full load		±2.0% typ. / ±3.0% max.
Line Regulation	low line to high line, full load		±0.2% typ. / ±0.4% max.
Load Regulation	10% to 100% load		±0.7% typ. / ±1.0% max.
Transient Response	25mA/μs	100% <-> 50% load	±85mV typ. / ±100mV max.

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


PROTECTIONS		
Parameter	Condition	Value
Short Circuit Protection (SCP)		continuous, automatic recovery
Short Circuit Input Current	nom. Vin= 12VDC	120mA max.

Optional Diode Protection Circuit


Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter when it is powered down.

The diode can either be fitted across the device if the source is low impedance or fitted in series with the output (recommended).

Optional Protection 1:

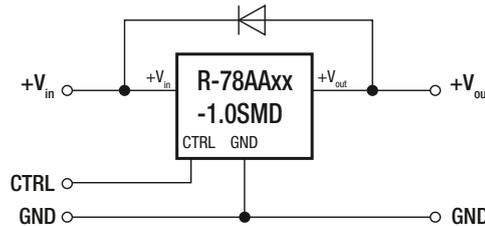


Optional Protection 2:

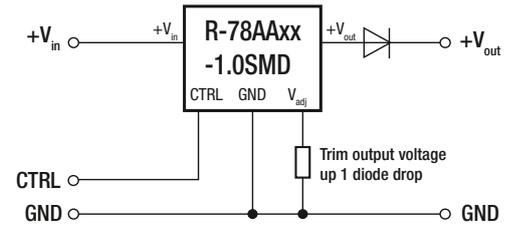

ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	with derating (see graph)		-40°C to +85°C
Maximum Case Temperature			+100°C
Temperature Coefficient			±0.015%/°C
Thermal Impedance	0.1m/s, horizontal		70°C/W
Operating Altitude			2000m
Operating Humidity	non-condensing		5% - 95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C +71°C	13338 - 21070 x 10 ³ hours 3880 - 6769 x 10 ³ hours

Derating Graph

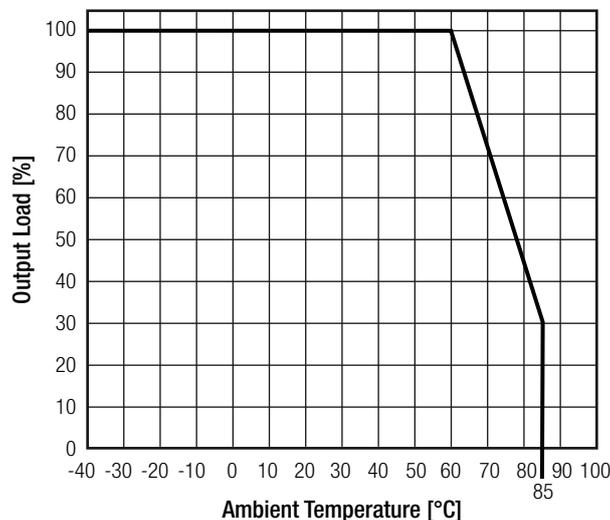

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

SAFETY AND CERTIFICATIONS





Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	1603123	IEC60950-1:2005, 2nd Edition + AM 2:2013 EN60950-1:2006 + AM 2:2013
EAC	RU-AT.49.09571	TP TC 004/2011 TP TC 004/2011
RoHS 2+		RoHS 2011/65/EU + AM2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter	EN55032, Class B
ESD Electrostatic discharge immunity test	Air ±8kV; Contact ±4kV	EN61000-4-2
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	EN61000-4-3



DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case PCB	non-conductive black plastic, (UL94 V-2) FR4, (UL94 V-1)
Dimension (LxWxH)		15.3 x 9.6 x 8.8mm
Weight		1.7g typ.

Dimension Drawing (mm)



Recommended Footprint Details



Pinning information


Pin #	Single
1,2	+Vin
3,7,8,9	GND
4,5	+Vout
6	Vadj
10	CTRL

Tolerance:
xx.x= 0.5mm
xx.xx= ±0.25mm


Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

INSTALLATION AND APPLICATION


Standard Application Circuit

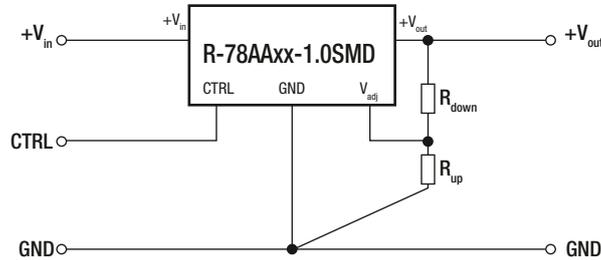

3.3V/5V Selectable 1A Power Supply

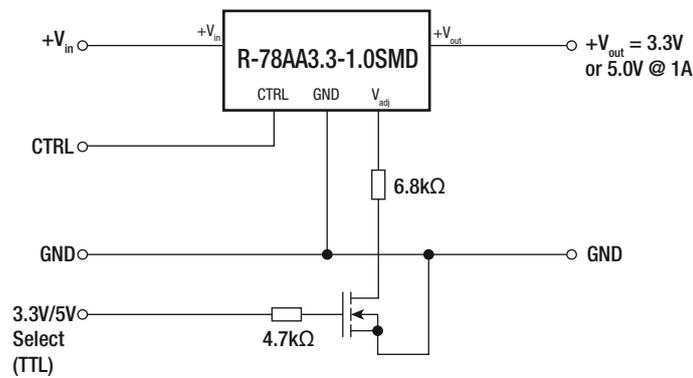

Driving a High Capacitive Load

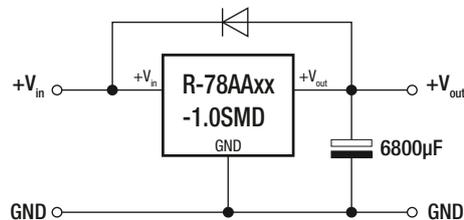

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	530.0 x 17.0 x 13.0mm
	tape and reel (carton)	355.0 x 342.0 x 36.0mm
Packaging Quantity	tube	33pcs
	tape and reel	250pcs
Tape Width		24mm
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.