



NPN SILICON GERMANIUM RF TRANSISTOR

NESG3031M14

NPN SiGe RF TRANSISTOR FOR LOW NOISE, HIGH-GAIN AMPLIFICATION 4-PIN LEAD-LESS MINIMOLD (M14, 1208 PKG)

FEATURES

- The device is an ideal choice for low noise, high-gain amplification
NF = 0.6 dB TYP., $G_a = 16.0$ dB TYP. @ $V_{CE} = 2$ V, $I_c = 6$ mA, $f = 2.4$ GHz
NF = 0.95 dB TYP., $G_a = 10.0$ dB TYP. @ $V_{CE} = 2$ V, $I_c = 6$ mA, $f = 5.2$ GHz
NF = 1.1 dB TYP., $G_a = 9.5$ dB TYP. @ $V_{CE} = 2$ V, $I_c = 6$ mA, $f = 5.8$ GHz
- Maximum stable power gain: MSG = 15.0 dB TYP. @ $V_{CE} = 3$ V, $I_c = 20$ mA, $f = 5.8$ GHz
- SiGe HBT technology (UHS3) adopted: $f_{max} = 110$ GHz
- 4-pin lead-less minimold (M14, 1208 PKG)

<R> ORDERING INFORMATION

Part Number	Order Number	Package	Quantity	Supplying Form
NESG3031M14	NESG3031M14-A	4-pin lead-less minimold (M14, 1208 PKG) (Pb-Free)	50 pcs (Non reel)	• 8 mm wide embossed taping • Pin 1 (Collector), Pin 4 (Emitter) face the perforation side of the tape
NESG3031M14-T3	NESG3031M14-T3-A		10 kpcs/reel	

Remark To order evaluation samples, contact your nearby sales office.
Unit sample quantity is 50 pcs.

ABSOLUTE MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V_{CBO}	12.0	V
Collector to Emitter Voltage	V_{CEO}	4.3	V
Emitter to Base Voltage	V_{EBO}	1.5	V
Collector Current	I_c	35	mA
Total Power Dissipation	P_{tot} ^{Note}	150	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^\circ\text{C}$

Note Mounted on $1.08\text{ cm}^2 \times 1.0\text{ mm}$ (t) glass epoxy PWB

Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

ELECTRICAL CHARACTERISTICS (T_A = +25°C)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
DC Characteristics						
Collector Cut-off Current	I _{CBO}	V _{CE} = 5 V, I _E = 0 mA	–	–	100	nA
Emitter Cut-off Current	I _{EBO}	V _{EB} = 1 V, I _C = 0 mA	–	–	100	nA
DC Current Gain	h _{FE} ^{Note 1}	V _{CE} = 2 V, I _C = 6 mA	220	300	380	–
RF Characteristics						
Insertion Power Gain	S _{21e} ²	V _{CE} = 3 V, I _C = 20 mA, f = 5.8 GHz	6.5	9.0	–	dB
Noise Figure (1)	NF	V _{CE} = 2 V, I _C = 6 mA, f = 2.4 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	0.6	–	dB
Noise Figure (2)	NF	V _{CE} = 2 V, I _C = 6 mA, f = 5.2 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	0.95	–	dB
Noise Figure (3)	NF	V _{CE} = 2 V, I _C = 6 mA, f = 5.8 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	1.1	1.5	dB
Associated Gain (1)	G _a	V _{CE} = 2 V, I _C = 6 mA, f = 2.4 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	16.0	–	dB
Associated Gain (2)	G _a	V _{CE} = 2 V, I _C = 6 mA, f = 5.2 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	10.0	–	dB
Associated Gain (3)	G _a	V _{CE} = 2 V, I _C = 6 mA, f = 5.8 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	7.5	9.5	–	dB
Reverse Transfer Capacitance	C _{re} ^{Note 2}	V _{CB} = 2 V, I _E = 0 mA, f = 1 MHz	–	0.15	0.25	pF
Maximum Stable Power Gain	MSG ^{Note 3}	V _{CE} = 3 V, I _C = 20 mA, f = 5.8 GHz	12.0	15.0	–	dB
Gain 1 dB Compression Output Power	P _{O(1dB)}	V _{CE} = 3 V, I _{C(set)} = 20 mA, f = 5.8 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	13.0	–	dBm
Output 3rd Order Intercept Point	OIP ₃	V _{CE} = 3 V, I _{C(set)} = 20 mA, f = 5.8 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	18.0	–	dBm


- Notes**
1. Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2%
 2. Collector to base capacitance when the emitter grounded
 3. $MSG = \left| \frac{S_{21}}{S_{12}} \right|$

h_{FE} CLASSIFICATION


Rank	FB
Marking	zJ
h _{FE} Value	220 to 380

TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise specified)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

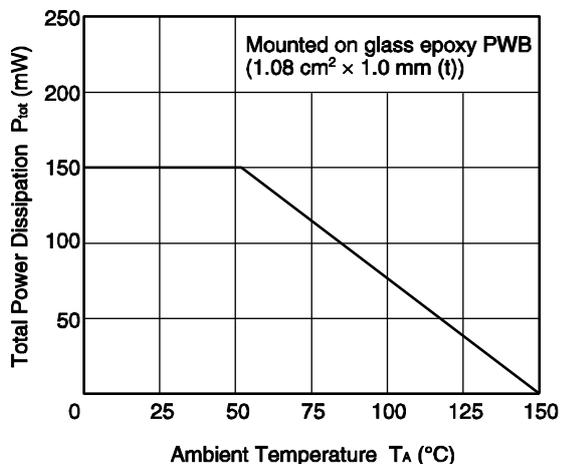


REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

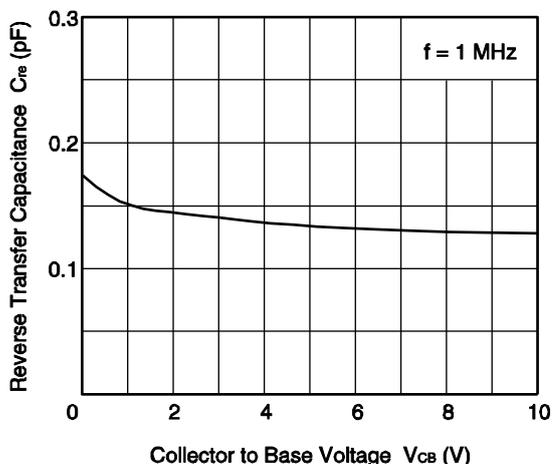


COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

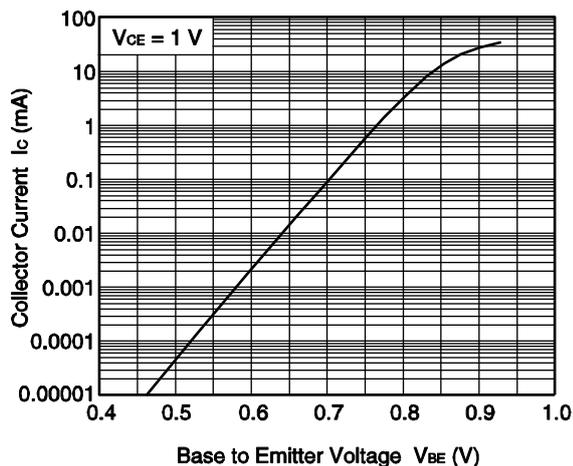


COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

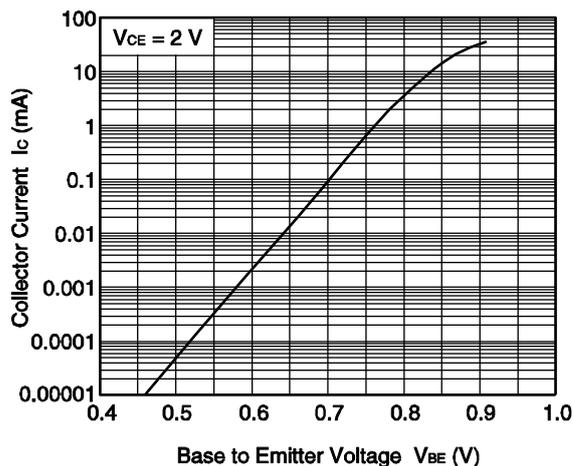

COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

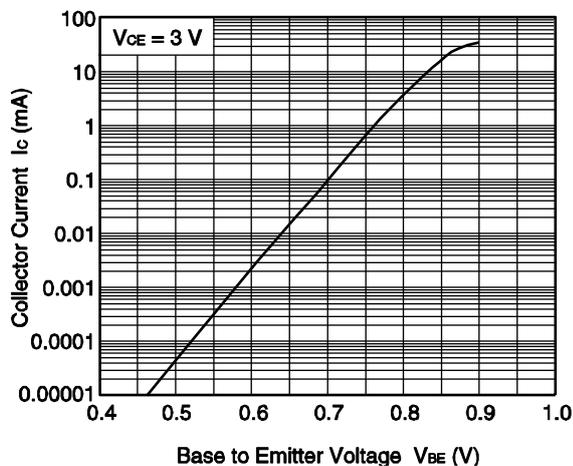


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

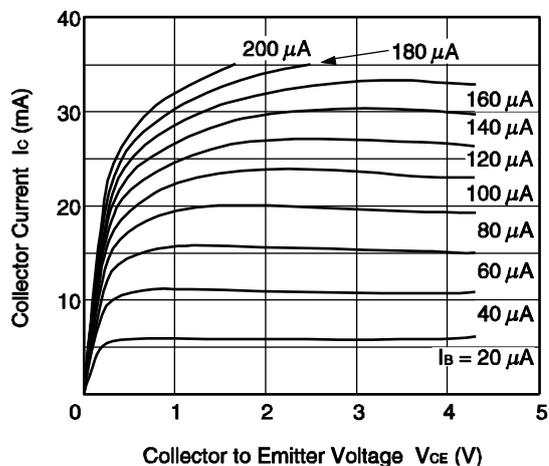


Remark The graphs indicate nominal characteristics.


DC CURRENT GAIN vs. COLLECTOR CURRENT

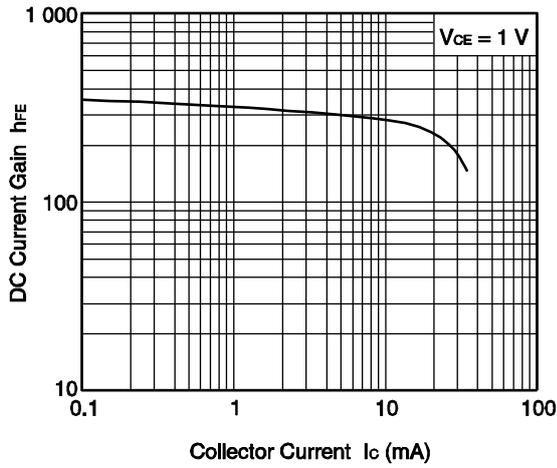


DC CURRENT GAIN vs. COLLECTOR CURRENT

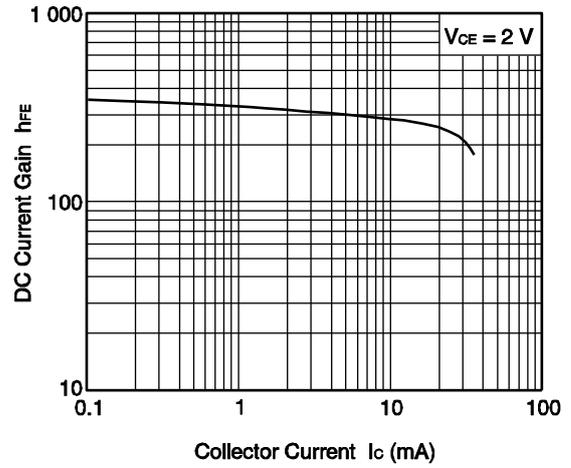


DC CURRENT GAIN vs. COLLECTOR CURRENT

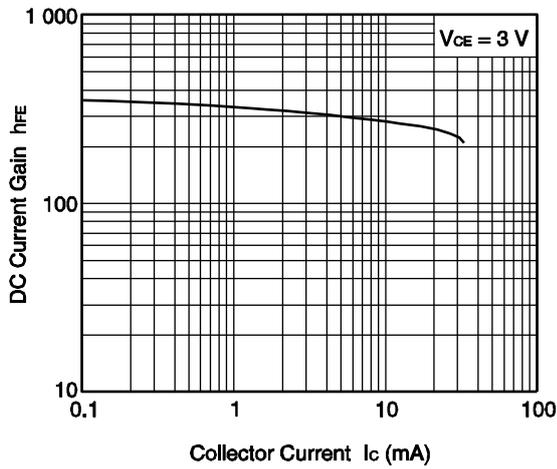


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

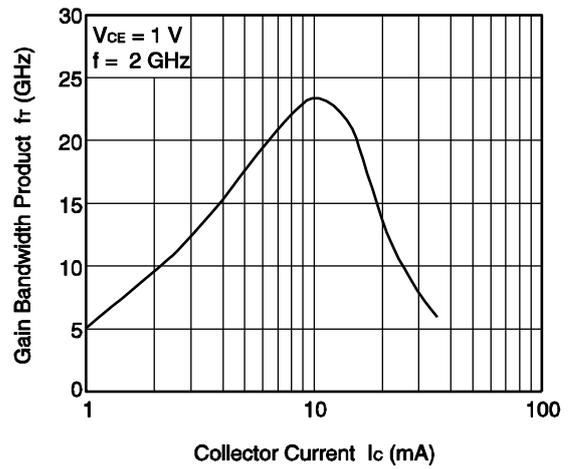

GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

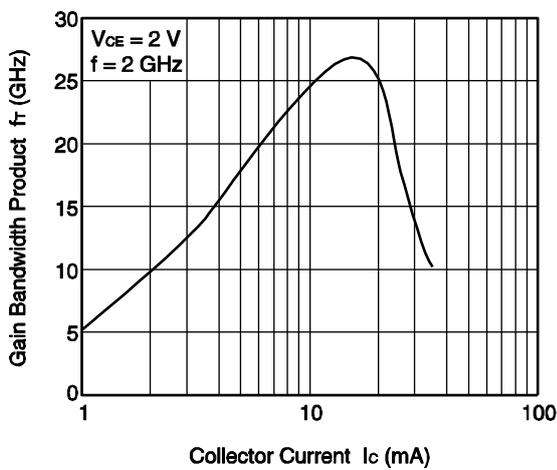


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

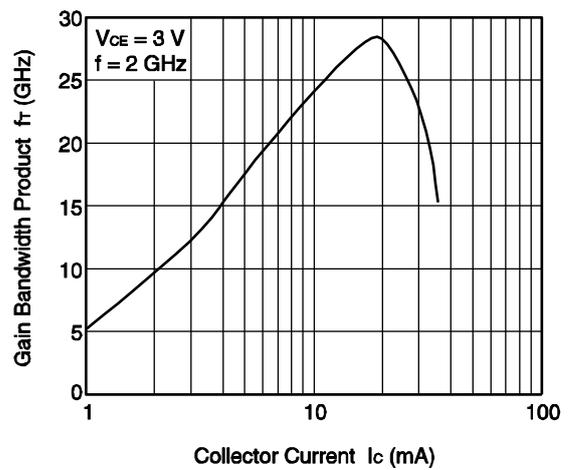


Remark The graphs indicate nominal characteristics.


INSERTION POWER GAIN, MAG, MSG vs. FREQUENCY

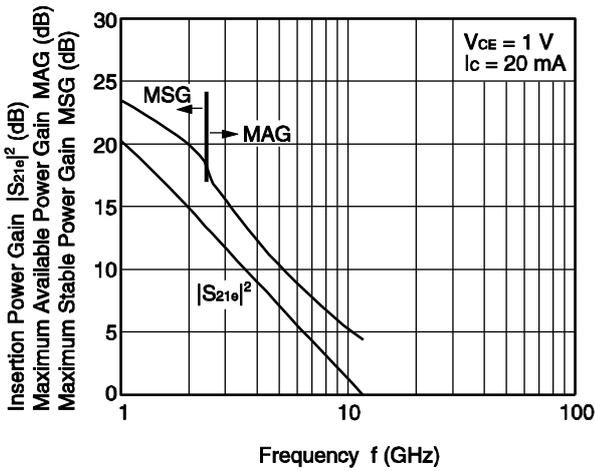


INSERTION POWER GAIN, MAG, MSG vs. FREQUENCY

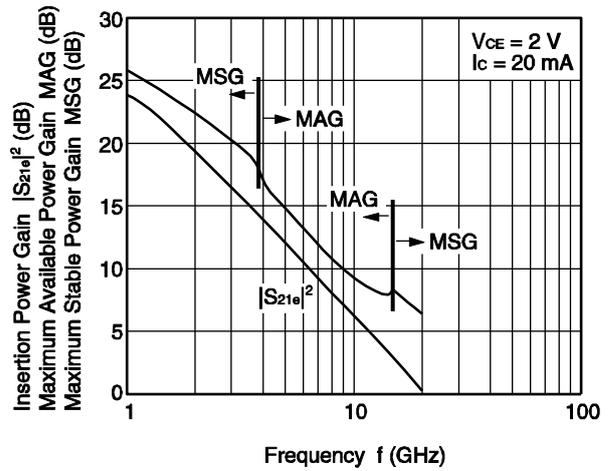


INSERTION POWER GAIN, MAG, MSG vs. FREQUENCY

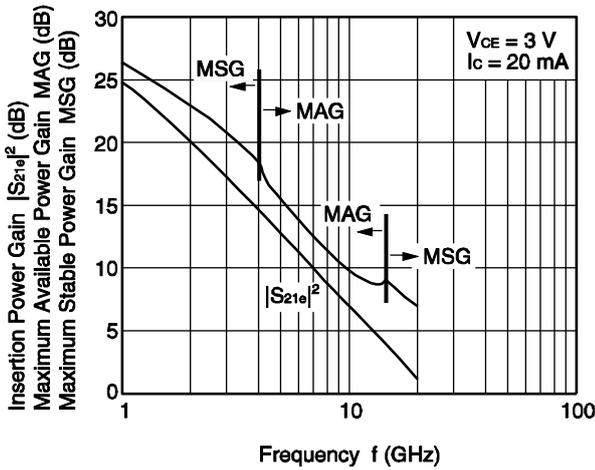


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

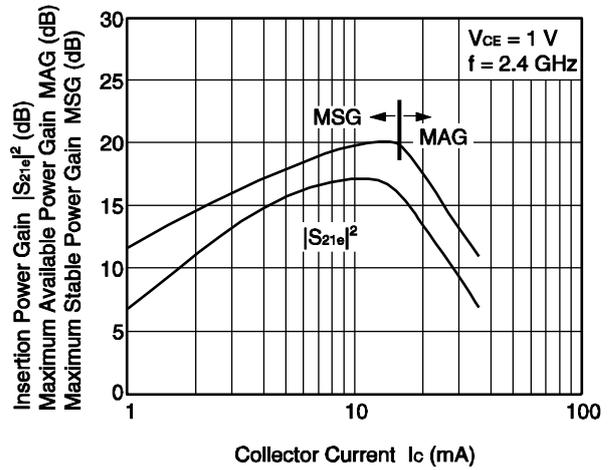

INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

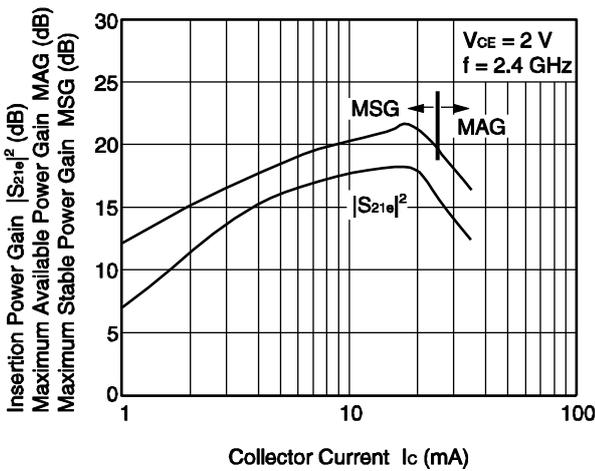


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

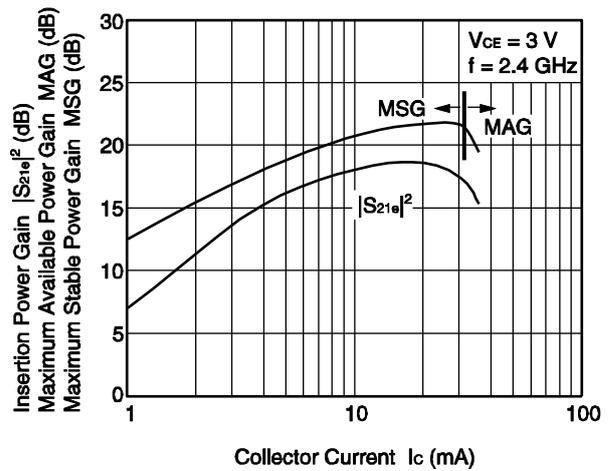


Remark The graphs indicate nominal characteristics.


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

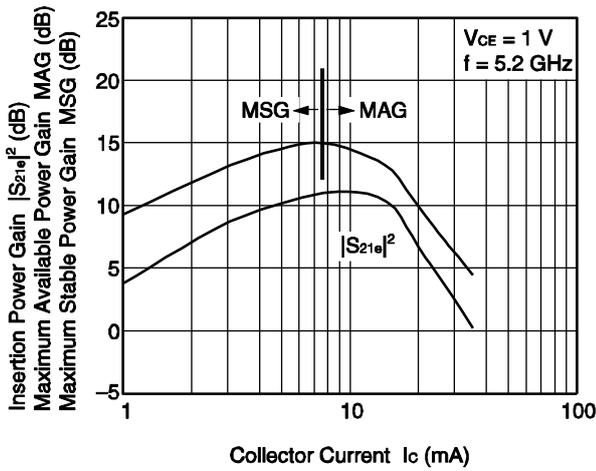


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

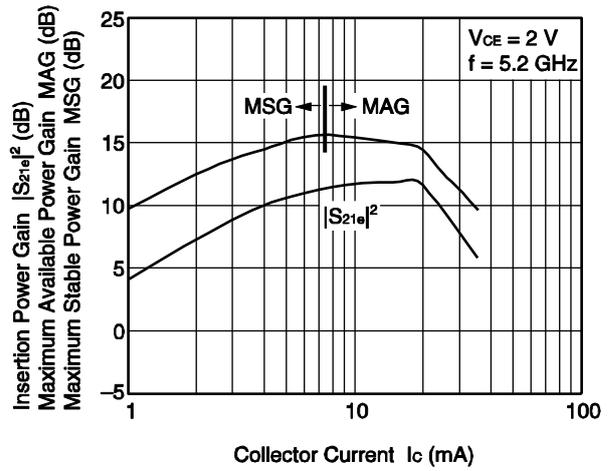


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

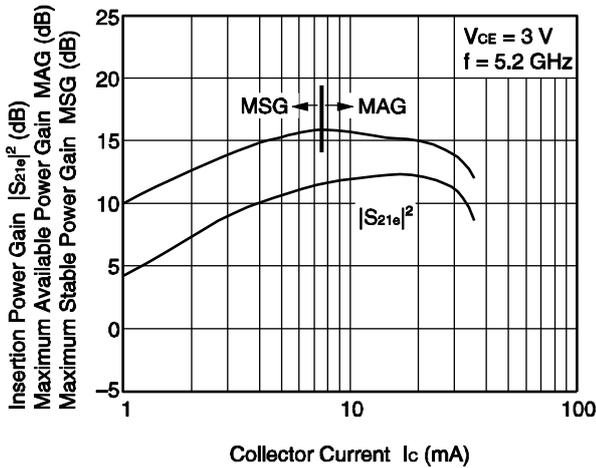


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

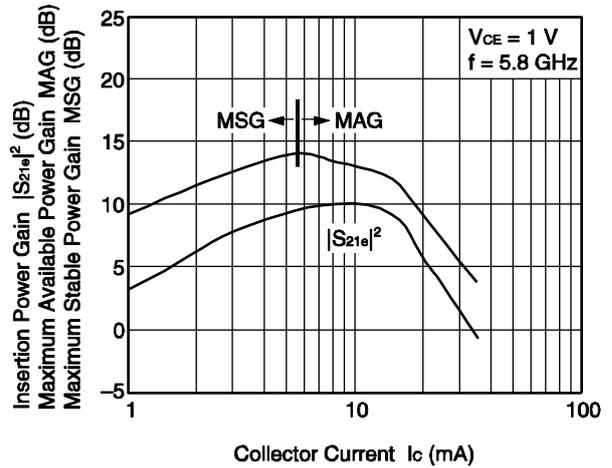

INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

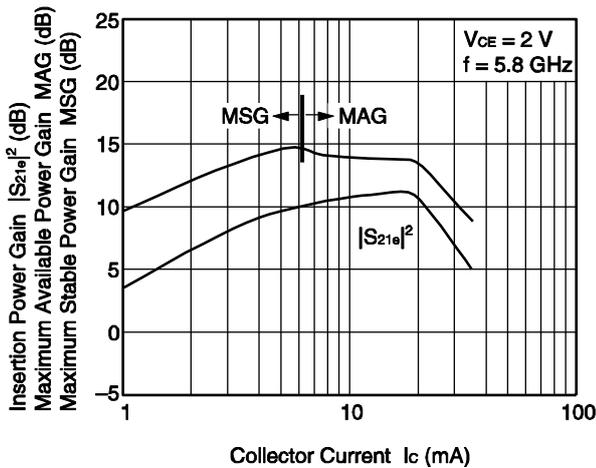


INSERTION POWER GAIN, MAG, MSG vs. COLLECTOR CURRENT

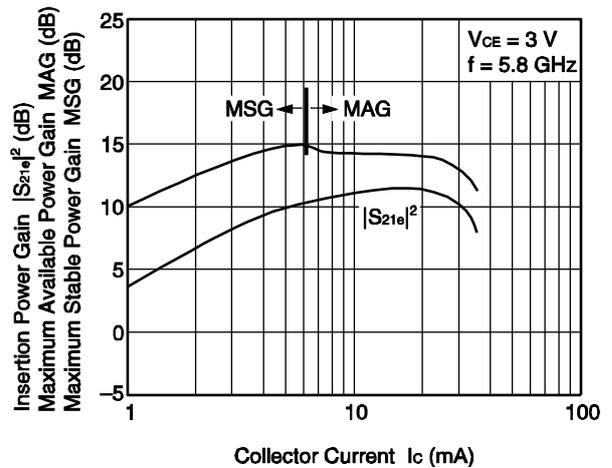


Remark The graphs indicate nominal characteristics.


OUTPUT POWER, COLLECTOR CURRENT vs. INPUT POWER

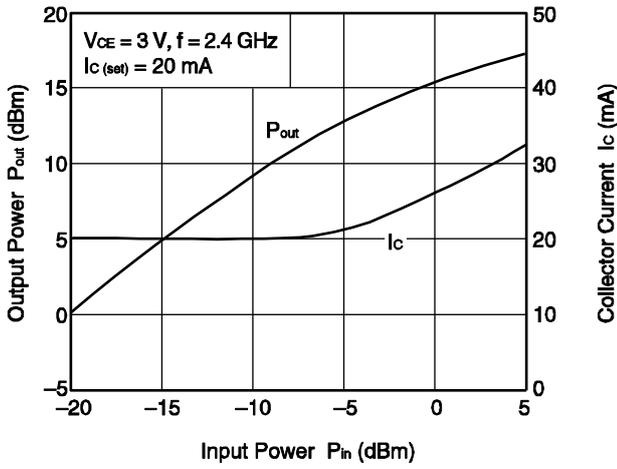


OUTPUT POWER, COLLECTOR CURRENT vs. INPUT POWER

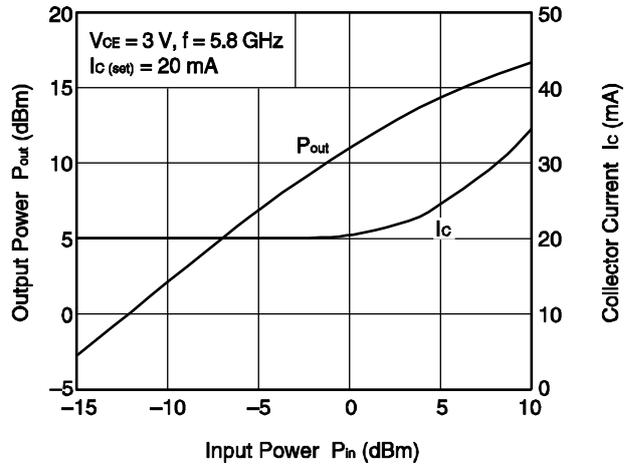

NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

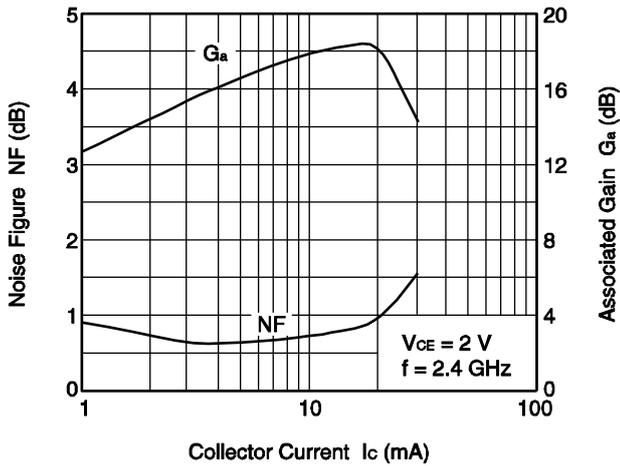

NOISE FIGURE, ASSOCIATED GAIN vs. COLLECTOR CURRENT

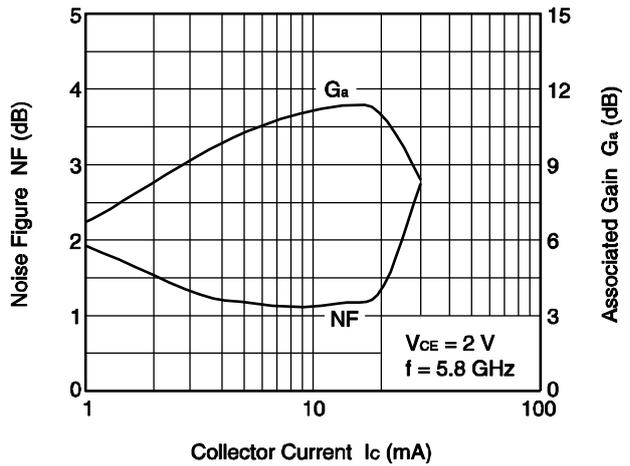


Remark The graphs indicate nominal characteristics.

- <R> **S-PARAMETERS**
- S-parameters and noise parameters are provided on our Web site in a format (S2P) that enables the direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.
 - [Click here to download S-parameters.](#)
 - [\[RF and Microwave\] ® \[Device Parameters\]](#)
 - URL <http://www.necel.com/microwave/en/>

<R> **PACKAGE DIMENSIONS**

4-PIN LEAD-LESS MINIMOLD (M14, 1208 PKG) (UNIT: mm)

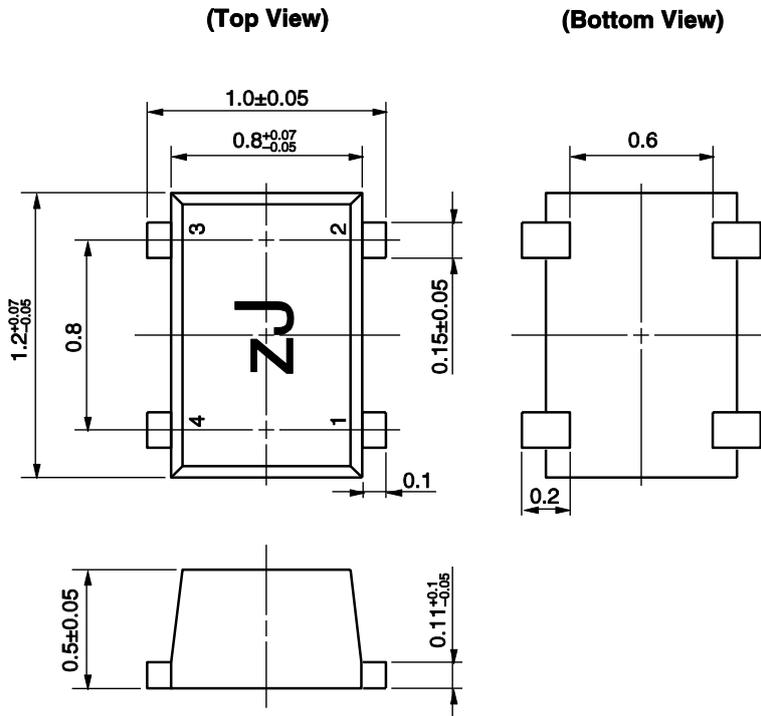

PIN CONNECTIONS

- 1. Collector
- 2. Emitter
- 3. Base
- 4. Emitter

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CEL:

[NESG3031M14-T3-A](#)