

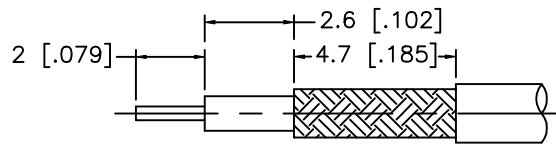





REV.	DATE	DESCRIPTION
A	01/12/02	MODIFY FERRULE LENGTH



RECOMMENDED CABLE
STRIPPING DIM'S.

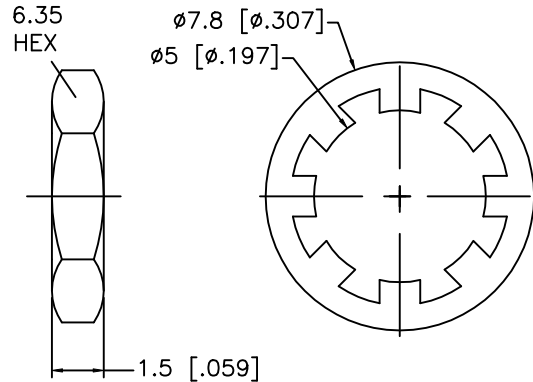

RECOMMENDED
MOUNTING HOLE

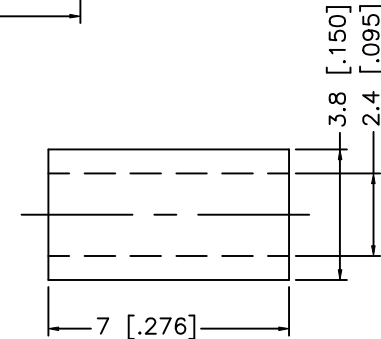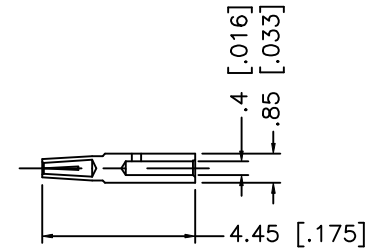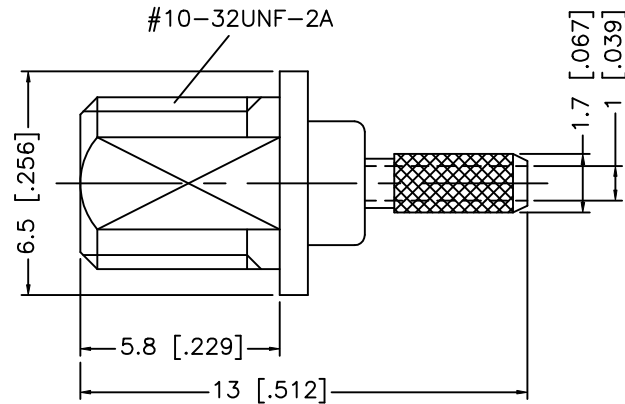

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol-Connex CONNECTOR CORPORATION			
1 BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"	DRAWN G.R.S.	01/12/02				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE MMCX BULKHEAD CRIMP JACK (FOR RG-178B/u, 196A/u CABLE)			
3 BARREL	BRASS	GOLD		ISSUED					
4 CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"			SIZE	FSCM NO.	DWG. NO.	REV.
5 FERRULE	COPPER	GOLD				A	99001	262120.DWG	A
6						SCALE	NA	PART NO.	SHEET
7								262120	1 OF 1
8			DO NOT SCALE DRAWING						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[262120](#)