
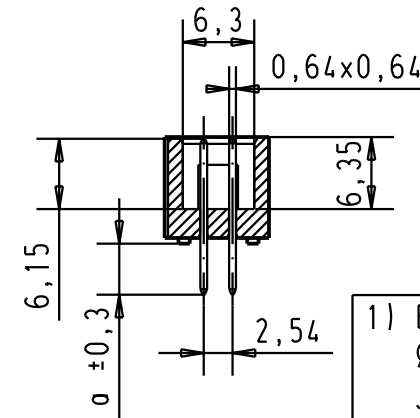
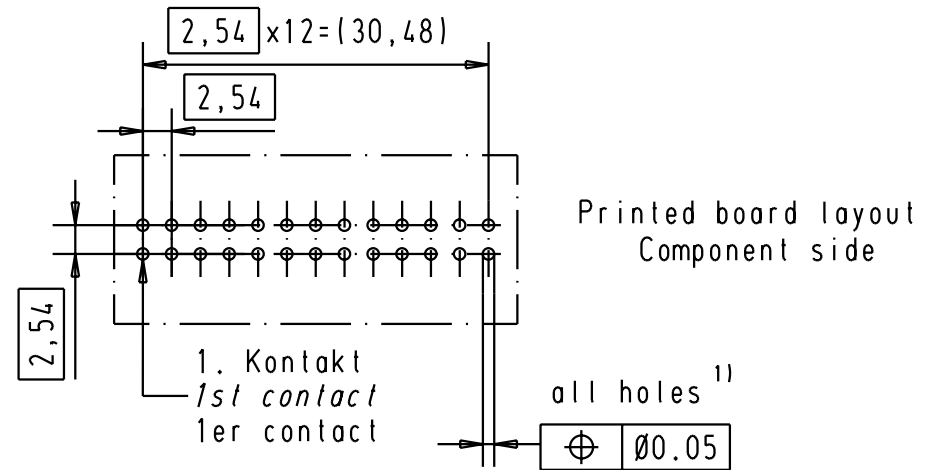


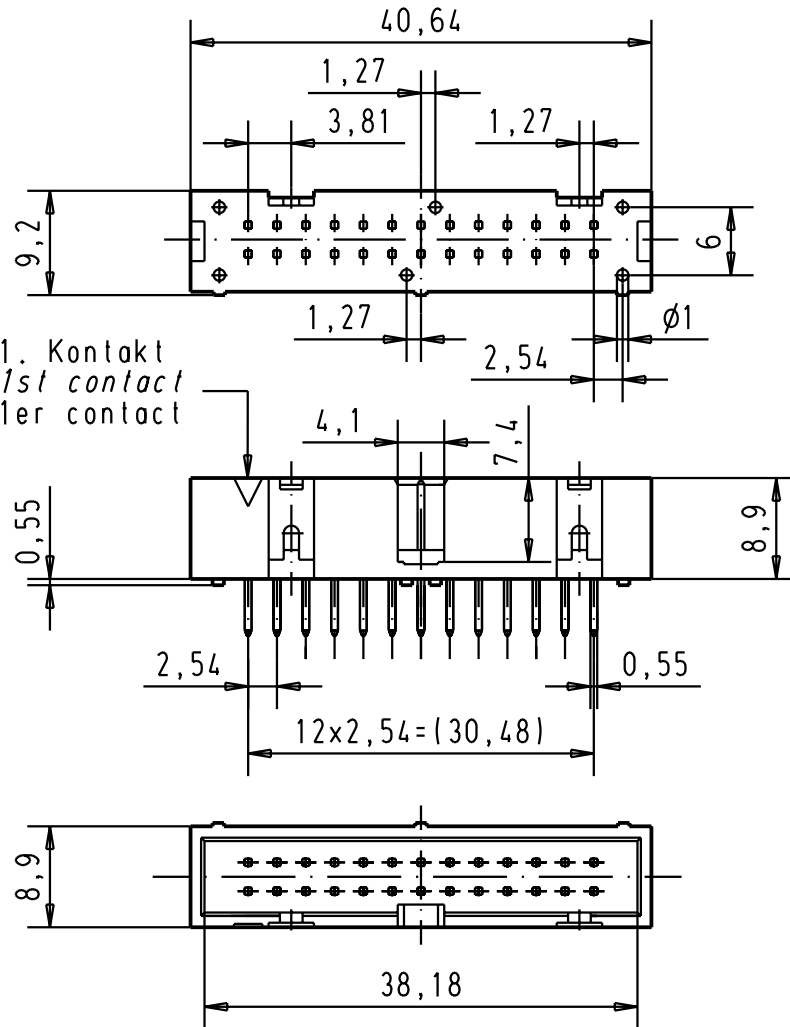

1) Einlotstifte passend für Lochungen $\phi 1 \pm 0,1$ nach IEC 60326-3
 Solder pins for PCB connections $\phi 1 \pm 0,1$ as per IEC 60326-3
 A souder pour des trous de $\phi 1 \pm 0,1$ selon IEC 60326-3

A	09185267322	3	4,5				Techn. Character.				Nicht toleriert	
	09185266322	2	4,5									
	09185265322	0,76µm Au	2,9					Dat.	Name	Massstab/Scale 1,5:1	SEK 18 Male connector 26 poles low profile with straight pins	
	09185267324	3	2,9				Detail.	01-FEB-00	JB			
	09185266324	2	2,9				Insp.					
	09185265324	0,76µm Au	2,9	29778	25-APR-02	CV	Stand.					
	Bestell-Nr. Part-No. Reference	Anforderungsstufe performance level Niveau de qualite	a	27931	15-JUNE-00	JB					TB	0918526x32x
26570				01-FEB-00	JB							
Mod.				Dat.	Name							
												Sub.

SEK 18 Male connector
 26 poles low profile
 with straight pins