

TTL Programmable Delay Lines

TTLPG
16-pin DIP

For delay adjustments via BCD programming. Simplifies minor adjustments and adds flexibility. Although indicated below that programmable modules are available up to 3-bit, 6-bit modules are available through a simple combination of modules (see next page).

- 5 to 500 ns delays available.
- 3-bit binary (1, 2, 4) programming gives 7 equal step delays.
- Low on $\bar{E}$ enables output.
- Complimentary output available.
- Available in 19 step delays from 1 to 64 ns.
- Designed for leading-edge timing.
- Low inherent delay from:
 - Input to output = 6.0 ± 1.5 ns.
 - Input to $\bar{\text{output}}$ = 3.0 ± 1.5 ns.
 - $\bar{E}$ to output = 10.0 ns maximum
 - S_n to output = 13.0 ns maximum
- Transfer molded — reliable. Contact factory for other logic specifications.
- Military models with temperature range of -55 to +125°C and ceramic package IC to meet MIL-STD-883C, add suffix "M" to part number.
- Military models as "M" above, but with ceramic package IC screened to MIL-STD-883C, add suffix "MX" to part number.
- Military models as "MX" above, but with in-house burn-in and thermal shock, add suffix "MY" to part number.
- Specifications are for Schottky TTL only.

MODEL HTTLDL ACTIVE TTL DELAY LINES

TECHNITROL PART NO.	Step Delay ns $\pm$ ns	Max. Delay ns $\pm$ ns	Output Rise Time (ns)
TTLPG301	1.0 $\pm$.4	13.0 $\pm$ 2.0	2.0
TTLPG302	2.0 $\pm$.6	20.0 $\pm$ 2.0	2.0
TTLPG303	3.0 $\pm$ 1.0	27.0 $\pm$ 2.0	2.0
TTLPG304	4.0 $\pm$ 1.0	34.0 $\pm$ 2.0	2.0
TTLPG305	5.0 $\pm$ 1.5	41.0 $\pm$ 2.0	2.0
TTLPG306	6.0 $\pm$ 1.5	48.0 $\pm$ 2.0	2.0
TTLPG307	7.0 $\pm$ 1.5	55.0 $\pm$ 2.5	2.0
TTLPG308	8.0 $\pm$ 1.5	62.0 $\pm$ 2.5	2.0
TTLPG309	9.0 $\pm$ 1.5	69.0 $\pm$ 3.0	2.0
TTLPG310	10.0 $\pm$ 1.5	76.0 $\pm$ 3.5	2.0
TTLPG315	15.0 $\pm$ 1.5	111.0 $\pm$ 5.0	2.0
TTLPG320	20.0 $\pm$ 1.5	146.0 $\pm$ 7.0	2.0
TTLPG325	25.0 $\pm$ 1.5	181.0 $\pm$ 9.0	2.0
TTLPG330	30.0 $\pm$ 2.0	216.0 $\pm$ 11.0	2.0
TTLPG335	35.0 $\pm$ 2.0	251.0 $\pm$ 12.0	2.0
TTLPG340	40.0 $\pm$ 2.5	286.0 $\pm$ 14.0	2.0
TTLPG345	45.0 $\pm$ 3.0	321.0 $\pm$ 16.0	2.0
TTLPG350	50.0 $\pm$ 3.5	356.0 $\pm$ 17.0	2.0
TTLPG364	64.0 $\pm$ 4.0	454.0 $\pm$ 23.0	2.0

Delay Characteristics measured at $V_{CC} = 5.0V$ and $T_a = 25^\circ C$, no load.


Delay time measured at 1.5V level.

Rise Time measured @ 0.8V to 2.0V levels.

For minimum input pulse width -- contact factory.




SCHEMATIC

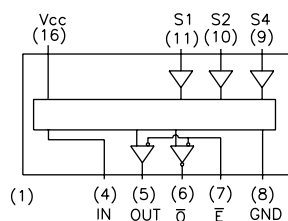

TTLPG
16-pin DIP

CASCADE EXAMPLE


Example of 6-bit cascade with 63 steps of 1.0 ns delay with an inherent (or reference) delay of 12.0 ns (2×6.0 ns).

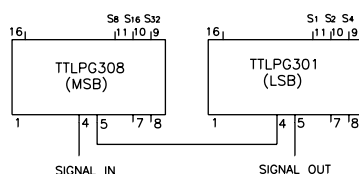

Notes

- Only the pins specified in the schematics are provided with each package.
- Pin numbers shown are for reference only and are not necessarily marked on unit.
- Lead material is electro tin plated (alloy 42) or solder dipped.
- All specifications are subject to change without notice.

MECHANICAL OUTLINE

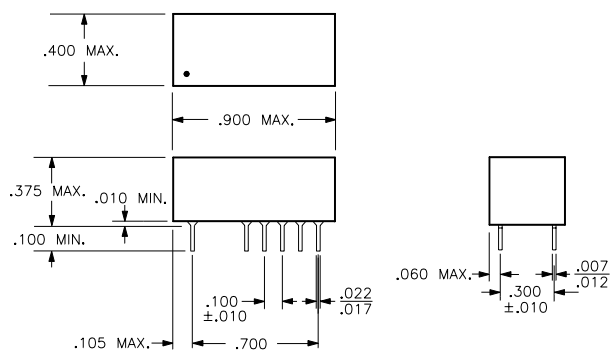

TTLPG-9

Delay Characteristics measured at $V_{CC} = 5.0V$, $25^{\circ}C$, no load.
 Delay Tolerance ± 2 ns or 5%, whichever is greater.
 Rise time measured @ 0.8V to 2.0V levels.
 For minimum input pulse width -- contact factory.