



PRODUCT NUMBER
SEE TABLE

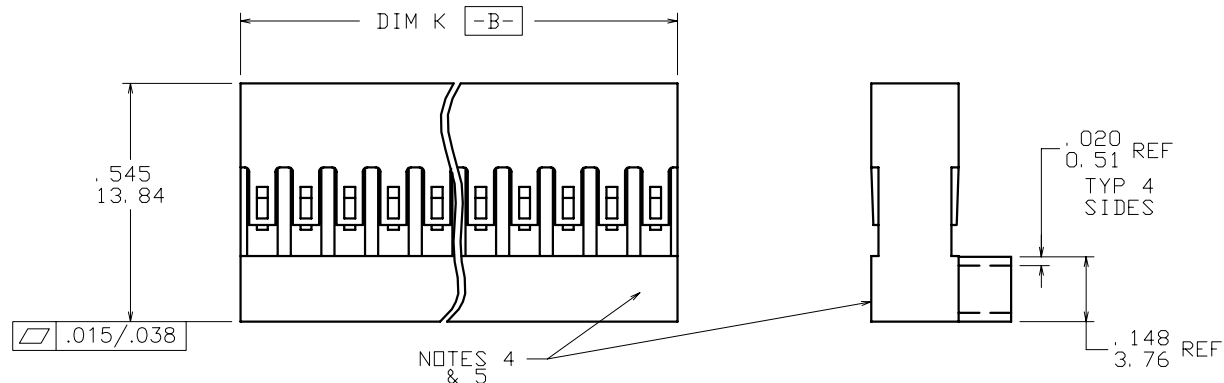


NOTES:

- PIN LENGTH TO BE .210/5.33 MIN
RECOMMENDED PIN LENGTH IS
.225±.015/5.72±0.38.
- MOLDING MATERIAL: MODIFIED
POLYPHENYLENE ETHER
COLOR-BLACK UL 94V-0
- MAY BE USED WITH PRODUCT LINE
NO. 65268 STYLE M.
- ALL MARKINGS FOR MILITARY PART
NUMBERS ARE TO BE PER MIL-STD-1285.
SEE TABULATION.
- PLACE DESC PART NO. AND CAGE NO.
ON PACKAGING LABEL. PRODUCT LENGTH
IS TOO SMALL TO MARK PART.
- APPLICABLE SPECIFICATIONS:
BUS-12-067: PRODUCT SPECIFICATION
TA-75: CRIMPING INSTRUCTIONS (TERMINALS
MUST BE CRIMPED PROPERLY FOR
SATISFACTORY LATCHING).
TA-531: INSTALLING AND REMOVING TERMINALS
- PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS
DESCRIBED IN GS-22-008.
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED
TO MANUFACTURING SOLDER PROCESS.
- EUROPEAN CUSTOMERS SHOULD ORDER PART
NUMBERS WITH AN 'E' SUFFIX AS SHOWN IN TABLE
TO CONTINUE TO BE SUPPLIED BY THE EUROPEAN
PLANT. SEE DRAWING 65846EUR.

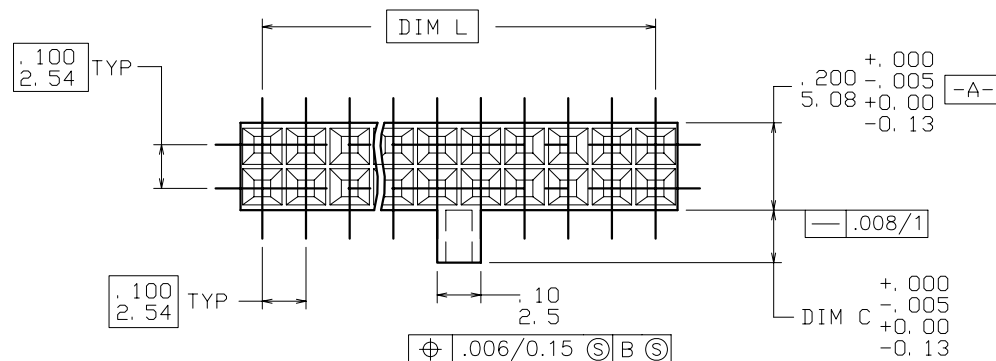

mat'l. code SEE NOTE 2				surface ASME Y14.5 ✓		tolerance ASME Y14.5	projection INCH/MM	product family PV HOUSINGS		
ltr	ecm no	dr	date	tolerances unless otherwise specified				title		
V	V06-0357	HTB	2006-04-17	angles	XX*01/X*3			MINI LATCH HOUSING DOUBLE ROW POLARIZED		
W	V06-0886	HTB	2006-08-31		XXX*005/XXX*13					
X	V07-0511	HTB	2007-08-07	0°±2°	XXXX*0020/XXX*051		scale 2.5:1	dwg no		
				dr	T. BREWBAKER	2006-04-17		sheet 1 of 3		
				engr	T. BREWBAKER	2006-04-17		65846		
				chr	T. BREWBAKER	2006-04-17		A4		
				appd	T. BREWBAKER	2006-04-17		type Product Customer Drawing		
sheet index	revision sheet	x	x	x	x	x				
		1	2	3						

MILITARY PRODUCT NO.	MADE FROM	MARKING STYLE	DESC P/N	CAGE NO.
65846-001-MIL		D I S C O N T I N U E D		
65846-002-MIL		D I S C O N T I N U E D		
65846-003-MIL		D I S C O N T I N U E D		
65846-004-MIL		D I S C O N T I N U E D		
65846-005-MIL		D I S C O N T I N U E D		
65846-006-MIL		D I S C O N T I N U E D		
65846-007-MIL		D I S C O N T I N U E D		
65846-008-MIL		D I S C O N T I N U E D		
65846-009-MIL		D I S C O N T I N U E D		
65846-010-MIL		D I S C O N T I N U E D		
65846-011-MIL		D I S C O N T I N U E D		
65846-012-MIL		D I S C O N T I N U E D		
65846-013-MIL		D I S C O N T I N U E D		
65846-014-MIL		D I S C O N T I N U E D		
65846-015-MIL		D I S C O N T I N U E D		
65846-016-MIL		D I S C O N T I N U E D		
65846-017-MIL		D I S C O N T I N U E D		
65846-018-MIL		D I S C O N T I N U E D		
65846-019-MIL		D I S C O N T I N U E D		
65846-020-MIL		D I S C O N T I N U E D		
65846-021-MIL		D I S C O N T I N U E D		
65846-022-MIL		D I S C O N T I N U E D		
65846-023-MIL		D I S C O N T I N U E D		
65846-024-MIL		D I S C O N T I N U E D		
65846-025-MIL		D I S C O N T I N U E D		
65846-026-MIL		D I S C O N T I N U E D		
65846-027-MIL		D I S C O N T I N U E D		
65846-028-MIL		D I S C O N T I N U E D		
65846-029-MIL		D I S C O N T I N U E D		
65846-030-MIL		D I S C O N T I N U E D		
65846-031-MIL		D I S C O N T I N U E D		
65846-032-MIL		D I S C O N T I N U E D		
65846-033-MIL		D I S C O N T I N U E D		
65846-034-MIL		D I S C O N T I N U E D		
65846-035-MIL		D I S C O N T I N U E D		

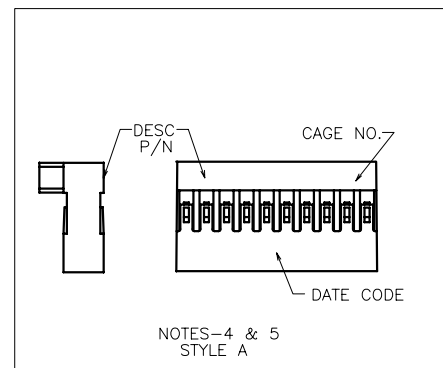

mat'l. code SEE NOTE 2				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family PV HOUSINGS											
ltr		ecn no		dr		date		tolerances unless otherwise specified				title									
x								angles		INCH MM		XX±0.1/X±3		INCH/MM		MINI LATCH HOUSING DOUBLE ROW POLARIZED					
								XXX±0.05/XX±13													
								XXX±0.020/XXX±0.051													
						0°±2'		scale 1:1													
								dr		T. BREWBAKER		2006-04-17								dwg no	
								engr		T. BREWBAKER		2006-04-17				65846		A			
								chr		T. BREWBAKER		2006-04-17									
								appd		T. BREWBAKER		2006-04-17									
sheet index		revision																type		Product Customer Drawing	
		sheet																			