


F95 Series

Standard Conformal Coated Chip



FEATURES

- Compliant to the RoHS3 directive 2015/863/EU
- For High Frequency
- SMD Conformal
- Small and High CV
- 100% Surge Current Tested

APPLICATIONS

- Smartphone
- Tablet PC
- Wireless Module
- E-book




CASE DIMENSIONS:

millimeters (inches)

Code	EIA Code	EIA Metric	L	W	H	A	B	C	D*
A	1207	32 17-16	3.20±0.30 (0.126±0.012)	1.70±0.30 (0.067±0.012)	1.40±0.20 (0.055±0.008)	0.80±0.30 (0.031±0.012)	1.20±0.30 (0.047±0.012)	0.80±0.30 (0.031±0.012)	0.20 (0.008)
B	1411	3528-20	3.50±0.20 (0.138±0.008)	2.80±0.20 (0.110±0.008)	1.80±0.20 (0.071±0.008)	0.80±0.30 (0.031±0.012)	1.20±0.30 (0.047±0.012)	1.10±0.30 (0.043±0.012)	0.20 (0.008)
P	0905	2212-12	2.20±0.30 (0.087±0.012)	1.25±0.30 (0.049±0.012)	1.00±0.20 (0.039±0.008)	0.60±0.30 (0.024±0.012)	0.80±0.30 (0.031±0.012)	0.80±0.30 (0.031±0.012)	0.20 (0.008)
Q	1306	3216-10	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	0.80±0.20 (0.031±0.008)	0.80±0.20 (0.031±0.008)	1.20±0.20 (0.047±0.008)	0.80±0.20 (0.031±0.008)	0.20 (0.008)
R	0905	2212-065	2.20±0.30 (0.087±0.012)	1.25±0.30 (0.049±0.012)	0.65 max. (0.026 max.)	0.60±0.30 (0.024±0.012)	0.80±0.30 (0.031±0.012)	0.50 min. (0.020 min.)	0.20 (0.008)
S	1306	3216-12	3.20±0.30 (0.126±0.012)	1.60±0.30 (0.063±0.012)	1.00±0.20 (0.039±0.008)	0.80±0.30 (0.031±0.012)	1.20±0.30 (0.047±0.012)	0.80±0.30 (0.031±0.012)	0.20 (0.008)
T	1411	3527-12	3.50±0.20 (0.138±0.008)	2.70±0.20 (0.106±0.008)	1.00±0.20 (0.039±0.008)	0.80±0.20 (0.031±0.008)	1.20±0.20 (0.047±0.008)	1.10±0.20 (0.043±0.012)	0.20 (0.008)

*D dimension only for reference

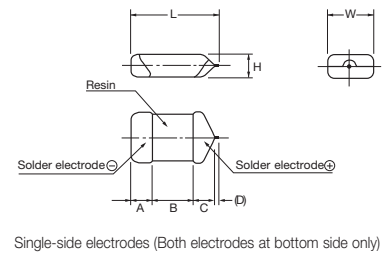

HOW TO ORDER

F95

Type

0G

Rated Voltage

337

Capacitance Code
pF code: 1st two digits
represent significant figures,
3rd digit represents multiplier
(number of zeros to follow)

M

Tolerance
K=±10%
M=±20%

A

Case Size
See table above

□

Packaging
See Tape & Reel
Packaging Section

□□□

Specification Suffix
LZT = Rated temperature
60°C only

AQ2 or Q2

Single Face Electrode

TECHNICAL SPECIFICATIONS

Category Temperature Range:	-55 to +125°C
Rated Temperature:	+85°C
Capacitance Tolerance:	±20%, ±10% at 120Hz
Dissipation Factor:	Refer to next page
ESR 100kHz:	Refer to next page
Leakage Current:	Refer to next page Provided that: After 1 minute's application of rated voltage, leakage current at 85°C 10 times or less than 20°C specified value. After 1 minute's application of rated voltage, leakage current at 125°C 12.5 times or less than 20°C specified value.
Capacitance Change By Temperature	+15% Max. at +125°C +10% Max. at +85°C -10% Max. at -55°C

F95 Series

Standard Conformal Coated Chip



CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage							
μF	Code	4V (0G)	6.3V (0J)	10V (1A)	16V (1C)	20V (1D)	25V (1E)	35V (1V)	50V (1H)
1.0	105						R	P/S	P ^{(M)*}
1.5	155								
2.2	225					P	P/R	A	
3.3	335								
4.7	475				P/R	A/S	A/P/Q/S	B	
6.8	685								
10	106			P/R ^(M)	A/P/Q/S	A/B/S	A/B		
15	156			P	A/S				
22	226		R ^(M)	A/P ^(M) /Q/S	A/B/Q/S/T	B			
33	336		P ^(M)	A/P ^(M) /Q/S	B/T	B			
47	476		P ^(M)	A/B/P ^(M) /S/T	B				
68	686		P ^(M)	B					
100	107	A/P/S	A/B/P ^(M) /Q/S/T	A/B/T					
150	157	B/P ^(M)	B						
220	227	A/B/Q/S/T	B						
330	337	A/B/T	B						
470	477	B	B						
680	687								

Released ratings (M tolerance only)

*Rated temperature 60°C only. Please contact KYOCERA AVX when you need detail spec.

Please contact to your local KYOCERA AVX sales office when these series are being designed in your application.

RATINGS & PART NUMBER REFERENCE

Part Number	Case Size	Capacitance (μF)	Rated Voltage (V)	DCL (μA)	DF @ 120Hz (%)	ESR @ 100kHz (Ω)	100kHz RMS Current (mA)				*1 ΔC/C (%)	MSL
							25°C	60°C	85°C	125°C		
4 Volt												
F950G107#AAAQ2	A	100	4	4.0	12	0.5	387	—	349	155	*	3
F950G107#PAAQ2	P	100	4	4.0	30	1.2	158	—	142	63	±15	3
F950G107#SAAQ2	S	100	4	4.0	14	0.8	274	—	246	110	*	3
F950G157#BAAQ2	B	150	4	6.0	14	0.4	461	—	415	184	*	3
F950G157#MPAAQ2	P	150	4	12.0	31	1.1	165	—	149	66	±20	3
F950G227#AAAQ2	A	220	4	8.8	25	0.8	306	—	276	122	±15	3
F950G227#BAAQ2	B	220	4	8.8	16	0.4	461	—	415	184	*	3
F950G227#QAAQ2	Q	220	4	8.8	30	1.5	173	—	156	69	±20	3
F950G227#SAAQ2	S	220	4	8.8	30	0.8	274	—	246	110	±15	3
F950G227#TAAQ2	T	220	4	8.8	25	0.6	365	—	329	146	*	3
F950G337#AAAQ2	A	330	4	13.2	40	0.8	306	—	276	122	±20	3
F950G337#BAAQ2	B	330	4	13.2	30	0.6	376	—	339	151	±15	3
F950G337#TAAQ2	T	330	4	13.2	40	0.8	316	—	285	126	±20	3
F950G477#BAAQ2	B	470	4	18.8	40	0.4	461	—	415	184	±20	3
6.3 Volt												
F950J336#MPAAQ2	P	33	6.3	2.1	14	1.1	165	—	149	66	*	3
F950J226#MRAAQ2	R	22	6.3	1.4	20	2.0	112	—	101	45	±20	3
F950J476#MPAAQ2	P	47	6.3	3.0	20	1.1	165	—	149	66	±15	3
F950J686#MPAAQ2	P	68	6.3	4.3	25	1.2	158	—	142	63	±15	3
F950J107#AAAQ2	A	100	6.3	6.3	14	0.5	387	—	349	155	*	3
F950J107#BAAQ2	B	100	6.3	6.3	14	0.4	461	—	415	184	*	3
F950J107#MPAAQ2	P	100	6.3	12.6	35	1.2	158	—	142	63	±20	3
F950J107#QAAQ2	Q	100	6.3	6.3	30	1.1	202	—	182	81	±20	3
F950J107#SAAQ2	S	100	6.3	6.3	20	0.9	258	—	232	103	±15	3
F950J107#TAAQ2	T	100	6.3	6.3	14	0.6	365	—	329	146	*	3
F950J157#BAAQ2	B	150	6.3	9.5	18	0.4	461	—	415	184	*	3
F950J227#BAAQ2	B	220	6.3	13.9	30	0.4	461	—	415	184	*	3
F950J337#BAAQ2	B	330	6.3	20.8	35	0.6	376	—	339	151	±20	3
F950J477#BAAQ2	B	470	6.3	59.2	40	0.5	412	—	371	165	±20	3
10 Volt												
F951A106#PAAQ2	P	10	10	1.0	8	3.0	100	—	90	40	*	3
F951A106#MRAAQ2	R	10	10	1.0	18	3.0	91	—	82	37	±20	3
F951A156#PAAQ2	P	15	10	1.5	10	3.0	100	—	90	40	*	3
F951A226#AAAQ2	A	22	10	2.2	6	0.9	289	—	260	115	*	3
F951A226#MPAAQ2	P	22	10	2.2	14	3.0	100	—	90	40	*	3
F951A226#QAAQ2	Q	22	10	2.2	10	2.0	150	—	135	60	*	3
F951A226#SAAQ2	S	22	10	2.2	10	1.1	234	—	210	93	*	3
F951A336#AAAQ2	A	33	10	3.3	10	0.8	306	—	276	122	*	3
F951A336#MPAAQ2	P	33	10	3.3	20	3.0	100	—	90	40	±15	3
F951A336#QAAQ2	Q	33	10	3.3	18	3.0	122	—	110	49	±15	3
F951A336#SAAQ2	S	33	10	3.3	10	1.1	234	—	210	93	*	3
F951A476#AAAQ2	A	47	10	4.7	10	0.8	306	—	276	122	*	3

F95 Series

Standard Conformal Coated Chip



RATINGS & PART NUMBER REFERENCE

Part Number	Case Size	Capacitance (μF)	Rated Voltage (V)	DCL (μA)	DF @ 120Hz (%)	ESR @ 100kHz (Ω)	100kHz RMS Current (mA)				*1 ΔC/C (%)	MSL
							25°C	60°C	85°C	125°C		
F951A476#BAAQ2	B	47	10	4.7	8	0.4	461	—	415	184	*	3
F951A476#MPAAQ2	P	47	10	4.7	30	3.0	100	—	90	40	±20	3
F951A476#SAAQ2	S	47	10	4.7	14	1.1	234	—	210	93	±15	3
F951A476#TAAQ2	T	47	10	4.7	12	0.8	316	—	285	126	*	3
F951A686#BAAQ2	B	68	10	6.8	12	0.4	461	—	415	184	*	3
F951A107#AAAQ2	A	100	10	10.0	35	1.0	274	—	246	110	±15	3
F951A107#BAAQ2	B	100	10	10.0	14	0.4	461	—	415	184	*	3
F951A107#TAAQ2	T	100	10	10.0	20	0.6	365	—	329	146	±15	3
16 Volt												
F951C475#PAAQ2	P	4.7	16	0.8	10	4.0	87	—	78	35	*	3
F951C475#RAAQ2	R	4.7	16	0.8	12	6.0	65	—	58	26	±20	3
F951C106#AAAQ2	A	10	16	1.6	6	1.4	231	—	208	93	*	3
F951C106#PAAQ2	P	10	16	1.6	10	4.0	87	—	78	35	*	3
F951C106#QAAQ2	Q	10	16	1.6	8	3.0	122	—	110	49	*	3
F951C106#SAAQ2	S	10	16	1.6	8	2.0	173	—	156	69	*	3
F951C156#AAAQ2	A	15	16	2.4	8	1.4	231	—	208	93	*	3
F951C156#SAAQ2	S	15	16	2.4	8	2.0	173	—	156	69	*	3
F951C226#AAAQ2	A	22	16	3.5	8	1.4	231	—	208	93	*	3
F951C226#BAAQ2	B	22	16	3.5	6	0.5	412	—	371	165	*	3
F951C226#QAAQ2	Q	22	16	3.5	12	3.0	122	—	110	49	*	3
F951C226#SAAQ2	S	22	16	3.5	10	2.0	173	—	156	69	±15	3
F951C226#TAAQ2	T	22	16	3.5	8	1.4	239	—	215	96	*	3
F951C336#BAAQ2	B	33	16	5.3	8	0.5	412	—	371	165	*	3
F951C336#TAAQ2	T	33	16	5.3	11	1.5	231	—	208	92	±10	3
F951C476#BAAQ2	B	47	16	7.5	10	0.6	376	—	339	151	*	3
20 Volt												
F951D225#PAAQ2	P	2.2	20	0.5	6	6.0	71	—	64	28	*	3
F951D475#AAAQ2	A	4.7	20	0.9	6	1.5	224	—	201	89	*	3
F951D475#SAAQ2	S	4.7	20	0.9	8	4.0	122	—	110	49	*	3
F951D106#AAAQ2	A	10	20	2.0	8	1.5	224	—	201	89	*	3
F951D106#BAAQ2	B	10	20	2.0	6	0.8	326	—	293	130	*	3
F951D106#SAAQ2	S	10	20	2.0	10	4.0	122	—	110	49	±10	3
F951D226#BAAQ2	B	22	20	4.4	8	0.8	326	—	293	130	*	3
F951D336#BAAQ2	B	33	20	6.6	15	1.0	292	—	262	117	*	3
25 Volt												
F951E105#RAAQ2	R	1	25	0.5	10	10.0	50	—	45	20	±10	3
F951E225#PAAQ2	P	2.2	25	0.6	8	6.0	71	—	64	28	±15	3
F951E225#RAAQ2	R	2.2	25	0.6	15	15.0	41	—	37	16	±20	3
F951E475#AAAQ2	A	4.7	25	1.2	8	2.0	194	—	174	77	*	3
F951E475#PAAQ2	P	4.7	25	1.2	10	8.0	61	—	55	24	±15	3
F951E475#QAAQ2	Q	4.7	25	1.2	10	4.0	106	—	95	42	±15	3
F951E475#SAAQ2	S	4.7	25	1.2	8	4.0	122	—	110	49	*	3
F951E106#AAAQ2	A	10	25	2.5	12	2.0	194	—	174	77	±15	3
F951E106#BAAQ2	B	10	25	2.5	6	0.9	307	—	227	123	*	3
35 Volt												
F951V105#PAAQ2	P	1	35	0.5	8	10.0	55	—	49	22	±10	3
F951V105#SAAQ2	S	1	35	0.5	6	8.0	87	—	78	35	*	3
F951V225#AAAQ2	A	2.2	35	0.8	6	4.4	131	—	118	52	*	3
F951V475#BAAQ2	B	4.7	35	1.7	6	1.6	230	—	207	92	*	3
50 Volt												
F951H105#MPALZTQ2	P	1	50	1.0	8	7.0	65	59	—	26	±20	3

*1: ΔC/C Marked “**”

#: “M” for ±20% tolerance, “K” for ±10% tolerance. When you need K tolerance for the part numbers which have M tolerance only, please contact to your local KYOCERA AVX sales office.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

Item	All Case (%)
Damp Heat	±10
Temperature cycles	±5
Resistance soldering heat	±5
Surge	±5
Endurance	±10

F95 Series


Standard Conformal Coated Chip

QUALIFICATION TABLE


TEST	F95 series (Temperature range -55°C to +125°C)	
	Condition	
Damp Heat (Steady State)	At 40°C, 90 to 95% R.H., 500 hours (No voltage applied) Capacitance Change Refer to the table above (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Temperature Cycles	At -55°C / +125°C, 30 minutes each, 5 cycles Capacitance Change Refer to the table above(*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Resistance to Soldering Heat	10 seconds reflow at 260°C, 10 seconds immersion at 260°C. Capacitance Change Refer to the table above (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Surge	After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors shall meet the characteristic requirements in the table above. Capacitance Change Refer to the table above (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Endurance	After 2000 hours' application of rated voltage at 85°C, capacitors shall meet the characteristic requirements in the table above. Capacitance Change Refer to the table above (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Shear Test	After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on a substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.	
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of capacitor, the pressure strength is applied with a specified jig at the center of substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.	

SOLID ELECTROLYTIC CAPACITOR ROADMAP

SERIES LINE UP : CONVENTIONAL SMD MnO₂

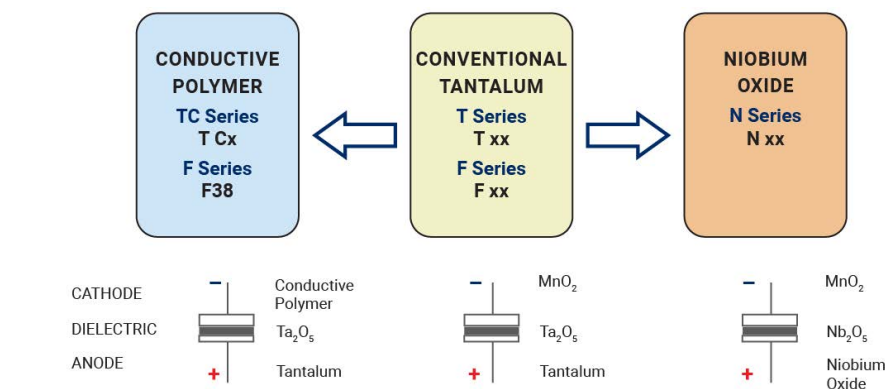

FIVE CAPACITOR CONSTRUCTION STYLES

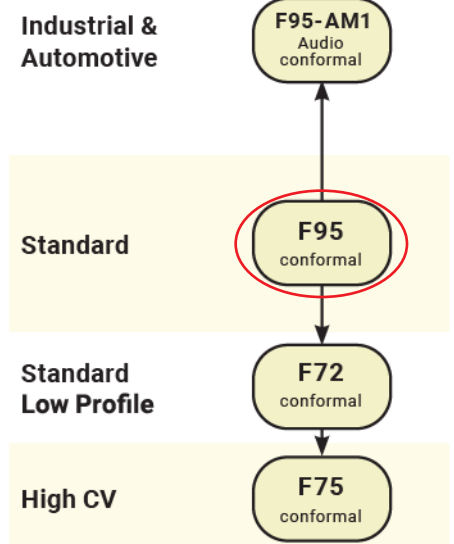

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera AVX:

F950J686KSAAQ3	F951C335MPAAQ2	F951A686KBAAQ3	F951D685KQAAQ3	F951A476KBAAQ3	
F950G337KBAAQ3	F950J336KAAQ3	F951A336KAAQ3	F951V335KBAAQ3	F950G107KAAQ3	
F951D106KBAAQ3	F951C106KAAQ3	F950G476KSAAQ3	F950G337KTAAQ3	F951C336KBAAQ3	
F951E105KSAAQ3	F951C226KBAAQ3	F951V105KSAAQ3	F950J107KTAAQ3	F950G227KBAAQ3	
F951C156KAAQ3	F951E225KAAQ3	F951D475KAAQ3	F951V475KBAAQ3	F951C106KSAAQ3	
F950G476KQAAQ3	F950J476KQAAQ3	F950J476KAAQ3	F951E155KSAAQ3	F950G686KAAQ3	
F951A226KAAQ3	F951D106KAAQ3	F951C476KBAAQ3	F951E225KSAAQ3	F950J336KQAAQ3	
F951A226KSAAQ3	F951A226KQAAQ3	F951C156KSAAQ3	F951V155KAAQ3	F950G107KSAAQ3	
F951A107KBAAQ3	F950J476KSAAQ3	F951E475KAAQ3	F951A336KQAAQ3	F951C226KQAAQ3	F951A336MAA
F951D225KSAAQ3	F951E475KSAAQ3	F950J107KBAAQ3	F950J107KAAQ3	F951A476KAAQ3	
F951D335KAAQ3	F950G227KAAQ3	F950J107KSAAQ3	F950G157KBAAQ3	F951C106KQAAQ3	
F951D226KBAAQ3	F951C226KTAAQ3	F950J336KSAAQ3	F950J227KBAAQ3	F951A336KSAAQ3	
F951D475KSAAQ3	F950G227KSAAQ3	F950J157KBAAQ3	F951A107KTAAQ3	F951V105KAAQ3	
F951A475MPAAQ2	F951A476KSAAQ3	F951E335KAAQ3	F950G686KSAAQ3	F950J686KAAQ3	
F950G227KTAAQ3	F951C226KAAQ3	F951D685KAAQ3	F951V225KAAQ3	F951E106KBAAQ3	
F951A476KTAAQ3	F950G476KAAQ3				