

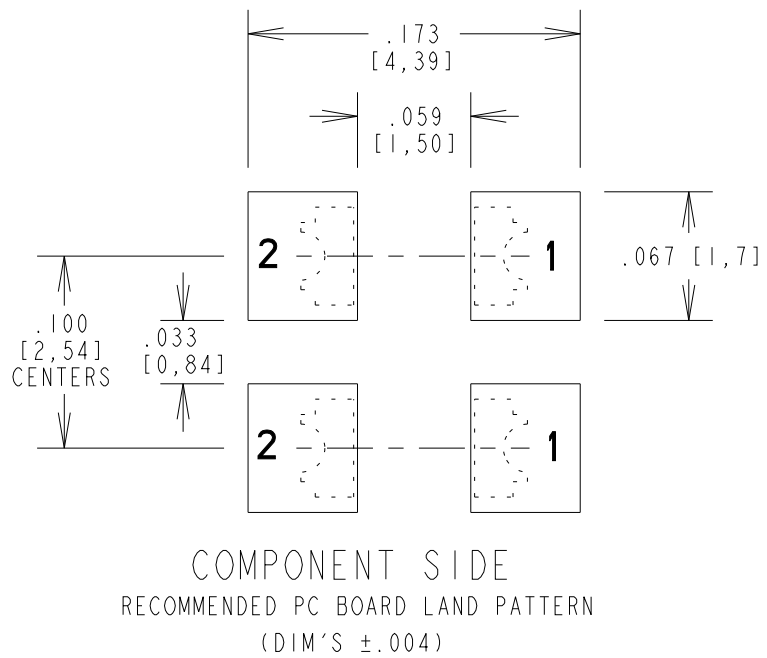


PART NUMBER	LED COLOR	OPERATING CHARACTERISTICS AT 25°C AMBIENT							OPERATING CHARACTERISTICS AT 25°C AMBIENT							REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE	
595-2101-002F	RED	CHARACTERISTICS		MIN	TYP	MAX	UNITS	TEST CONDITIONS	CHARACTERISTICS		MIN	TYP	MAX	UNITS	TEST CONDITIONS	A	—	NEW RELEASE	TWC	N.O.	MES	1-12-06	
595-2101-007F		LUMINOUS INTENSITY	RED		25.0		mc d	I _F = 20 mA	LUMINOUS INTENSITY	AlInGaP YELLOW		41.0		mc d	I _F = 10 mA	B	—	MSL "3" WAS "4" IN NOTE 7, ADDED P/N'S 595-2201-002F, 595-2701-002F TO MSL "2a" IN NOTE 7, ADDED P/N'S 595-2101-002F, 595-2301-002F, 595-2401-002F, AND 595-2501-002F TO MSL "3" IN NOTE 7, REMOVED REFLOW SOLDERING SPECS FROM ABSOLUTE MAXIMUM RATINGS.	KLJ	N.O.	MES	4-15-08	
595-2101-013F		FORWARD VOLTAGE	RED		1.7	2.0	V	I _F = 20 mA	FORWARD VOLTAGE	AlInGaP YELLOW		2.02	2.4	V	I _F = 20 mA								
595-2701-002F	REVERSE VOLTAGE	RED	4			V	I _R = 100 μA	REVERSE CURRENT	AlInGaP YELLOW			100	μA	V _R = 5V									
595-2701-007F	AlInGaP YELLOW	PEAK WAVELENGTH	RED		660		nm		PEAK WAVELENGTH	AlInGaP YELLOW		592		nm		C	—	REVISED HI. INT. GREEN SPECS	AJF	KLJ	NO	3-16-10	
595-2701-013F		DOMINANT WAVELENGTH	RED		647		nm		DOMINANT WAVELENGTH	AlInGaP YELLOW		582	590	597	nm								
		ABSOLUTE MAXIMUM RATINGS AT 25°C AMBIENT							ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT														
		POWER DISSIPATION			RED		60		mW		POWER DISSIPATION			AlInGaP YELLOW		81		mW					
		DERATE LINEARLY FROM 25°C			RED		0.42		mA/°C		DERATE LINEARLY FROM 75°C (* FROM 55°C)			AlInGaP YELLOW		0.58 *		mA/°C					
		CONTINUOUS FORWARD CURRENT			RED		30		mA		CONTINUOUS FORWARD CURRENT			AlInGaP YELLOW		30		mA					
		PEAK FORWARD CURRENT (1/10 DUTY CYCLE, 0.1 ms PULSE WIDTH)			RED		70		mA		OPERATING TEMPERATURE			AlInGaP YELLOW		-30 TO +85		°C					
		STORAGE TEMPERATURE			RED		-30 TO 80		°C		STORAGE TEMPERATURE			AlInGaP YELLOW		-40 TO +100		°C					
		REMOVED OBSOLETE P/Ns 595-2301-002F, 595-2401-013F, 595-2301-007F, 595-2301-013F, 595-2401-002F, 595-2401-007F, WITH THERE LED SPECS AND NOTES							REMOVED OBSOLETE P/Ns 595-2301-002F, 595-2401-013F, 595-2301-007F, 595-2301-013F, 595-2401-002F, 595-2401-007F, WITH THERE LED SPECS AND NOTES														
		REMOVED OBSOLETE P/Ns 595-2201-002F, 595-2201-013F, 595-2201-007F, 595-2501-013F, 595-2501-002F, 595-2501-007F, WITH THERE LED SPECS AND NOTES							REMOVED OBSOLETE P/Ns 595-2201-002F, 595-2201-013F, 595-2201-007F, 595-2501-013F, 595-2501-002F, 595-2501-007F, WITH THERE LED SPECS AND NOTES														
		REMOVED OBSOLETE P/Ns 595-2201-002F, 595-2201-013F, 595-2201-007F, 595-2501-013F, 595-2501-002F, 595-2501-007F, WITH THERE LED SPECS AND NOTES							REMOVED OBSOLETE P/Ns 595-2201-002F, 595-2201-013F, 595-2201-007F, 595-2501-013F, 595-2501-002F, 595-2501-007F, WITH THERE LED SPECS AND NOTES														
		REMOVED OBSOLETE P/Ns 595-2201-002F, 595-2201-013F, 595-2201-007F, 595-2501-013F, 595-2501-002F, 595-2501-007F, WITH THERE LED SPECS AND NOTES							REMOVED OBSOLETE P/Ns 595-2201-002F, 595-2201-013F, 595-2201-007F, 595-2501-013F, 595-2501-002F, 595-2501-007F, WITH THERE LED SPECS AND NOTES														


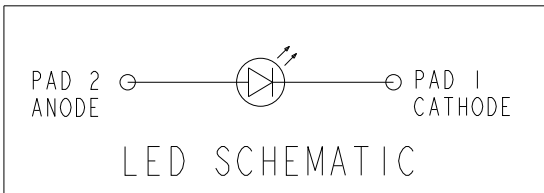


NOTES:

- 1- MILLIMETER DIMENSIONS SHOWN FOR REFERENCE ONLY.
- 2- PAD NUMBERS ARE FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
- 3- STORAGE CONDITIONS FOR TAPED PRODUCT: RE-TAPING MAY BE NECESSARY FOR PRODUCTS STORED MORE THAN TWELVE MONTHS.
- 4- ORDER QUANTITY IS LED ASSEMBLIES, NOT REELS
- 5- ...-002 SUFFIX MEANS PARTS ARE PACKED ON A 20 pc SAMPLE STRIP
...-007 SUFFIX MEANS PARTS ARE PACKED ON A 7 INCH REEL, 600 pcs/REEL
...-013 SUFFIX MEANS PARTS ARE PACKED ON A 13 INCH REEL, 2300 pcs/REEL
- 6- DIALIGHT PART NUMBERS = 595-2x01-002F, 595-2x01-007F, 595-2x01-013F
- 7- PLACE MOISTURE SENSITIVITY LEVEL "3" LABEL ON 595-2701-002F, 595-2701-007F, 595-2701-013F. 595-2101-002F, 595-2101-007F, 595-2101-013F VACUUM SEAL BAG.
- 8- PACKAGE ONE HUMIDITY INDICATOR CARD (P/N 9100-999-0662-99) PER BAG.
- 9- PER LENS INSPECTION PROCEDURE 01-225 THIS AREA CAN HAVE PORTIONS MISSING OF UP TO 50%. NON-CRITICAL AREA BELOW LENS.

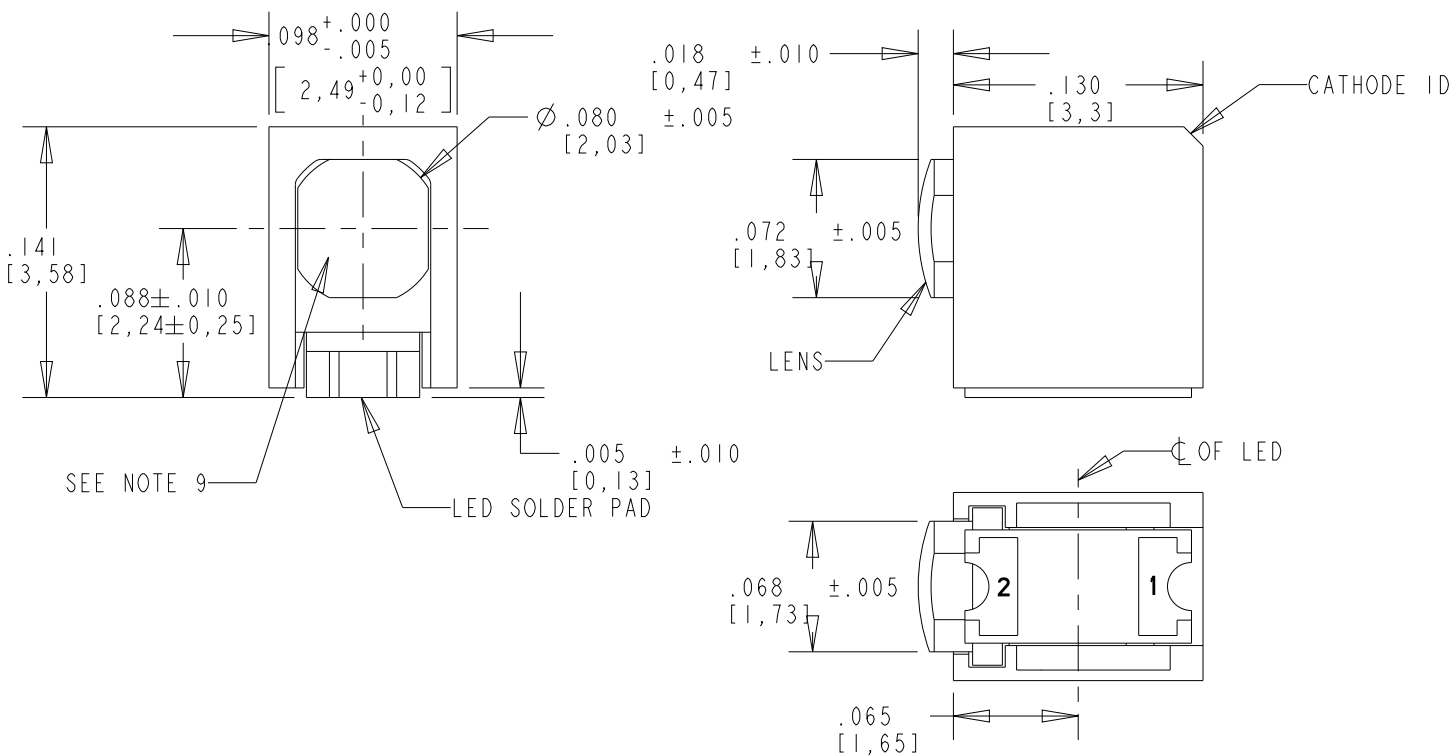


RoHS COMPLIANT REFLOW PROFILES

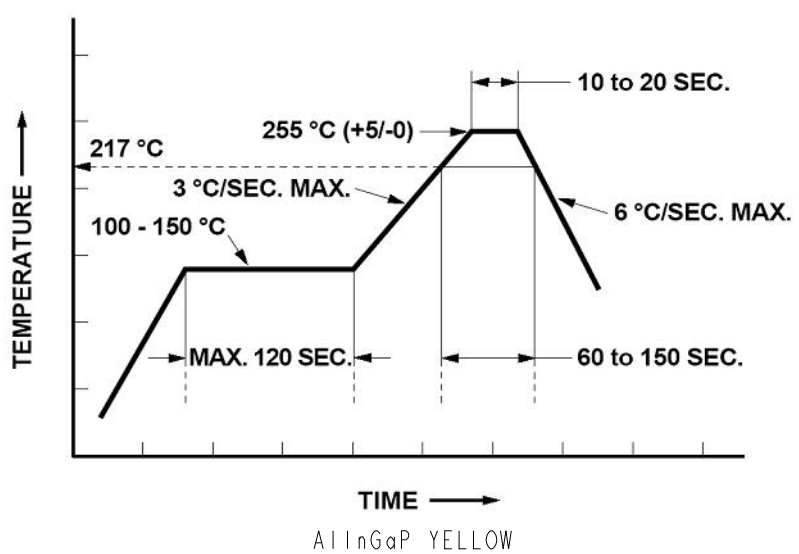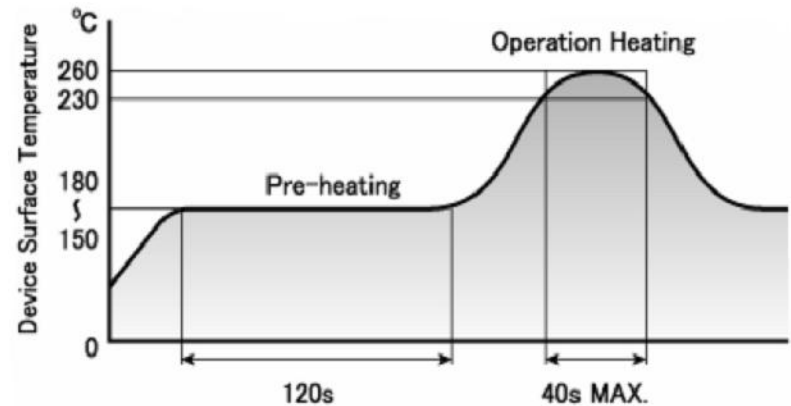


RoHS Compliant 595-2X01-0XXF Surface Mount CBI

Part Numbers with the "F" suffix ending are RoHS Compliant.
Example: 595-2101-002F
Packaging is marked with "RoHS Compliant" label or equivalent markings. Parts can be wave soldered, dip soldered, or hand soldered using typical lead-free soldering process with max 260°C temp. for 5 sec.


TAPING SPECIFICATION

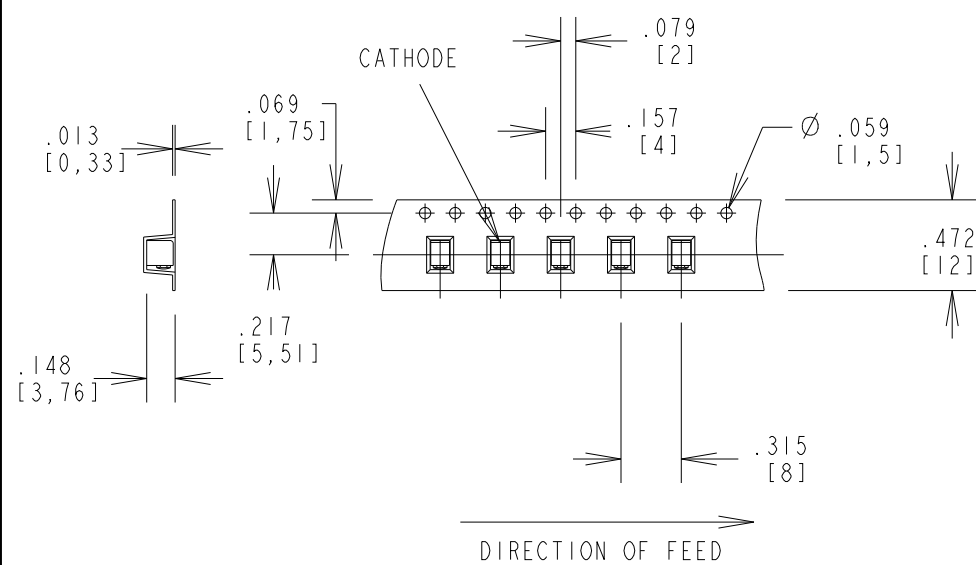

TOLERANCE: .004 UNLESS OTHERWISE SPECIFIED
MILLIMETER DIMENSIONS SHOWN FOR REFERENCE ONLY

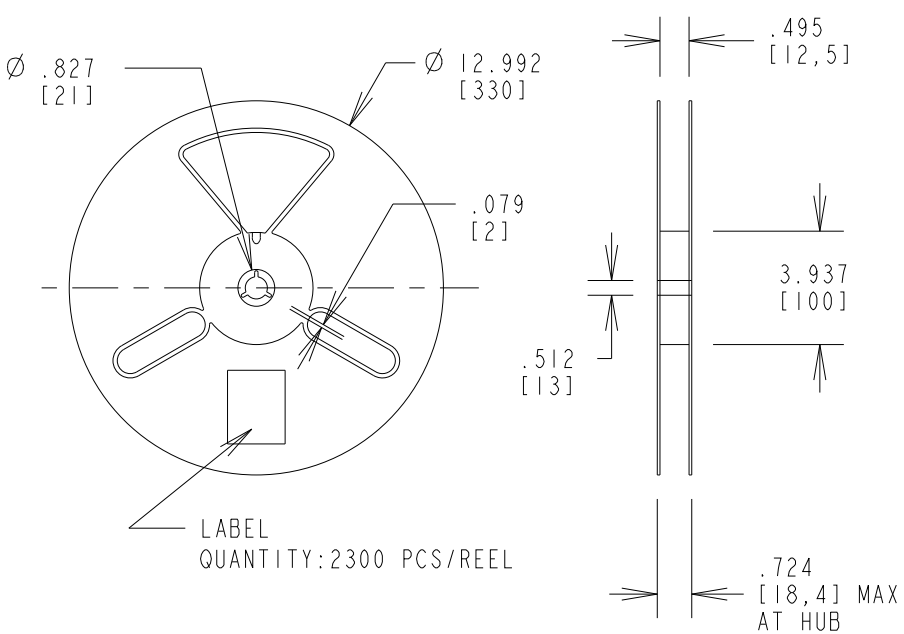

13 INCH DIA. REEL SPECIFICATIONS

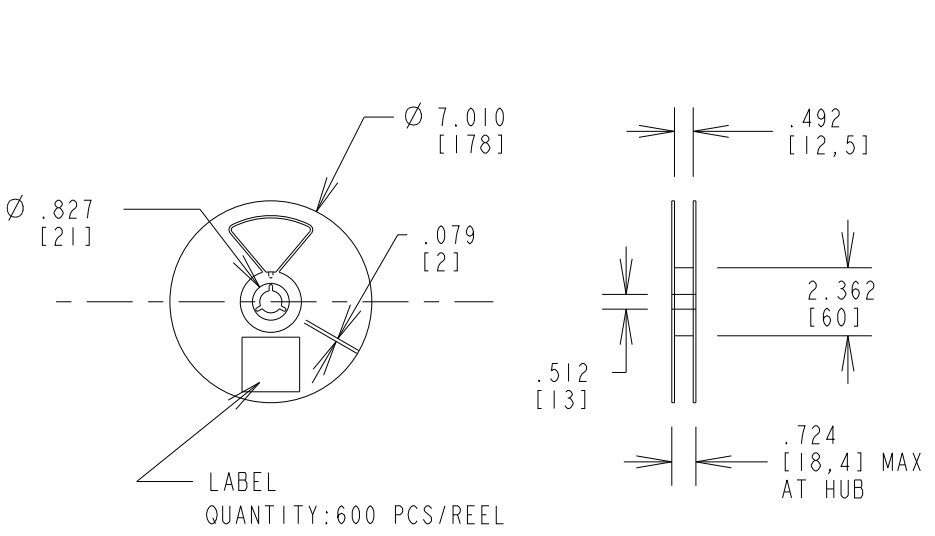

7 INCH DIA. REEL SPECIFICATIONS

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: DRAWING SCALE ALL DIM'S IN: INCHES (MM)	DRAWING NUMBER C-17345	REV E
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	TITLE SURFACE MOUNT CBI RoHS COMPLIANT	MATERIAL
FINISH:	Dialight	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727
FSCM 83330	SHEET 1 OF 1	FAMILY TABLE:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[595-2401-007](#) [595-2301-007](#) [595-2301-007F](#) [595-2401-007F](#) [595-2101-007F](#) [595-2101-007](#) [595-2301-013](#) [595-2401-002F](#) [595-2301-013F](#) [595-2201-002F](#) [595-2501-002F](#) [595-2301-002F](#) [595-2701-002F](#) [595-2201-007F](#) [595-2701-007F](#) [595-2101-002F](#) [595-2101-013F](#) [595-2401-013F](#) [595-2401-00-2HF](#) [595-2902-013F](#) [595-2602-013F](#) [595-2902-007F](#) [595-2602-007F](#) [595-2602-00-2HF](#) [595-2602-00-7HF](#) [595-2602-01-3HF](#) [595-2902-01-3HF](#) [595-2902-00-7HF](#) [595-2902-00-2HF](#) [595-2301-802F](#) [595-2701-013F](#) [595-2201-013F](#) [595-2501-007F](#) [595-2101-00-2SF](#) [595-2101-00-7SF](#) [595-2101-01-3SF](#) [595-2301-00-2SF](#) [595-2301-00-7SF](#) [595-2301-01-3SF](#) [595-2401-00-2SF](#) [595-2401-00-7SF](#) [595-2401-01-3SF](#) [595-2201-00-2HF](#) [595-2201-01-3HF](#) [595-2301-00-2HF](#) [595-2701-00-7HF](#) [595-2701-01-3HF](#) [595-2301-806F](#) [595-2301-00-7HF](#) [595-2201-00-7HF](#) [595-2201-013H-FBRF](#) [595-2701-00-2HF](#) [595-2401-00-7HF](#) [595-2101-00-7HF](#) [595-2101-01-3HF](#) [595-2401-01-3HF](#) [595-2701-013H-FBRF](#) [595-2101-00-2HF](#) [595-2301-01-3HF](#) [5952-301-007S-NF](#) [595-2301-01-3NF](#) [5952-401-002S-NF](#) [5952-301-002H-NF](#) [595-2401-00-2NF](#) [595-2301-00-2NF](#) [5952-401-013H-NF](#) [5952-301-002S-NF](#) [595-2301-00-7NF](#) [5952-401-013S-NF](#) [595-2401-01-3NF](#) [5952-401-007S-NF](#) [595-2401-00-7NF](#) [5952-401-002H-NF](#) [5952-301-013H-NF](#) [595-2902-01-3SF](#) [595-2602-01-3SF](#) [595-2902-00-2SF](#) [5952-301-013S-NF](#) [5952-301-007H-NF](#) [5952-401-007H-NF](#) [595-2902-00-7SF](#) [595-2602-00-7SF](#) [595-2602-00-2SF](#)