
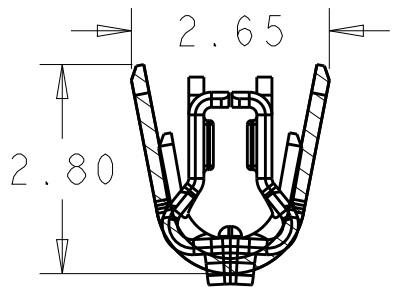
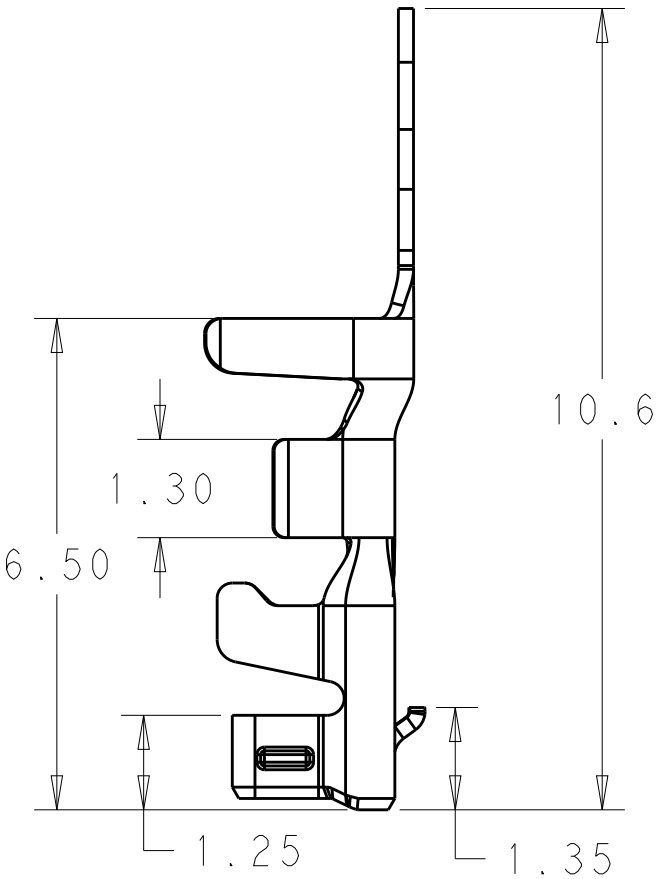


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECR-15-009171	25JUN15	O.C	D.Z


- 1

MATERIAL: PHOSPHOR BRONZE.
- 2


FINISH: PRE-TIN.
- 3 DESIGNED FOR USE IN HOUSINGS 1969442-() OR 1744417-().
- 4 CONTACTS COATED WITH ANTI-FRETTING LUBRICANT.
- 5 CONTACT IS RoHS COMPLIANT.
- 6 WIRE RANGE: 0.13~0.36mm2 [26-22 AWG] STRANDED.
7. INSULATION RANGE: 1.30~1.91

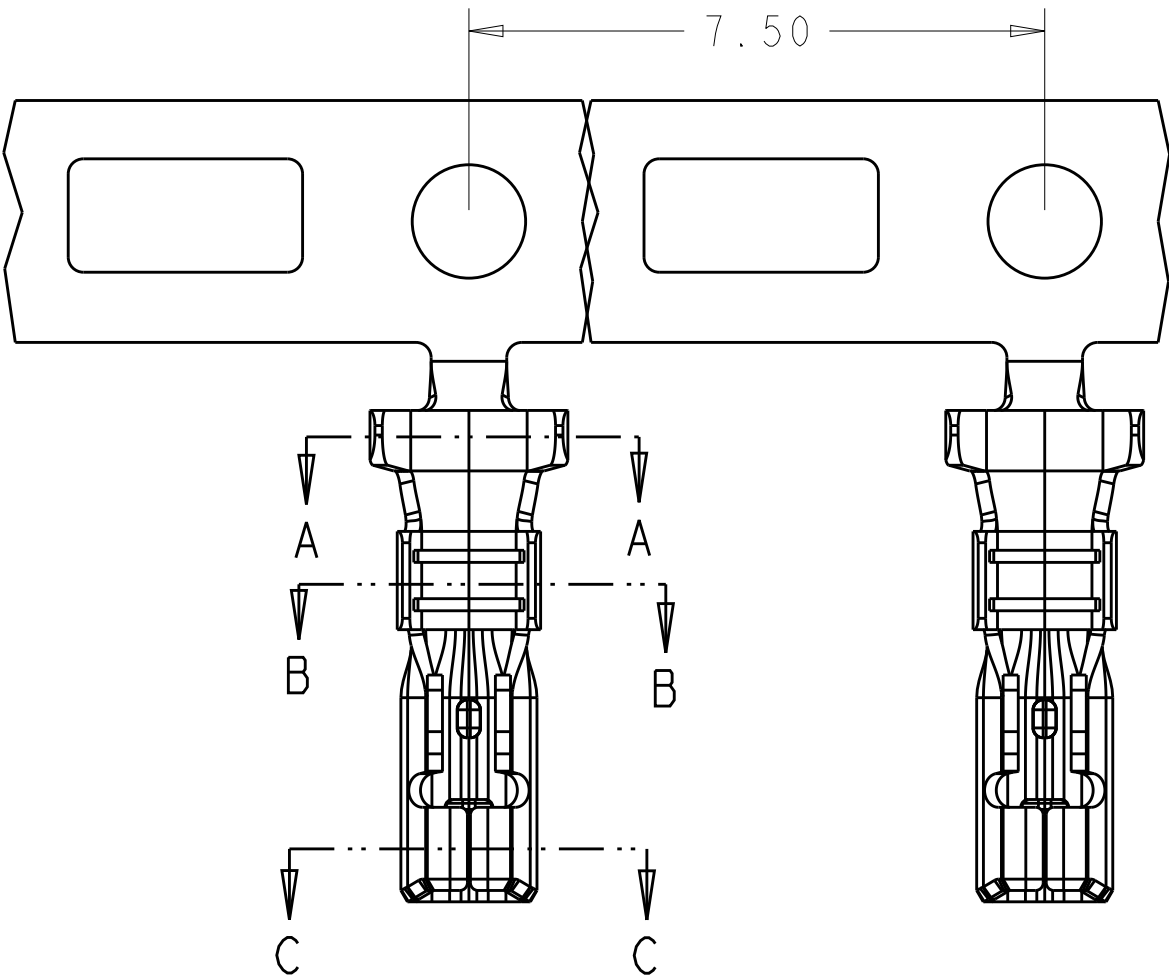

SECTION A-A

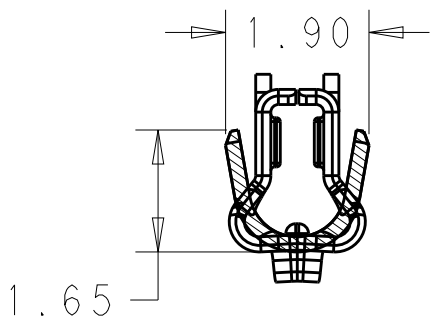

SECTION B-B

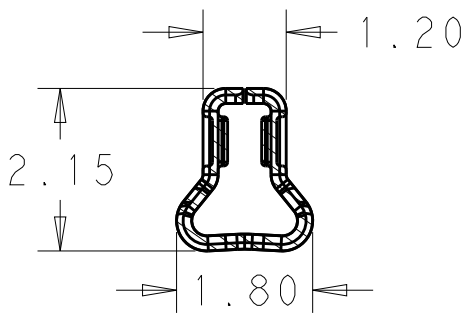

SECTION C-C

2232905-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN OTTO CHEN 25JUN15	TE TE Connectivity LOW INSERTION FORCE CONTACT, ECONOMY POWER 2.5, RECEPTACLE			
DIMENSIONS:	mm	CHK DANIEL Z 26JUN15				
		APVD DANIEL Z 26JUN15				
		PRODUCT SPEC 108-2418				
MATERIAL	-	APPLICATION SPEC 114-13315	SIZE A2	CAGE CODE 00779	DRAWING NO C-2232905	RESTRICTED TO -
		WEIGHT -	SCALE N/A		SHEET 1	OF 1
		Customer Drawing			REV A	