

5




4

3


2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

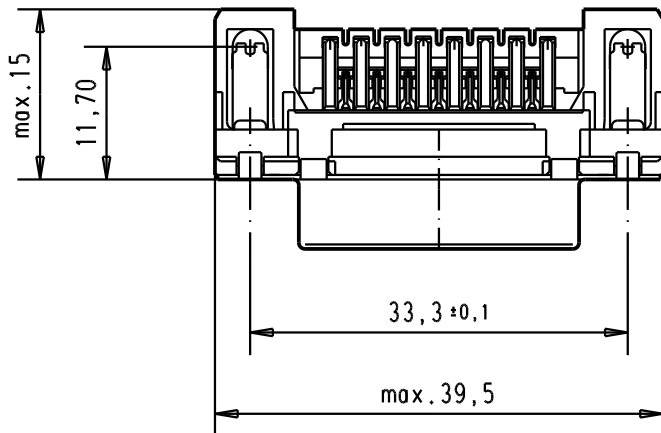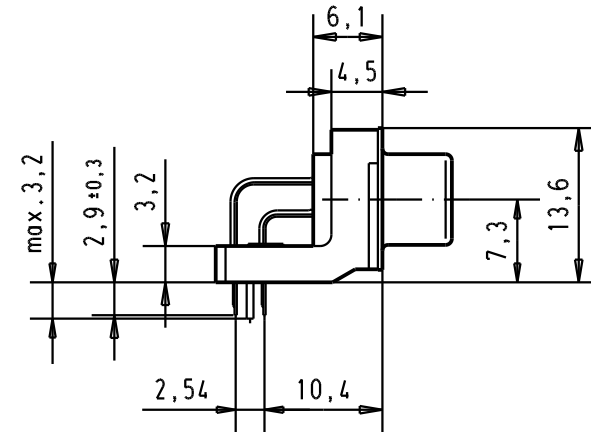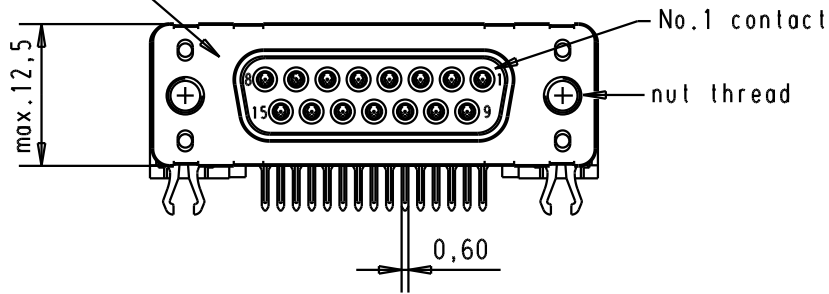


PCB layout hole component side

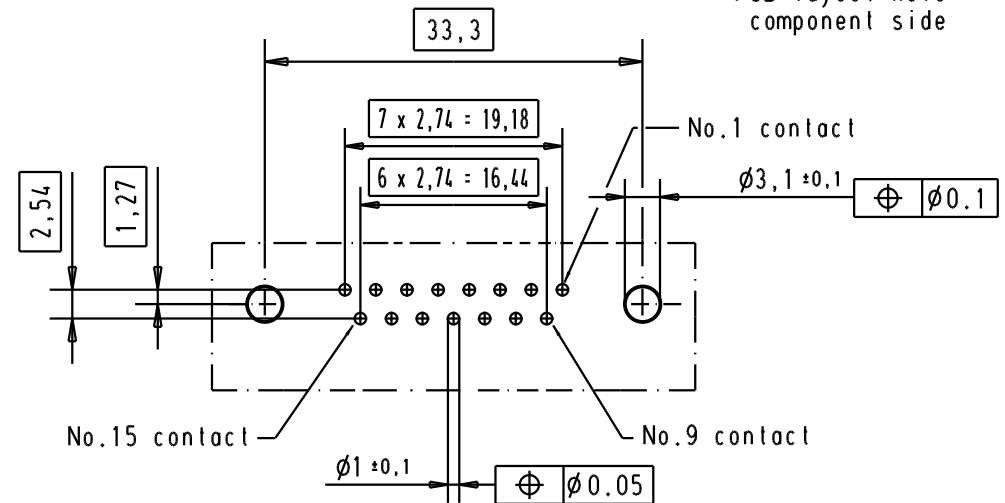

Connector retention and insertion forces on the PCB = 25 / 80 newtons

|                |            |                   |       |           |         |
|----------------|------------|-------------------|-------|-----------|---------|
| 09 66 252 3611 | M 3        | 1                 |       |           |         |
| 09 66 252 6611 | M 3        | 2                 |       |           |         |
| 09 66 252 7611 | M 3        | 3                 |       |           |         |
| 09 66 252 3612 | 4-40 UNC   | 1                 | 31892 | 05/05/04  | JH      |
| 09 66 252 6612 | 4-40 UNC   | 2                 | 31084 | 04/SEP/02 | YT      |
| 09 66 252 7612 | 4-40 UNC   | 3                 | 27960 | 05/dec/00 | ALSPACE |
| Part number    | Nut thread | Performance level | Mod.  | Dat.      | Name    |

HARTING EURL  
F-95972 Paris



All Dim. in mm  
Orig. Size DIN A 4

D-Sub 15 poles standard angle female, solder pin with nut and grounding board lock.

Maßstab/  
Scale

1.5:1

TB 0966252x61x

Blatt/ Page

5/5

Sub.