


.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

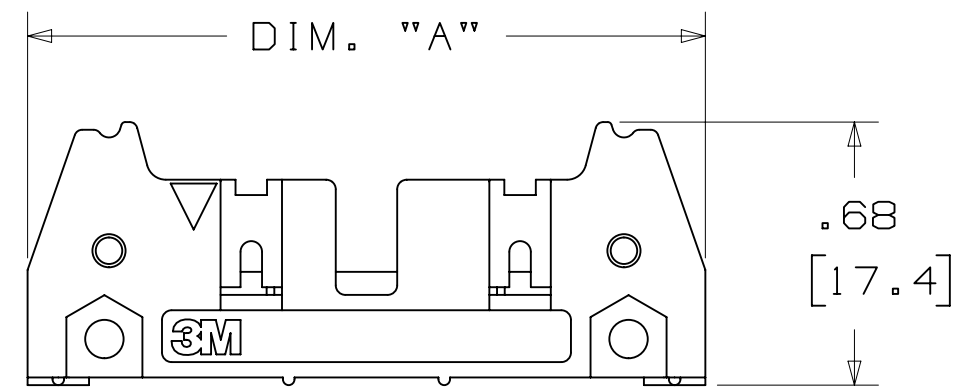

Technical drawing of a mechanical part showing dimensions and tolerances:

- Top left dimension: $.573 \pm .010$
- Top left dimension in brackets: $[14.55 \pm 0.25]$
- Left side dimension: $.08$
- Left side dimension in brackets: $[2.0]$
- Right side dimension: (1.07)
- Right side dimension in brackets: $[(27.2)]$

DESIGN REFERENCE						NEXT ASSEMBLY						REV				ECO				ISSUE DATE AND DESCRIPTION								DFT				CHKD					
ACCESS CODES												CAST				IGL				ONE				DATE AUG 05, 2014				MFG				DATE					
																								APPLY R. SCHERER				DATE SEP 05, 2014									
DIVISION						INTERCONNECT SOLUTIONS						DIVISION CODE						EMSD						© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.													
DO NOT SCALE DRAWING						SCALE <u>2</u> <u>1</u>						TOLERANCES EXCEPT AS NOTED						3M Center St. Paul, MN 55144																			
																		TITLE																			
						THIRD ANGLE PROJECTION						INCHES .0 .00 .01 .000 .005 .0000						X .100 LATCH/EJECTOR, STRAIGHT & RA																			
INTERPRET PER ASME Y14.5 - 2009						MILLIMETERS .0 .01 .03 .005 .013 .0005						CAGE NUMBER						SIZE DRAWING NO. D78-5100-0771-5						REV. H													
MAX SURFACE ROUGHNESS						DRAWN SURFACES						MARKED ONLY						MODEL						3000 SERIES						DET. LISTS YES X NO SHT 1 OF 4							

UL[®]
US
UL FILE NO: E68080

Imaged: H.1 3/6/2015 12:53 PM UTC-06:00

3M™ THREE-WALL HEADER, 3000 SERIES

.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE



TABLE 1							
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
10	3793	1.26 [32.1]	1.105 [28.04]	.865 [21.97]	.71 [18.0]	BC	10
14	3314	1.46 [37.2]	1.305 [33.12]	1.065 [27.05]	.91 [23.1]	BC	14
16	3408	1.56 [39.7]	1.405 [35.66]	1.165 [29.59]	1.01 [25.6]	ABC	16
20	3428	1.76 [44.8]	1.604 [40.74]	1.365 [34.67]	1.21 [30.7]	ABC	20
26	3429	2.06 [52.4]	1.905 [48.36]	1.665 [42.29]	1.51 [38.3]	ABC	26
34	3431	2.46 [62.6]	2.305 [58.52]	2.065 [52.45]	1.91 [48.5]	ABC	34
40	3432	2.76 [70.2]	2.605 [66.14]	2.365 [60.07]	2.21 [56.1]	ABC	40
50	3433	3.26 [82.9]	3.105 [78.84]	2.865 [72.77]	2.71 [68.8]	ABC	50
60	3372	3.76 [95.6]	3.605 [91.54]	3.365 [85.47]	3.21 [81.5]	ABC	60
64	3764	3.96 [100.7]	3.805 [96.62]	3.565 [90.55]	3.41 [86.6]	ABC	64

TABLE 2						
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"	PIN CROSS SECTION			DIM. "G"
-1XX2 -2XX2	.062 [1.57] THICK PC BOARD	.112 [2.84]	DIM. "F" .0245+/- .0005 [.622]	DIAGONALS .028+/- .001 [.71]	CORNER RADIUS .0075 REF. [.191]	.035+/- .003 [.89] SEE NOTE 5
-1X03 -2X03	.094 [2.39] TO .125 [3.18] THICK PC BOARD	.155 [3.94]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 REF. [.191]	.035+/- .003 [.89]



DESIGN REFERENCE
NEXT ASSEMBLY

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

MAX SURFACE ROUGHNESS
LISTED SURFACES
MARKED ONLY

INTERCONNECT SOLUTIONS

SCALE 4/1

INTERPRET PER ASME Y14.5 - 2009

TOLERANCES EXCEPT AS NOTED

INCHES
0 ± .01
.000 ± .005
.0000 ±

MILLIMETERS
0 ± .3
.00 ± .13
.000 ±

ANGLES

3M

© 3M COPYRIGHT 2015
3M Center
St. Paul,
MN 55144

THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE 3M PROPERTY AND MAY NOT BE REPRODUCED OR FURTHER DISTRIBUTED WITHOUT 3M PERMISSION, OR USED OR DISCLOSED OTHER THAN FOR 3M AUTHORIZED PURPOSES. ALL RIGHTS RESERVED.

TITLE
HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA

CAGE NUMBER
D78-5100-0771-5

MODEL
3000 SERIES

REV. ECO
DATE
AUG 05, 2014

ISSUE DATE AND DESCRIPTION
REVISED AND REDRAWN

DRFT
DATE
SEP 05, 2014

CHKD
DATE
AUG 05, 2014

APPR
R. SCHERER

DATE
SEP 05, 2014

H 60056
MAR 06, 2015
REVISE ORDERING NUMBER

JNC RS

G 56068
AUG 05, 2014
REVISED AND REDRAWN

JNC RS

REV. ECO
DATE
AUG 05, 2014

ISSUE DATE AND DESCRIPTION
REVISED AND REDRAWN

DRFT
DATE
SEP 05, 2014

CHKD
DATE
AUG 05, 2014

APPR
R. SCHERER

DATE
SEP 05, 2014

3M

© 3M COPYRIGHT 2015
3M Center
St. Paul,
MN 55144

THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE 3M PROPERTY AND MAY NOT BE REPRODUCED OR FURTHER DISTRIBUTED WITHOUT 3M PERMISSION, OR USED OR DISCLOSED OTHER THAN FOR 3M AUTHORIZED PURPOSES. ALL RIGHTS RESERVED.

TITLE
HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA

CAGE NUMBER
D78-5100-0771-5

MODEL
3000 SERIES

REV. ECO
DATE
AUG 05, 2014

ISSUE DATE AND DESCRIPTION
REVISED AND REDRAWN

DRFT
DATE
SEP 05, 2014

CHKD
DATE
AUG 05, 2014

APPR
R. SCHERER

DATE
SEP 05, 2014

H 60056
MAR 06, 2015
REVISE ORDERING NUMBER

JNC RS

G 56068
AUG 05, 2014
REVISED AND REDRAWN

JNC RS


.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE




THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.

BOTH SNAP-IN AND ROLL PIN LATCHES MAY BE ORDERED SEPARATELY. SNAP-IN AND ROLL PIN STYLE LATCHES ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT. IF ORDERING SNAP-IN OR ROLL PIN STYLE LATCHES SEPARATELY, PLEASE USE THE BELOW CHART.

```
* SELECTIVE PIN REMOVAL (ATA OR OTHER COMPATABILITY)
* WIRE WRAP TAILS STYLE
```



NOTE :
SNAP-IN LATCHES CAN ONLY BE ORDERED
SEPARATELY AND ARE THE CUSTOMERS
RESPONSIBILITY TO INSTALL.



NOTE:
INSERT POST INTO ONE MOUNTING
HARDWARE HOLE ON BOTTOM OF HEADER.
SET POST TO PROTRUDE .115 [2.92]

KINKED TAIL DETAIL:


- KINK IS LOCATED .05" BELOW BOTTOM SURFACE OF PLASTIC.
- EXTERNAL RADIUS OF KINK TOWARD PART CENTERLINE.

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO
ADHERE KEYS.

Imaged: H.1 3/6/2015 12:53 PM UTC-06:00


3M™ THREE-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

MOUNTING HARDWARE

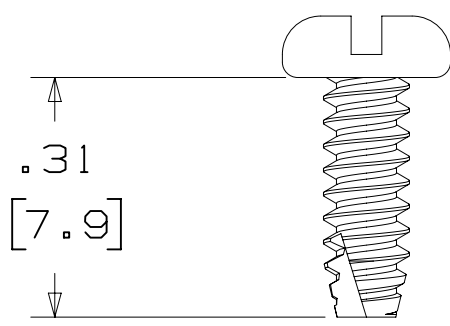


3341-5

(INSTALL FROM BOTTOM OF BOARD)
PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL

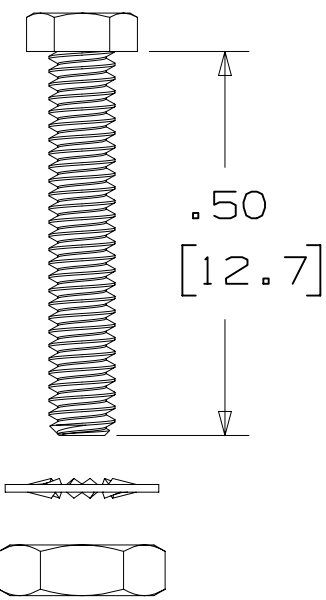

3341-6

HEX HEAD BOLT, NUT AND WASHER:
BOLT - #2-56 X 1/2"
MATERIAL: STAINLESS STEEL

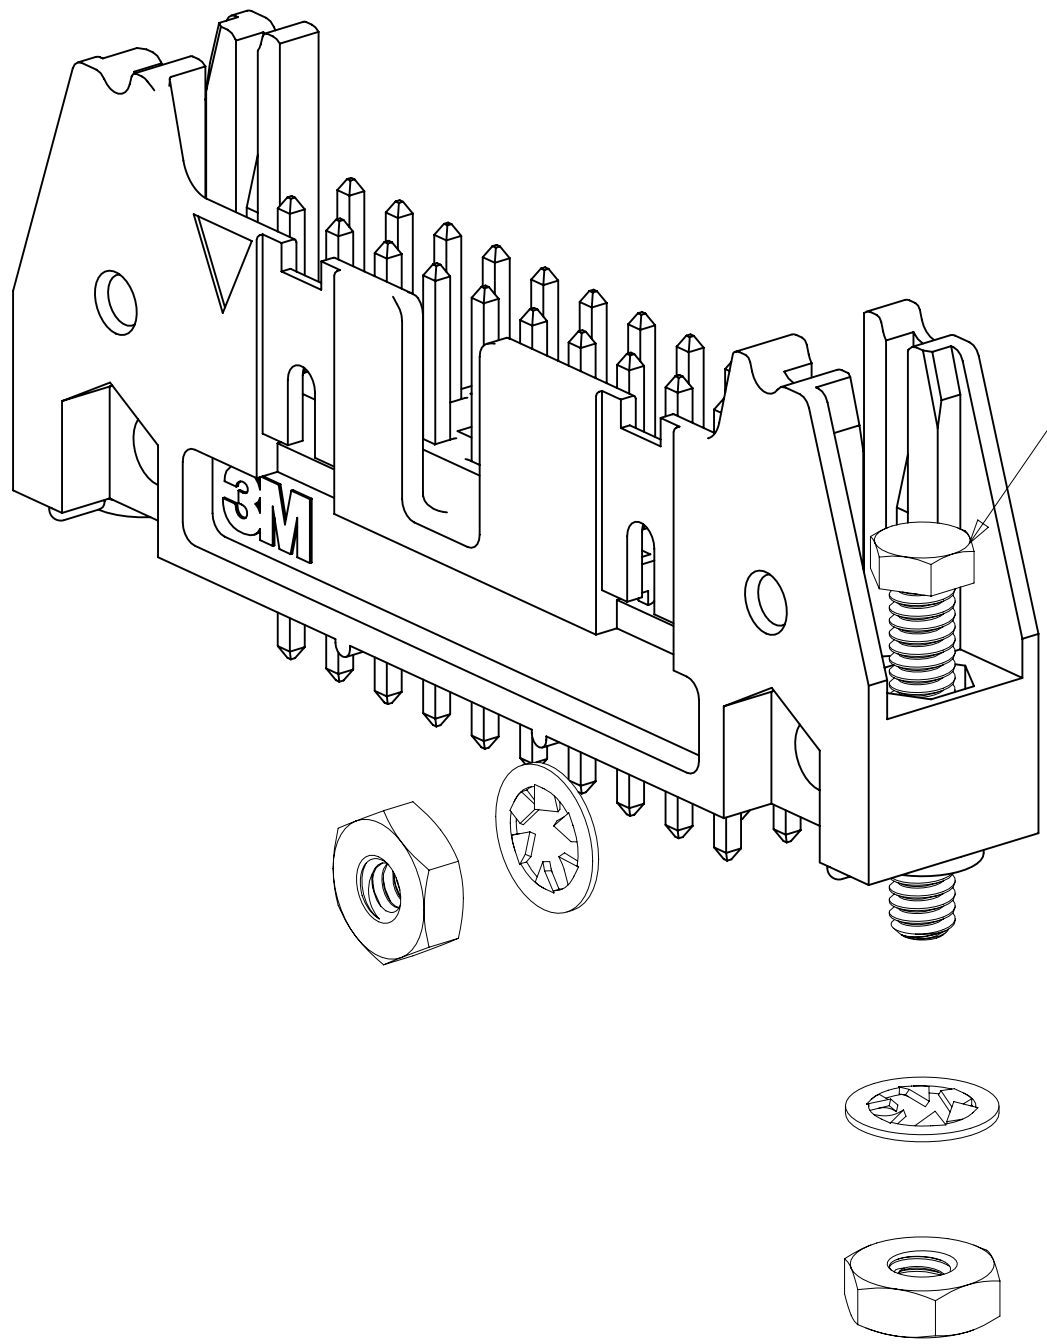


STRAIGHT VERSION INSTALL
(MUST BE INSERTED PRIOR TO
LATCH INSTALL)


RIGHT ANGLE VERSION INSTALL

3341-6

#2-56 NUT AND BOLT
TORQUE FOR EACH BOLT: 1.25 - 3.125 INCH LBS.

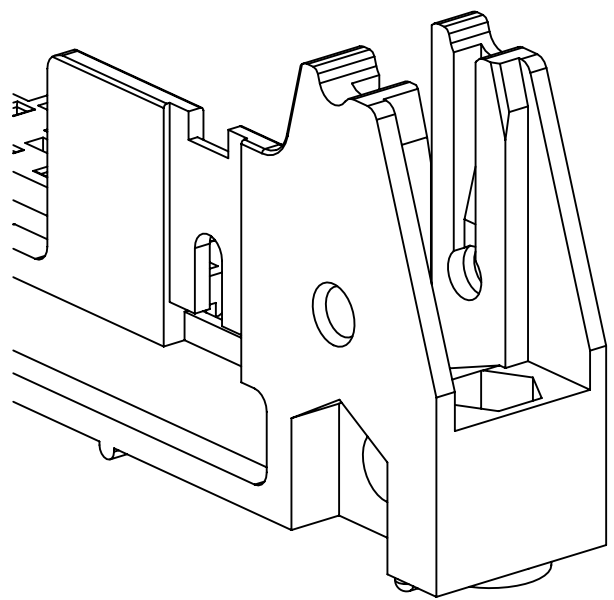

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.



3341-5

H		60056		MAR 06,2015		JNC		RS			
G		56068		AUG 05,2014		JNC		RS			
REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD	
DRFT		CASTIGLIONE		DATE		AUG 05,2014		MFG		DATE	
CHKD				DATE				APPR		DATE	
								R. SCHERER		SEP 05,2014	
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2015							
Interconnect Solutions		EMSD		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.							
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		TITLE					
				INCHES		HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA					
THIRD ANGLE PROJECTION				MILLIMETERS							
INTERPRET PER ASME Y14.5 - 2009				.00		.3					
MAX SURFACE ROUGHNESS				.00		.13					
✓ ☐ MARKED ONLY				.000		.005					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
		</									