

# $\pm 250V$ Input Range $G = 1, 10$ , Micropower, Difference Amplifier

## FEATURES

- Pin Selectable Gain of 1 or 10
- High Common Mode Voltage Range:  
 $85V$  Window ( $V_S = 5V, 0V$ )  
 $\pm 250V$  ( $V_S = \pm 15V$ )
- Common Mode Rejection Ratio: 70dB Min
- Input Protection to  $\pm 350V$
- Gain Error: 0.28% Max
- PSRR: 82dB Min
- High Input Impedance:  $2M\Omega$  Differential,  
 $500k\Omega$  Common Mode
- Micropower:  $120\mu A$  Max Supply Current
- Wide Supply Range: 2.7V to 36V
- -3dB Bandwidth: 100kHz
- Rail-to-Rail Output
- 8-Pin SO Package

## APPLICATIONS

- Battery Cell Voltage Monitoring
- High Voltage Current Sensing
- Signal Acquisition in Noisy Environments
- Input Protection
- Fault Protected Front Ends
- Level Sensing
- Isolation

## DESCRIPTION

The LT<sup>®</sup>1990 is a micropower precision difference amplifier with a very high common mode input voltage range. It has pin selectable gains of 1 or 10. The LT1990 operates over a  $\pm 250V$  common mode voltage range on a  $\pm 15V$  supply. The inputs are fault protected from common mode voltage transients up to  $\pm 350V$  and differential voltages up to  $\pm 500V$ . The LT1990 is ideally suited for both high side and low side current or voltage monitoring.


On a single 5V supply, the LT1990 has an adjustable 85V input range, 70dB min CMRR and draws less than  $120\mu A$  supply current. The rail-to-rail output maximizes the dynamic range, especially important for single supplies as low as 2.7V.

The LT1990 is specified for single 3V, 5V and  $\pm 15V$  supplies over both commercial and industrial temperature ranges. The LT1990 is available in the 8-pin SO package.

LT, LT, LTC and LTM are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

Full-Bridge Load Current Monitor

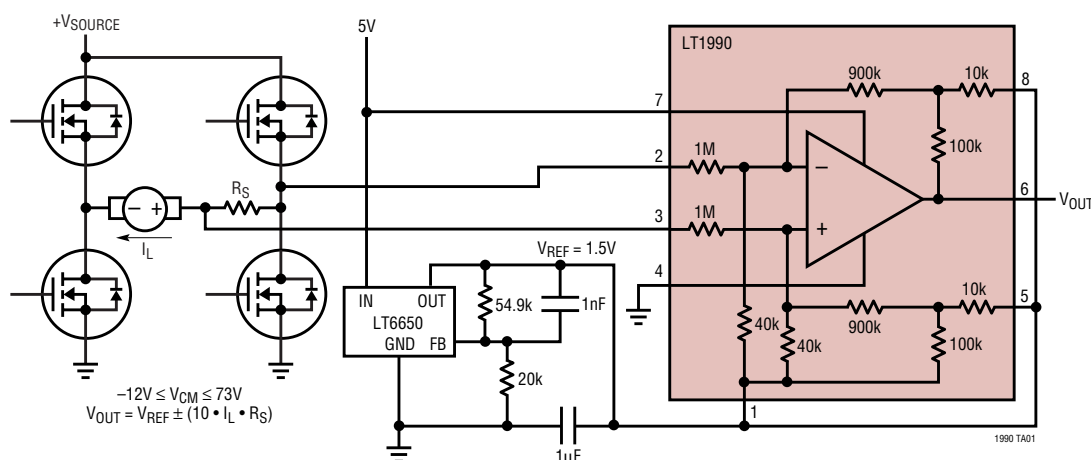

1990fb

## ABSOLUTE MAXIMUM RATINGS

(Notes 1, 2)

|                                               |                                |
|-----------------------------------------------|--------------------------------|
| Total Supply Voltage ( $V^+$ to $V^-$ ) ..... | 36V                            |
| Input Voltage Range                           |                                |
| Continuous .....                              | $\pm 250V$                     |
| Transient (0.1s) .....                        | $\pm 350V$                     |
| Differential .....                            | $\pm 500V$                     |
| Output Short-Circuit Duration (Note 3) .....  | Indefinite                     |
| Operating Temperature Range (Note 4)          |                                |
| LT1990C .....                                 | $-40^\circ C$ to $85^\circ C$  |
| LT1990I .....                                 | $-40^\circ C$ to $85^\circ C$  |
| LT1990H .....                                 | $-40^\circ C$ to $125^\circ C$ |
| Specified Temperature Range (Note 5)          |                                |
| LT1990C .....                                 | $-40^\circ C$ to $85^\circ C$  |
| LT1990I .....                                 | $-40^\circ C$ to $85^\circ C$  |
| LT1990H .....                                 | $-40^\circ C$ to $125^\circ C$ |
| Junction Temperature .....                    | $150^\circ C$                  |
| Storage Temperature Range .....               | $-65^\circ C$ to $150^\circ C$ |
| Lead Temperature (Soldering, 10 sec.) .....   | $300^\circ C$                  |

## PACKAGE/ORDER INFORMATION

| <p>TOP VIEW</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^\circ C</math>, <math>\theta_{JA} = 190^\circ C/W</math></p>                                                                                |                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| ORDER PART NUMBER                                                                                                                                                                                                        | S8 PART MARKING |
| LT1990CS8                                                                                                                                                                                                                | 1990            |
| LT1990IS8                                                                                                                                                                                                                | 1990I           |
| LT1990HS8                                                                                                                                                                                                                | 1990H           |
| LT1990ACS8                                                                                                                                                                                                               | 1990A           |
| LT1990AIS8                                                                                                                                                                                                               | 1990AI          |
| LT1990AHS8                                                                                                                                                                                                               | 1990AH          |
| <p><b>Order Options</b> Tape and Reel: Add #TR<br/>Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF<br/>Lead Free Part Marking: <a href="http://www.linear.com/leadfree/">http://www.linear.com/leadfree/</a></p> |                 |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## 3V/5V ELECTRICAL CHARACTERISTICS

$V_S = 3V, 0V$ ;  $V_S = 5V, 0V$ ;  $R_L = 10k$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ ,  $T_A = 25^\circ C$ , unless otherwise noted. (Note 6)

| SYMBOL     | PARAMETER                                              | CONDITIONS                                                                                                                          | MIN             | TYP                | MAX                | UNITS       |
|------------|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------|--------------------|-------------|
| G          | Gain                                                   | Pins 5 and 8 = Open<br>Pins 5 and 8 = $V_{REF}$                                                                                     |                 | 1<br>10            |                    |             |
| $\Delta G$ | Gain Error                                             | $V_{OUT} = 0.5V$ to $(+V_S) - 0.75V$<br>LT1990, $G = 1$<br>LT1990A, $G = 1$<br>$G = 10$ , $V_S = 5V, 0V$                            |                 | 0.4<br>0.07<br>0.2 | 0.6<br>0.28<br>0.8 | %<br>%<br>% |
| GNL        | Gain Nonlinearity                                      | $V_S = 5V, 0V$ ; $V_{OUT} = 0.5V$ to $4.25V$<br>$G = 1$<br>$G = 10$                                                                 |                 | 0.001<br>0.01      | 0.005              | %<br>%      |
| $V_{CM}$   | Input Voltage Range                                    | Guaranteed by CMRR<br>$V_S = 3V, 0V$ ; $V_{REF} = 1.25V$<br>$V_S = 5V, 0V$ ; $V_{REF} = 1.25V$<br>$V_S = 5V, 0V$ ; $V_{REF} = 2.5V$ | -5<br>-5<br>-38 |                    | 25<br>80<br>47     | V<br>V<br>V |
| CMRR       | Common Mode Rejection Ratio<br>RTI (Referred to Input) | $V_S = 3V, 0V$ (Note 7)<br>$V_{CM} = -5V$ to $25V$ , $V_{REF} = 1.25V$<br>LT1990                                                    | 60              | 68                 |                    | dB          |
|            |                                                        | LT1990A                                                                                                                             | 70              | 75                 |                    | dB          |
|            |                                                        | $V_S = 5V, 0V$<br>$V_{CM} = -5V$ to $80V$ , $V_{REF} = 1.25V$<br>LT1990                                                             | 60              | 68                 |                    | dB          |
|            |                                                        | LT1990A                                                                                                                             | 70              | 75                 |                    | dB          |
|            |                                                        | $V_S = 5V, 0V$ (Note 7)<br>$V_{CM} = -38V$ to $47V$ , $V_{REF} = 2.5V$<br>LT1990                                                    | 60              | 68                 |                    | dB          |
|            |                                                        | LT1990A                                                                                                                             | 70              | 75                 |                    | dB          |

## 3V/5V ELECTRICAL CHARACTERISTICS

$V_S = 3V, 0V$ ;  $V_S = 5V, 0V$ ;  $R_L = 10k$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ ,  $T_A = 25^\circ C$ , unless otherwise noted. (Note 6)

| SYMBOL     | PARAMETER                         | CONDITIONS                                                                                              | MIN     | TYP                             | MAX        | UNITS                  |
|------------|-----------------------------------|---------------------------------------------------------------------------------------------------------|---------|---------------------------------|------------|------------------------|
| $V_{OS}$   | Offset Voltage, RTI               | $G = 1, 10$                                                                                             |         | 0.8                             | 3          | mV                     |
| $e_n$      | Input Noise Voltage, RTI          | $f_0 = 0.1Hz \text{ to } 10Hz$                                                                          |         | 22                              |            | $\mu V_{P-P}$          |
|            | Noise Voltage Density, RTI        | $f_0 = 1kHz$                                                                                            |         | 1                               |            | $\mu V/\sqrt{Hz}$      |
| $R_{IN}$   | Input Resistance                  | Differential<br>Common Mode                                                                             |         | 2<br>0.5                        |            | $M\Omega$<br>$M\Omega$ |
| PSRR       | Power Supply Rejection Ratio, RTI | $V_S = 2.7V \text{ to } 12.7V$ , $V_{CM} = V_{REF} = 1.25V$                                             | 80      | 92                              |            | dB                     |
|            | Minimum Supply Voltage            | Guaranteed by PSRR                                                                                      |         | 2.4                             | 2.7        | V                      |
| $I_S$      | Supply Current                    | (Note 8)                                                                                                |         | 105                             | 120        | $\mu A$                |
| $V_{OL}$   | Output Voltage Swing LOW          | $-IN = V^+$ , $+IN = \text{Half Supply}$ (Note 8)                                                       |         | 30                              | 50         | mV                     |
| $V_{OH}$   | Output Voltage Swing HIGH         | $-IN = 0V$ , $+IN = \text{Half Supply}$<br>$V_S = 3V, 0V$ , Below $V^+$<br>$V_S = 5V, 0V$ , Below $V^+$ |         | 100<br>120                      | 150<br>175 | mV<br>mV               |
| $I_{SC}$   | Output Short-Circuit Current      | Short to GND (Note 9)<br>Short to $V^+$ (Note 9)                                                        | 4<br>13 | 8<br>20                         |            | mA<br>mA               |
| BW         | Bandwidth ( $-3dB$ )              | $G = 1$<br>$G = 10$                                                                                     |         | 100<br>6.5                      |            | kHz<br>kHz             |
| SR         | Slew Rate                         | $G = 1$ , $V_S = 5V, 0V$ , $V_{OUT} = 0.5V \text{ to } 4.5V$                                            |         | 0.5                             |            | $V/\mu s$              |
|            | Settling Time to 0.01%            | 4V Step, $G = 1$ , $V_S = 5V, 0V$                                                                       |         | 45                              |            | $\mu s$                |
| $AV_{REF}$ | Reference Gain to Output          | $G = 1$<br>$G = 10$                                                                                     |         | $1 \pm 0.0007$<br>$1 \pm 0.007$ |            |                        |

The ● denotes the specifications which apply over the temperature range of  $0^\circ C \leq T_A \leq 70^\circ C$ .  $V_S = 3V, 0V$ ;  $V_S = 5V, 0V$ ;  $R_L = 10k$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                        | CONDITIONS                                                                                                                                | LT1990C/LT1990I |          |                      | UNITS                              |
|------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|----------------------|------------------------------------|
|            |                                  |                                                                                                                                           | MIN             | TYP      | MAX                  |                                    |
| $\Delta G$ | Gain Error                       | $V_{OUT} = 0.5V \text{ to } (+V_S) - 0.75V$<br>LT1990, $G = 1$ ●<br>LT1990A, $G = 1$ ●<br>$G = 10$ ●                                      |                 |          | 0.65<br>0.33<br>0.90 | %<br>%<br>%                        |
| G/T        | Gain vs Temperature              | $G = 1$ (Note 10) ●<br>$G = 10$ (Note 10) ●                                                                                               |                 | 2<br>7   | 10<br>20             | ppm/ $^\circ C$<br>ppm/ $^\circ C$ |
| $V_{CM}$   | Input Voltage Range              | Guaranteed by CMRR<br>$V_S = 3V, 0V$ , $V_{REF} = 1.25V$ ●<br>$V_S = 5V, 0V$ , $V_{REF} = 1.25V$ ●<br>$V_S = 5V, 0V$ , $V_{REF} = 2.5V$ ● | -5<br>-5<br>-37 |          | 25<br>80<br>48       | V<br>V<br>V                        |
| CMRR       | Common Mode Rejection Ratio, RTI | $V_S = 3V, 0V$ (Note 7)<br>$V_{CM} = -5V \text{ to } 25V$ , $V_{REF} = 1.25V$<br>LT1990 ●<br>LT1990A ●                                    |                 | 58<br>68 |                      | dB<br>dB                           |
|            |                                  | $V_S = 5V, 0V$<br>$V_{CM} = -5V \text{ to } 80V$ , $V_{REF} = 1.25V$<br>LT1990 ●<br>LT1990A ●                                             |                 | 58<br>68 |                      | dB<br>dB                           |
|            |                                  | $V_S = 5V, 0V$ (Note 7)<br>$V_{CM} = -38V \text{ to } 47V$ , $V_{REF} = 2.5V$<br>LT1990 ●<br>LT1990A ●                                    |                 | 58<br>68 |                      | dB<br>dB                           |
|            |                                  |                                                                                                                                           |                 |          |                      |                                    |
|            |                                  |                                                                                                                                           |                 |          |                      |                                    |
|            |                                  |                                                                                                                                           |                 |          |                      |                                    |

1990fb

## 3V/5V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$ .  $V_S = 3\text{V}, 0\text{V}$ ;  $V_S = 5\text{V}, 0\text{V}$ ;  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                            | CONDITIONS                                                                                   |   | LT1990C/LT1990I |     |     | UNITS                          |
|------------|--------------------------------------|----------------------------------------------------------------------------------------------|---|-----------------|-----|-----|--------------------------------|
|            |                                      |                                                                                              |   | MIN             | TYP | MAX |                                |
| $V_{OS}$   | Input Offset Voltage, RTI            | $V_S = 3\text{V}, 0\text{V}$<br>$G = 1, 10$                                                  | ● |                 |     | 4.1 | mV                             |
|            |                                      | $V_S = 5\text{V}, 0\text{V}$<br>$G = 1, 10$                                                  | ● |                 |     | 4.1 | mV                             |
| $V_{OS}/T$ | Input Offset Voltage Drift, RTI      | (Note 10)                                                                                    | ● |                 | 5   | 22  | $\mu\text{V}/^{\circ}\text{C}$ |
| $V_{OSH}$  | Input Offset Voltage Hysteresis, RTI | (Note 11)                                                                                    | ● |                 | 230 |     | $\mu\text{V}$                  |
| PSRR       | Power Supply Rejection Ratio, RTI    | $V_S = 2.7\text{V}$ to $12.7\text{V}$<br>$V_{CM} = V_{REF} = 1.25\text{V}$<br>$G = 1, 10$    | ● | 78              |     |     | dB                             |
|            | Minimum Supply Voltage               | Guaranteed by PSRR                                                                           | ● |                 |     | 2.7 | V                              |
| $I_S$      | Supply Current                       | (Note 8)                                                                                     | ● |                 |     | 150 | $\mu\text{A}$                  |
| $V_{OL}$   | Output Voltage Swing LOW             | $-IN = V^+$ , $+IN = \text{Half Supply}$ (Note 8)                                            | ● |                 |     | 60  | mV                             |
| $V_{OH}$   | Output Voltage Swing HIGH            | $-IN = 0\text{V}$ , $+IN = \text{Half Supply}$<br>$V_S = 3\text{V}, 0\text{V}$ , Below $V^+$ | ● |                 |     | 180 | mV                             |
|            |                                      | $V_S = 5\text{V}, 0\text{V}$ , Below $V^+$                                                   | ● |                 |     | 205 | mV                             |
| $I_{SC}$   | Output Short-Circuit Current         | Short to GND (Note 9)                                                                        | ● | 3               |     |     | mA                             |
|            |                                      | Short to $V^+$ (Note 9)                                                                      | ● | 11              |     |     | mA                             |

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ .  $V_S = 3\text{V}, 0\text{V}$ ;  $V_S = 5\text{V}, 0\text{V}$ ;  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                        | CONDITIONS                                                                                                          |   | LT1990C/LT1990I |     |      | UNITS                   |
|------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------|---|-----------------|-----|------|-------------------------|
|            |                                  |                                                                                                                     |   | MIN             | TYP | MAX  |                         |
| $\Delta G$ | Gain Error                       | $V_{OUT} = 0.5\text{V}$ to $(+V_S) - 0.75\text{V}$<br>LT1990, $G = 1$                                               | ● |                 |     | 0.67 | %                       |
|            |                                  | LT1990A, $G = 1$                                                                                                    | ● |                 |     | 0.35 | %                       |
|            |                                  | $G = 10$                                                                                                            | ● |                 |     | 0.95 | %                       |
|            |                                  |                                                                                                                     |   |                 |     |      |                         |
| $G/T$      | Gain vs Temperature              | $G = 1$ (Note 10)                                                                                                   | ● |                 | 2   | 10   | ppm/ $^{\circ}\text{C}$ |
|            |                                  | $G = 10$ (Note 10)                                                                                                  | ● |                 | 7   | 20   | ppm/ $^{\circ}\text{C}$ |
| $V_{CM}$   | Input Voltage Range              | Guaranteed by CMRR                                                                                                  |   |                 |     |      |                         |
|            |                                  | $V_S = 3\text{V}, 0\text{V}$ , $V_{REF} = 1.25\text{V}$                                                             | ● | -5              |     | 25   | V                       |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$ , $V_{REF} = 1.25\text{V}$                                                             | ● | -5              |     | 80   | V                       |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$ , $V_{REF} = 2.5\text{V}$                                                              | ● | -37             |     | 48   | V                       |
| CMRR       | Common Mode Rejection Ratio, RTI | $V_S = 3\text{V}, 0\text{V}$ (Note 7)<br>$V_{CM} = -5\text{V}$ to $25\text{V}$ , $V_{REF} = 1.25\text{V}$<br>LT1990 | ● |                 | 57  |      | dB                      |
|            |                                  | LT1990A                                                                                                             | ● |                 | 67  |      | dB                      |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$<br>$V_{CM} = -5\text{V}$ to $80\text{V}$ , $V_{REF} = 1.25\text{V}$<br>LT1990          | ● |                 | 57  |      | dB                      |
|            |                                  | LT1990A                                                                                                             | ● |                 | 67  |      | dB                      |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$ (Note 7)<br>$V_{CM} = -38\text{V}$ to $47\text{V}$ , $V_{REF} = 2.5\text{V}$<br>LT1990 | ● |                 | 57  |      | dB                      |
|            |                                  | LT1990A                                                                                                             | ● |                 | 67  |      | dB                      |
|            |                                  |                                                                                                                     |   |                 |     |      |                         |
|            |                                  |                                                                                                                     |   |                 |     |      |                         |

## 3V/5V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ .  $V_S = 3\text{V}, 0\text{V}$ ;  $V_S = 5\text{V}, 0\text{V}$ ;  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                            | CONDITIONS                                                                                   |   | LT1990C/LT1990I |     |     | UNITS                          |
|------------|--------------------------------------|----------------------------------------------------------------------------------------------|---|-----------------|-----|-----|--------------------------------|
|            |                                      |                                                                                              |   | MIN             | TYP | MAX |                                |
| $V_{OS}$   | Input Offset Voltage, RTI            | $V_S = 3\text{V}, 0\text{V}$<br>$G = 1, 10$                                                  | ● |                 |     | 4.5 | mV                             |
|            |                                      | $V_S = 5\text{V}, 0\text{V}$<br>$G = 1, 10$                                                  | ● |                 |     | 4.5 | mV                             |
| $V_{OS}/T$ | Input Offset Voltage Drift, RTI      | (Note 10)                                                                                    | ● |                 | 5   | 22  | $\mu\text{V}/^{\circ}\text{C}$ |
| $V_{OSH}$  | Input Offset Voltage Hysteresis, RTI | (Note 11)                                                                                    | ● |                 | 230 |     | $\mu\text{V}$                  |
| PSRR       | Power Supply Rejection Ratio, RTI    | $V_S = 2.7\text{V}$ to $12.7\text{V}$<br>$V_{CM} = V_{REF} = 1.25\text{V}$                   | ● | 76              |     |     | dB                             |
|            | Minimum Supply Voltage               | Guaranteed by PSRR                                                                           | ● |                 |     | 2.7 | V                              |
| $I_S$      | Supply Current                       | (Note 8)                                                                                     | ● |                 |     | 170 | $\mu\text{A}$                  |
| $V_{OL}$   | Output Voltage Swing LOW             | $-IN = V^+$ , $+IN = \text{Half Supply}$ (Note 8)                                            | ● |                 |     | 70  | mV                             |
| $V_{OH}$   | Output Voltage Swing HIGH            | $-IN = 0\text{V}$ , $+IN = \text{Half Supply}$<br>$V_S = 3\text{V}, 0\text{V}$ , Below $V^+$ | ● |                 |     | 200 | mV                             |
|            |                                      | $V_S = 5\text{V}, 0\text{V}$ , Below $V^+$                                                   | ● |                 |     | 275 | mV                             |
| $I_{SC}$   | Output Short-Circuit Current         | Short to GND (Note 9)                                                                        | ● | 2               |     |     | mA                             |
|            |                                      | Short to $V^+$ (Note 9)                                                                      | ● | 8               |     |     | mA                             |

## 3V/5V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ .  $V_S = 3\text{V}, 0\text{V}$ ;  $V_S = 5\text{V}, 0\text{V}$ ;  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                        | CONDITIONS                                                                                                          |   | LT1990H |     |      | UNITS                   |
|------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------|---|---------|-----|------|-------------------------|
|            |                                  |                                                                                                                     |   | MIN     | TYP | MAX  |                         |
| $\Delta G$ | Gain Error                       | $V_{OUT} = 0.5\text{V}$ to $(+V_S) - 0.75\text{V}$<br>LT1990, $G = 1$                                               | ● |         |     | 0.69 | %                       |
|            |                                  | LT1990A, $G = 1$                                                                                                    | ● |         |     | 0.37 | %                       |
|            |                                  | $G = 10$                                                                                                            | ● |         |     | 0.97 | %                       |
|            |                                  |                                                                                                                     |   |         |     |      |                         |
| G/T        | Gain vs Temperature              | $G = 1$ (Note 10)                                                                                                   | ● |         | 2   | 10   | ppm/ $^{\circ}\text{C}$ |
|            |                                  | $G = 10$ (Note 10)                                                                                                  | ● |         | 7   | 20   | ppm/ $^{\circ}\text{C}$ |
| $V_{CM}$   | Input Voltage Range              | Guaranteed by CMRR                                                                                                  |   |         |     |      |                         |
|            |                                  | $V_S = 3\text{V}, 0\text{V}$ , $V_{REF} = 1.25\text{V}$                                                             | ● | -5      |     | 25   | V                       |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$ , $V_{REF} = 1.25\text{V}$                                                             | ● | -5      |     | 80   | V                       |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$ , $V_{REF} = 2.5\text{V}$                                                              | ● | -37     |     | 48   | V                       |
| CMRR       | Common Mode Rejection Ratio, RTI | $V_S = 3\text{V}, 0\text{V}$ (Note 7)<br>$V_{CM} = -5\text{V}$ to $25\text{V}$ , $V_{REF} = 1.25\text{V}$<br>LT1990 | ● | 56      |     |      | dB                      |
|            |                                  | LT1990A                                                                                                             | ● | 66      |     |      | dB                      |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$<br>$V_{CM} = -5\text{V}$ to $80\text{V}$ , $V_{REF} = 1.25\text{V}$<br>LT1990          | ● | 56      |     |      | dB                      |
|            |                                  | LT1990A                                                                                                             | ● | 66      |     |      | dB                      |
|            |                                  | $V_S = 5\text{V}, 0\text{V}$ (Note 7)<br>$V_{CM} = -38\text{V}$ to $47\text{V}$ , $V_{REF} = 2.5\text{V}$<br>LT1990 | ● | 56      |     |      | dB                      |
|            |                                  | LT1990A                                                                                                             | ● | 66      |     |      | dB                      |
|            |                                  |                                                                                                                     |   |         |     |      |                         |
|            |                                  |                                                                                                                     |   |         |     |      |                         |

## 3V/5V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ .  $V_S = 3\text{V}, 0\text{V}$ ;  $V_S = 5\text{V}, 0\text{V}$ ;  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = \text{half supply}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                            | CONDITIONS                                                                                   |   | LT1990H |     |     | UNITS                          |
|------------|--------------------------------------|----------------------------------------------------------------------------------------------|---|---------|-----|-----|--------------------------------|
|            |                                      |                                                                                              |   | MIN     | TYP | MAX |                                |
| $V_{OS}$   | Input Offset Voltage, RTI            | $V_S = 3\text{V}, 0\text{V}$<br>$G = 1, 10$                                                  | ● |         |     | 5.2 | mV                             |
|            |                                      | $V_S = 5\text{V}, 0\text{V}$<br>$G = 1, 10$                                                  | ● |         |     | 5.2 | mV                             |
| $V_{OS/T}$ | Input Offset Voltage Drift, RTI      | (Note 10)                                                                                    | ● |         | 5   | 22  | $\mu\text{V}/^{\circ}\text{C}$ |
| $V_{OSH}$  | Input Offset Voltage Hysteresis, RTI | (Note 11)                                                                                    | ● |         | 250 |     | $\mu\text{V}$                  |
| PSRR       | Power Supply Rejection Ratio, RTI    | $V_S = 2.7\text{V}$ to $12.7\text{V}$<br>$V_{CM} = V_{REF} = 1.25\text{V}$                   | ● | 75      |     |     | dB                             |
|            | Minimum Supply Voltage               | Guaranteed by PSRR                                                                           | ● |         |     | 2.7 | V                              |
| $I_S$      | Supply Current                       | (Note 8)                                                                                     | ● |         |     | 200 | $\mu\text{A}$                  |
| $V_{OL}$   | Output Voltage Swing LOW             | $-IN = V^+$ , $+IN = \text{Half Supply}$ (Note 8)                                            | ● |         |     | 80  | mV                             |
| $V_{OH}$   | Output Voltage Swing HIGH            | $-IN = 0\text{V}$ , $+IN = \text{Half Supply}$<br>$V_S = 3\text{V}, 0\text{V}$ , Below $V^+$ | ● |         |     | 230 | mV                             |
|            |                                      | $V_S = 5\text{V}, 0\text{V}$ , Below $V^+$                                                   | ● |         |     | 275 | mV                             |
| $I_{SC}$   | Output Short-Circuit Current         | Short to GND (Note 9)                                                                        | ● | 1       |     |     | mA                             |
|            |                                      | Short to $V^+$ (Note 9)                                                                      | ● | 5       |     |     | mA                             |

## $\pm 15\text{V}$ ELECTRICAL CHARACTERISTICS

$V_S = \pm 15\text{V}$ ,  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = 0\text{V}$ ,  $G = 1, 10$ ,  $T_A = 25^{\circ}\text{C}$ , unless otherwise noted. (Note 6)

| SYMBOL     | PARAMETER                         | CONDITIONS                                         | MIN        | TYP         | MAX        | UNITS                          |
|------------|-----------------------------------|----------------------------------------------------|------------|-------------|------------|--------------------------------|
| G          | Gain                              | Pins 5 and 8 = Open<br>Pins 5 and 8 = $V_{REF}$    |            | 1<br>10     |            |                                |
| $\Delta G$ | Gain Error                        | $V_{OUT} = \pm 10\text{V}$<br>LT1990, $G = 1$      |            | 0.4         | 0.6        | %                              |
|            |                                   | LT1990A, $G = 1$                                   |            | 0.07        | 0.28       | %                              |
|            |                                   | $G = 10$                                           |            | 0.2         | 0.8        | %                              |
| GNL        | Gain Nonlinearity                 | $V_{OUT} = \pm 10\text{V}$<br>$G = 1$              |            | 0.0008      | 0.002      | %                              |
|            |                                   | $G = 10$                                           |            | 0.005       | 0.02       | %                              |
| $V_{CM}$   | Input Voltage Range               | Guaranteed by CMRR                                 | -250       |             | 250        | V                              |
| CMRR       | Common Mode Rejection Ratio, RTI  | $V_{CM} = -250\text{V}$ to $250\text{V}$<br>LT1990 | 60         | 68          |            | dB                             |
|            |                                   | LT1990A                                            | 70         | 75          |            | dB                             |
| $V_{OS}$   | Offset Voltage, RTI               | $G = 1, 10$                                        |            | 0.9         | 5.2        | mV                             |
| $e_n$      | Input Noise Voltage, RTI          | $f_0 = 0.1\text{Hz}$ to $10\text{Hz}$              |            | 22          |            | $\mu\text{V}_{P-P}$            |
|            | Noise Voltage Density, RTI        | $f_0 = 1\text{kHz}$                                |            | 1           |            | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| $R_{IN}$   | Input Resistance                  | Differential                                       |            | 2           |            | $\text{M}\Omega$               |
|            |                                   | Common Mode                                        |            | 0.5         |            | $\text{M}\Omega$               |
| PSRR       | Power Supply Rejection Ratio, RTI | $V_S = \pm 1.35\text{V}$ to $\pm 18\text{V}$       | 82         | 100         |            | dB                             |
|            | Minimum Supply Voltage            | Guaranteed by PSRR                                 |            | $\pm 1.2$   | $\pm 1.35$ | V                              |
| $I_S$      | Supply Current                    |                                                    |            | 140         | 180        | $\mu\text{A}$                  |
| $V_{OUT}$  | Output Voltage Swing              |                                                    | $\pm 14.5$ | $\pm 14.79$ |            | V                              |

# ±15V ELECTRICAL CHARACTERISTICS

$V_S = \pm 15V$ ,  $R_L = 10k$ ,  $V_{CM} = V_{REF} = 0V$ ,  $G = 1, 10$ ,  $T_A = 25^\circ C$ , unless otherwise noted. (Note 6)

| SYMBOL     | PARAMETER                    | CONDITIONS                       | MIN     | TYP                             | MAX | UNITS      |
|------------|------------------------------|----------------------------------|---------|---------------------------------|-----|------------|
| $I_{SC}$   | Output Short-Circuit Current | Short to $V^-$<br>Short to $V^+$ | 6<br>15 | 9<br>22                         |     | mA<br>mA   |
| BW         | Bandwidth                    | $G = 1$<br>$G = 10$              |         | 105<br>7                        |     | kHz<br>kHz |
| SR         | Slew Rate                    | $G = 1$ , $V_{OUT} = \pm 10V$    | 0.3     | 0.55                            |     | V/ $\mu s$ |
|            | Settling Time to 0.01%       | 10V Step, $G = 1$                |         | 60                              |     | $\mu s$    |
| $AV_{REF}$ | Reference Gain to Output     | $G = 1$<br>$G = 10$              |         | $1 \pm 0.0007$<br>$1 \pm 0.007$ |     |            |

The ● denotes the specifications which apply over the temperature range of  $0^\circ C \leq T_A \leq 70^\circ C$ .  $V_S = \pm 15V$ ,  $R_L = 10k$ ,  $V_{CM} = V_{REF} = 0V$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                            | CONDITIONS                                                             |             | LT1990C/LT1990I |        |                     | UNITS                              |
|------------|--------------------------------------|------------------------------------------------------------------------|-------------|-----------------|--------|---------------------|------------------------------------|
|            |                                      |                                                                        |             | MIN             | TYP    | MAX                 |                                    |
| $\Delta G$ | Gain Error                           | $V_{OUT} = \pm 10V$<br>LT1990, $G = 1$<br>LT1990A, $G = 1$<br>$G = 10$ | ●<br>●<br>● |                 |        | 0.65<br>0.33<br>0.9 | %<br>%<br>%                        |
| GNL        | Gain Nonlinearity                    | $V_{OUT} = \pm 10V$<br>$G = 1$<br>$G = 10$                             | ●<br>●      |                 |        | 0.0025<br>0.025     | %<br>%                             |
| G/T        | Gain vs Temperature                  | $G = 1$ (Note 10)<br>$G = 10$ (Note 10)                                | ●<br>●      |                 | 2<br>7 | 10<br>20            | ppm/ $^\circ C$<br>ppm/ $^\circ C$ |
| $V_{CM}$   | Input Voltage Range                  | Guaranteed by CMRR                                                     | ●           | -250            |        | 250                 | V                                  |
| CMRR       | Common Mode Rejection Ratio, RTI     | $V_{CM} = -250V$ to $250V$<br>LT1990<br>LT1990A                        | ●<br>●      | 59<br>68        |        |                     | dB<br>dB                           |
| $V_{OS}$   | Input Offset Voltage, RTI            | $G = 1, 10$                                                            | ●           |                 |        | 6.2                 | mV                                 |
| $V_{OS}/T$ | Input Offset Voltage Drift, RTI      | (Note 10)                                                              | ●           |                 | 5      | 22                  | $\mu V/^\circ C$                   |
| $V_{OSH}$  | Input Offset Voltage Hysteresis, RTI | (Note 11)                                                              | ●           |                 | 250    |                     | $\mu V$                            |
| PSRR       | Power Supply Rejection Ratio, RTI    | $V_S = \pm 1.35V$ to $\pm 18V$                                         | ●           | 80              |        |                     | dB                                 |
|            | Minimum Supply Voltage               | Guaranteed by PSRR                                                     | ●           |                 |        | $\pm 1.35$          | V                                  |
| $I_S$      | Supply Current                       |                                                                        | ●           |                 |        | 230                 | $\mu A$                            |
| $V_{OUT}$  | Output Voltage Swing                 |                                                                        | ●           | $\pm 14.4$      |        |                     | V                                  |
| $I_{SC}$   | Output Short-Circuit Current         | Short to $V^-$<br>Short to $V^+$                                       | ●<br>●      | 5<br>13         |        |                     | mA<br>mA                           |
| SR         | Slew Rate                            | $G = 1$ , $V_{OUT} = \pm 10V$                                          | ●           | 0.25            |        |                     | V/ $\mu s$                         |

## ±15V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = 0\text{V}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                            | CONDITIONS                                   |   | LT1990C/LT1990I |     |            | UNITS                          |
|------------|--------------------------------------|----------------------------------------------|---|-----------------|-----|------------|--------------------------------|
|            |                                      |                                              |   | MIN             | TYP | MAX        |                                |
| $\Delta G$ | Gain Error                           | $V_{OUT} = \pm 10\text{V}$                   | ● |                 |     | 0.67       | %                              |
|            |                                      | LT1990, $G = 1$                              | ● |                 |     | 0.35       | %                              |
|            |                                      | LT1990A, $G = 1$                             | ● |                 |     | 0.95       | %                              |
| GNL        | Gain Nonlinearity                    | $V_{OUT} = \pm 10\text{V}$                   | ● |                 |     | 0.003      | %                              |
|            |                                      | $G = 1$                                      | ● |                 |     | 0.03       | %                              |
|            |                                      | $G = 10$                                     | ● |                 |     |            |                                |
| G/T        | Gain vs Temperature                  | $G = 1$ (Note 10)                            | ● |                 | 2   | 10         | ppm/ $^{\circ}\text{C}$        |
|            |                                      | $G = 10$ (Note 10)                           | ● |                 | 7   | 20         | ppm/ $^{\circ}\text{C}$        |
| $V_{CM}$   | Input Voltage Range                  | Guaranteed by CMRR                           | ● | -250            |     | 250        | V                              |
| CMRR       | Common Mode Rejection Ratio, RTI     | $V_{CM} = -250\text{V}$ to $250\text{V}$     | ● |                 |     |            |                                |
|            |                                      | LT1990                                       | ● | 58              |     |            | dB                             |
|            |                                      | LT1990A                                      | ● | 67              |     |            | dB                             |
| $V_{OS}$   | Input Offset Voltage, RTI            | $G = 1, 10$                                  | ● |                 |     | 6.7        | mV                             |
| $V_{OS}/T$ | Input Offset Voltage Drift, RTI      | (Note 10)                                    | ● |                 | 5   | 22         | $\mu\text{V}/^{\circ}\text{C}$ |
| $V_{OSH}$  | Input Offset Voltage Hysteresis, RTI | (Note 11)                                    | ● |                 | 250 |            | $\mu\text{V}$                  |
| PSRR       | Power Supply Rejection Ratio, RTI    | $V_S = \pm 1.35\text{V}$ to $\pm 18\text{V}$ | ● | 78              |     |            | dB                             |
|            | Minimum Supply Voltage               | Guaranteed by PSRR                           | ● |                 |     | $\pm 1.35$ | V                              |
| $I_S$      | Supply Current                       |                                              | ● |                 |     | 280        | $\mu\text{A}$                  |
| $V_{OUT}$  | Output Voltage Swing                 |                                              | ● | $\pm 14.3$      |     |            | V                              |
| $I_{SC}$   | Output Short-Circuit Current         | Short to $V^-$                               | ● | 3               |     |            | mA                             |
|            |                                      | Short to $V^+$                               | ● | 10              |     |            | mA                             |
| SR         | Slew Rate                            | $G = 1$ , $V_{OUT} = \pm 10\text{V}$         | ● | 0.2             |     |            | V/ $\mu\text{s}$               |

## ±15V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = 0\text{V}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL     | PARAMETER                        | CONDITIONS                               |   | LT1990H |     |        | UNITS                          |
|------------|----------------------------------|------------------------------------------|---|---------|-----|--------|--------------------------------|
|            |                                  |                                          |   | MIN     | TYP | MAX    |                                |
| $\Delta G$ | Gain Error                       | $V_{OUT} = \pm 10\text{V}$               | ● |         |     | 0.69   | %                              |
|            |                                  | LT1990, $G = 1$                          | ● |         |     | 0.37   | %                              |
|            |                                  | LT1990A, $G = 1$                         | ● |         |     | 0.97   | %                              |
| GNL        | Gain Nonlinearity                | $V_{OUT} = \pm 10\text{V}$               | ● |         |     | 0.0035 | %                              |
|            |                                  | $G = 1$                                  | ● |         |     | 0.035  | %                              |
|            |                                  | $G = 10$                                 | ● |         |     |        |                                |
| G/T        | Gain vs Temperature              | $G = 1$ (Note 10)                        | ● |         | 2   | 10     | ppm/ $^{\circ}\text{C}$        |
|            |                                  | $G = 10$ (Note 10)                       | ● |         | 7   | 20     | ppm/ $^{\circ}\text{C}$        |
| $V_{CM}$   | Input Voltage Range              | Guaranteed by CMRR                       | ● | -250    |     | 250    | V                              |
| CMRR       | Common Mode Rejection Ratio, RTI | $V_{CM} = -250\text{V}$ to $250\text{V}$ | ● |         |     |        |                                |
|            |                                  | LT1990                                   | ● | 57      |     |        | dB                             |
|            |                                  | LT1990A                                  | ● | 66      |     |        | dB                             |
| $V_{OS}$   | Input Offset Voltage, RTI        | $G = 1, 10$                              | ● |         |     | 7.4    | mV                             |
| $V_{OS}/T$ | Input Offset Voltage Drift, RTI  | (Note 10)                                | ● |         | 5   | 22     | $\mu\text{V}/^{\circ}\text{C}$ |

## ±15V ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $R_L = 10\text{k}$ ,  $V_{CM} = V_{REF} = 0\text{V}$ ,  $G = 1, 10$ , unless otherwise noted. (Notes 4, 6)

| SYMBOL    | PARAMETER                            | CONDITIONS                                   |        | LT1990H    |     |            | UNITS            |
|-----------|--------------------------------------|----------------------------------------------|--------|------------|-----|------------|------------------|
|           |                                      |                                              |        | MIN        | TYP | MAX        |                  |
| $V_{OSH}$ | Input Offset Voltage Hysteresis, RTI | (Note 11)                                    | ●      |            | 250 |            | $\mu\text{V}$    |
| PSRR      | Power Supply Rejection Ratio, RTI    | $V_S = \pm 1.35\text{V}$ to $\pm 18\text{V}$ | ●      | 77         |     |            | dB               |
|           | Minimum Supply Voltage               | Guaranteed by PSRR                           | ●      |            |     | $\pm 1.35$ | V                |
| $I_S$     | Supply Current                       |                                              | ●      |            |     | 330        | $\mu\text{A}$    |
| $V_{OUT}$ | Output Voltage Swing                 |                                              | ●      | $\pm 14.2$ |     |            | V                |
| $I_{SC}$  | Output Short-Circuit Current         | Short to $V^-$<br>Short to $V^+$             | ●<br>● | 1.5<br>7   |     |            | mA<br>mA         |
| SR        | Slew Rate                            | $G = 1$ , $V_{OUT} = \pm 10\text{V}$         | ●      | 0.1        |     |            | V/ $\mu\text{s}$ |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** ESD (Electrostatic Discharge) sensitive device. Extensive use of ESD protection devices are used internal to the LT1990, however, high electrostatic discharge can damage or degrade the device. Use proper ESD handling precautions.

**Note 3:** A heat sink may be required to keep the junction temperature below absolute maximum.

**Note 4:** The LT1990C/LT1990I are guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The LT1990H is guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

**Note 5:** The LT1990C is guaranteed to meet the specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  and is designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  but is not tested or QA

sampled at these temperatures. The LT1990I is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The LT1990H is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

**Note 6:**  $G = 10$  limits are guaranteed by correlation to  $G = 1$  tests and gain error tests at  $G = 10$ .

**Note 7:** Limits are guaranteed by correlation to  $-5\text{V}$  to  $80\text{V}$  CMRR tests.

**Note 8:**  $V_S = 3\text{V}$  limits are guaranteed by correlation to  $V_S = 5\text{V}$  and  $V_S = \pm 15\text{V}$  tests.


**Note 9:**  $V_S = 5\text{V}$  limits are guaranteed by correlation to  $V_S = 3\text{V}$  and  $V_S = \pm 15\text{V}$  tests.

**Note 10:** This parameter is not 100% tested.


**Note 11:** Hysteresis in offset voltage is created by package stress that differs depending on whether the IC was previously at a higher or lower temperature. Offset voltage hysteresis is always measured at  $25^{\circ}\text{C}$ , but the IC is cycled to  $85^{\circ}\text{C}$  I-grade ( $70^{\circ}\text{C}$  C-grade or  $125^{\circ}\text{C}$  H-grade) or  $-40^{\circ}\text{C}$  I/H-grade ( $0^{\circ}\text{C}$  C-grade) before successive measurement.

# TYPICAL PERFORMANCE CHARACTERISTICS


**Supply Current vs Supply Voltage**

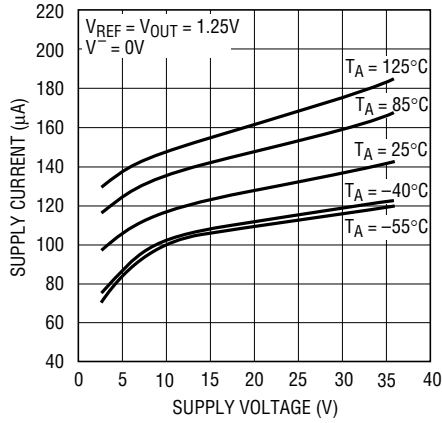


**Supply Current vs Temperature**

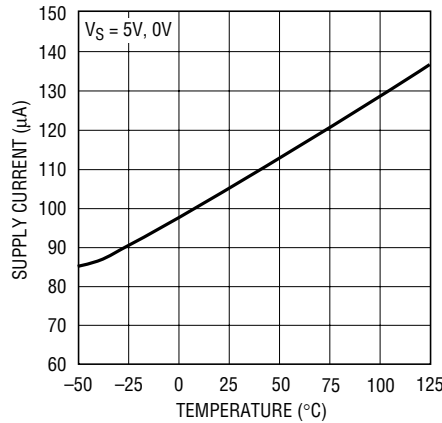


**Output Voltage Swing vs Load Current**

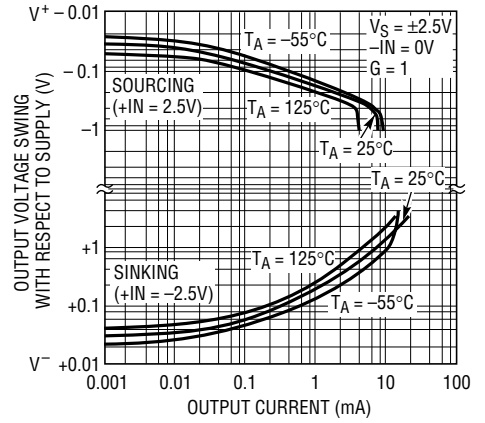


**Output Voltage vs Input Voltage, G = 1**

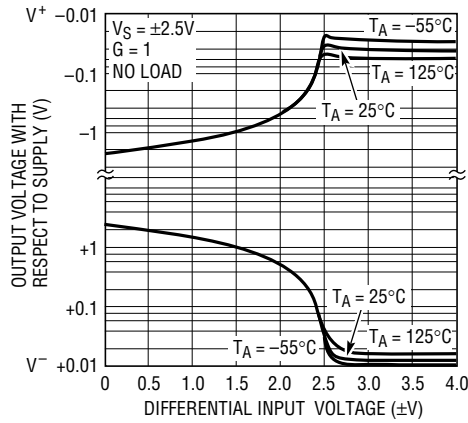


**Output Voltage vs Input Voltage, G = 10**

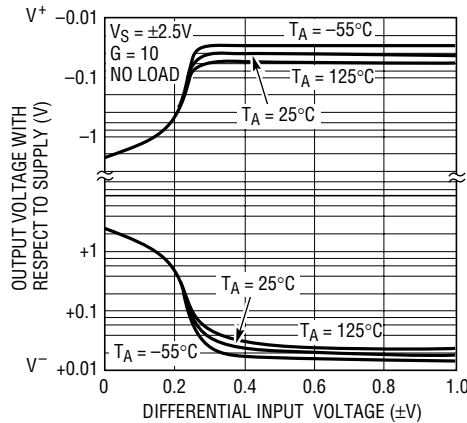


**Output Voltage Swing vs Supply Voltage**

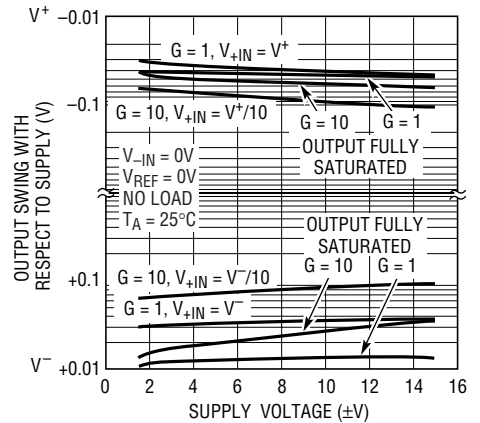


**Output Short-Circuit Current vs Supply Voltage**

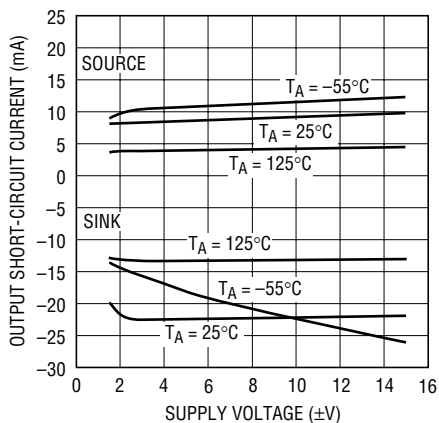

**Input Voltage Range vs Single Supply Voltage**

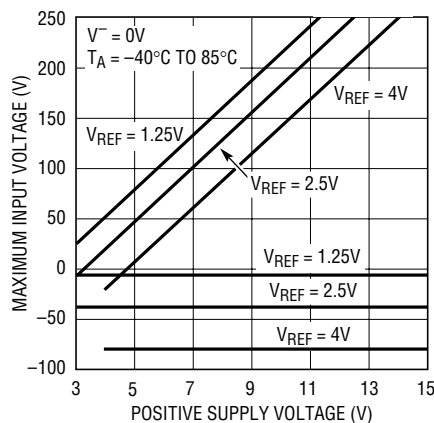


**Input Voltage Range vs Split Supply Voltage**

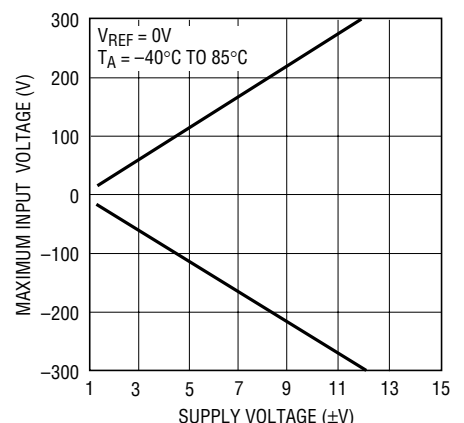


# TYPICAL PERFORMANCE CHARACTERISTICS

**Common Mode Rejection Ratio vs Frequency**

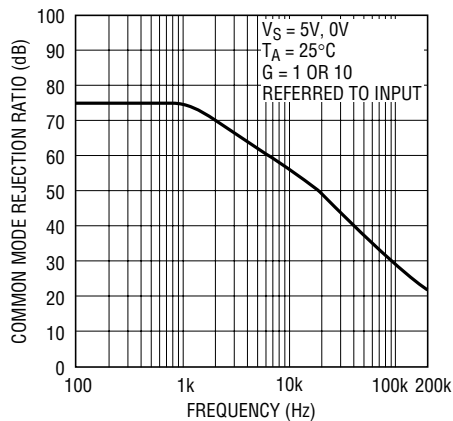


1990 G10

**Gain vs Frequency**

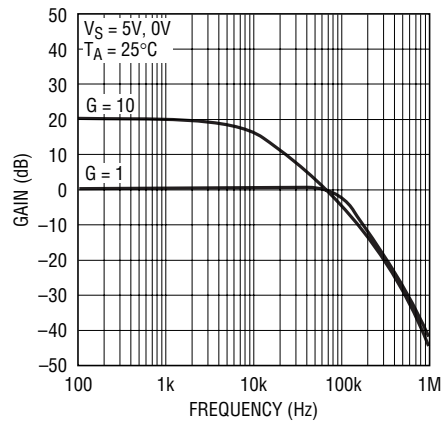


1990 G12

**-3dB Bandwidth vs Supply Voltage,  $G = 1$**

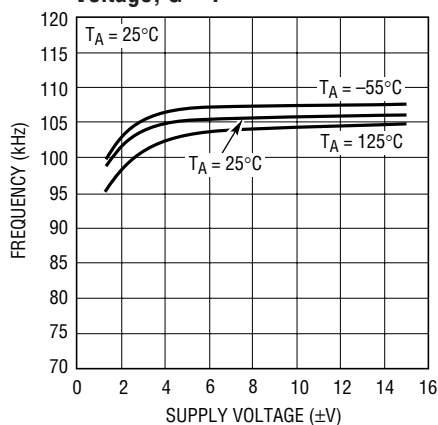


1990 G13

**-3dB Bandwidth vs Supply Voltage,  $G = 10$**

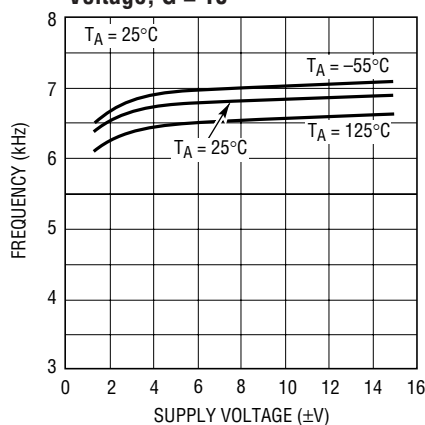


1990 G14

**Slew Rate vs Supply Voltage,  $G = 1$**

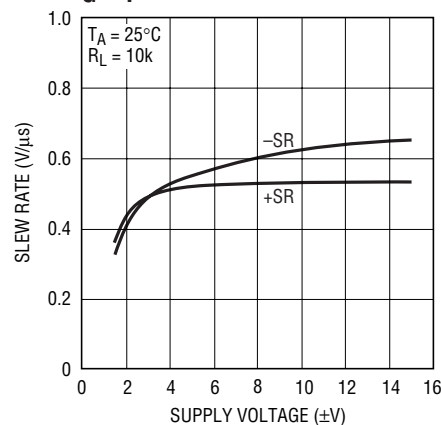


1990 G15

**Slew Rate vs Supply Voltage,  $G = 10$**

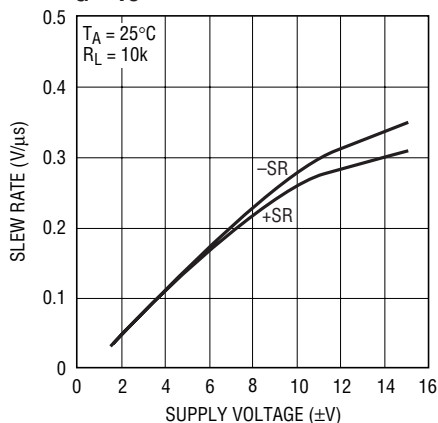


1990 G16

**Slew Rate vs Temperature,  $G = 1$**

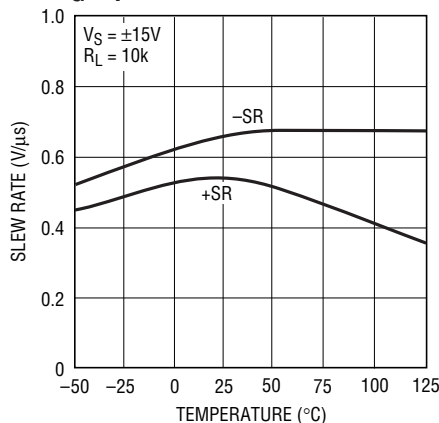

1990 G17


**Slew Rate vs Temperature,  $G = 10$**

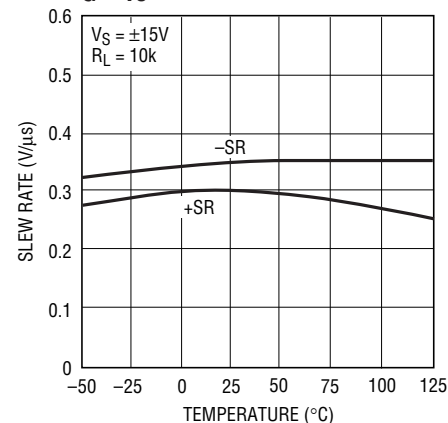


1990 G18

# TYPICAL PERFORMANCE CHARACTERISTICS


Output Impedance vs Frequency

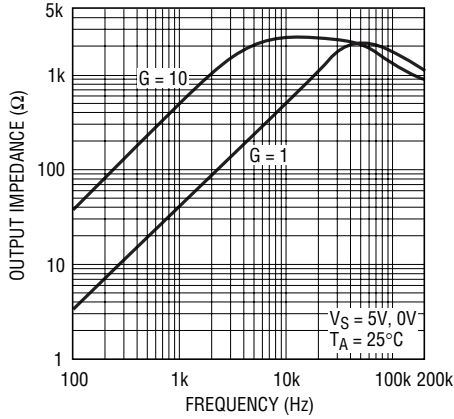


Power Supply Rejection Ratio vs Frequency

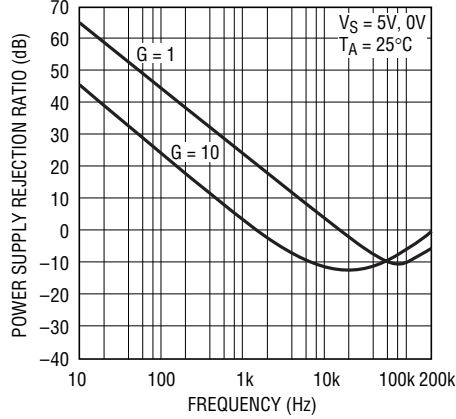


Warm-Up Drift vs Time

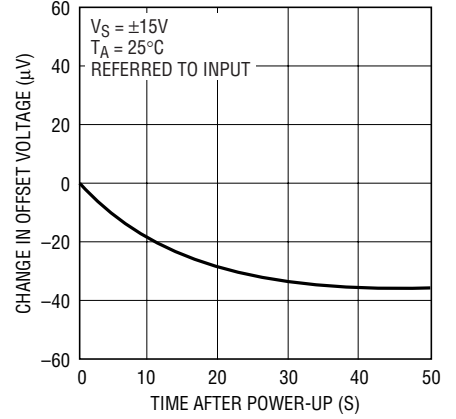


Settling Time vs Output Step, G = 1

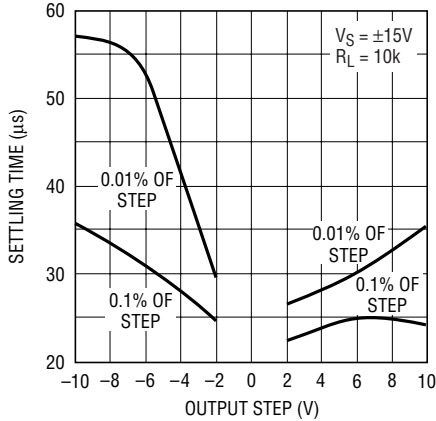


Settling Time vs Output Step, G = 10

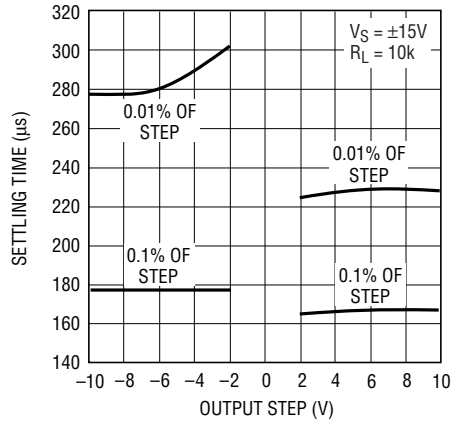


Voltage Noise Density vs Frequency

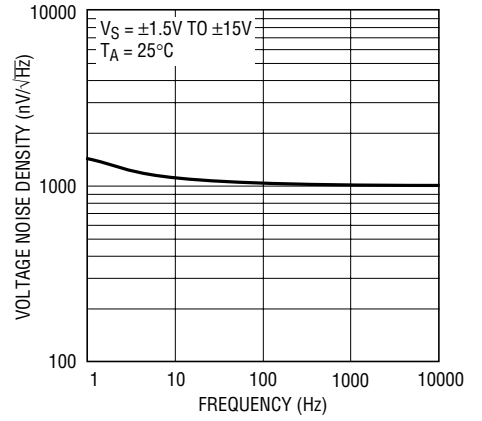


0.1 to 10Hz Noise Voltage

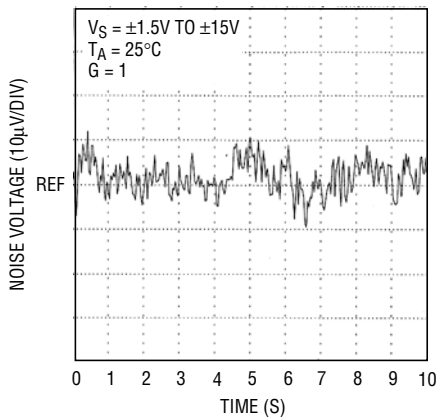

0.01 to 1Hz Noise Voltage

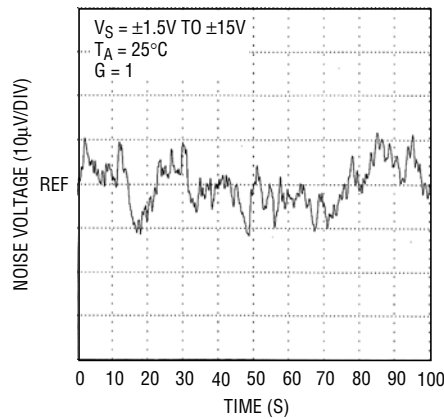


Overshoot vs Capacitive Load

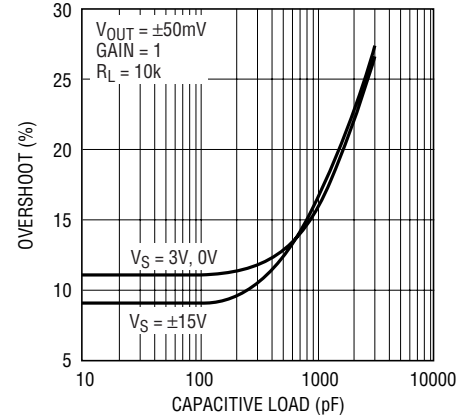


# TYPICAL PERFORMANCE CHARACTERISTICS


Small Signal Transient Response

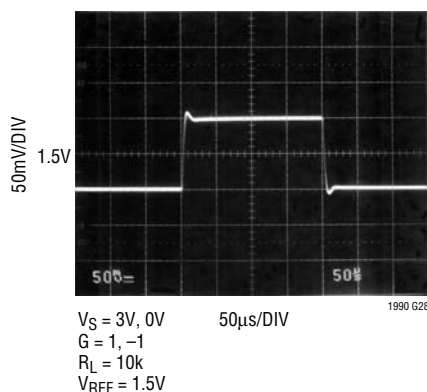


Small Signal Transient Response

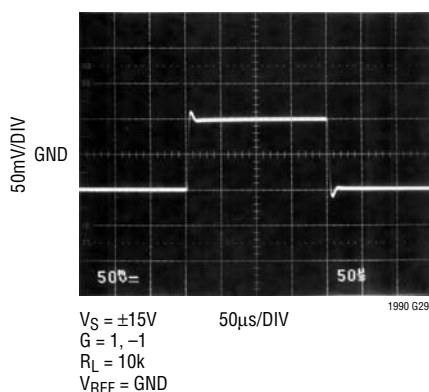

Large Signal Transient Response

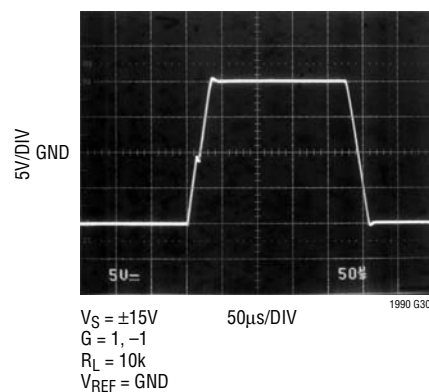

# BLOCK DIAGRAM

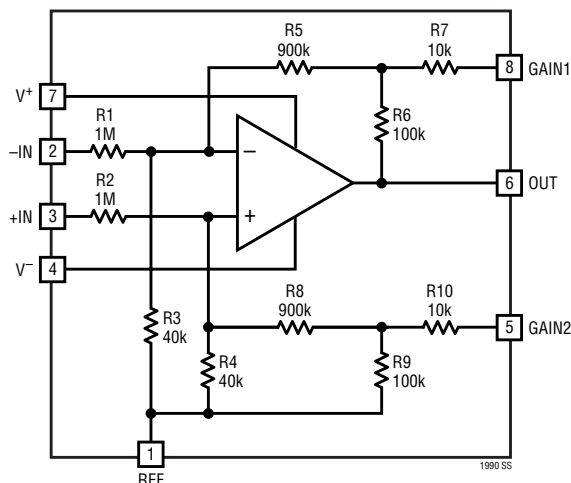

# PIN FUNCTIONS

**REF (Pin 1):** Reference Input. Sets the output level when the difference between the inputs is zero.

**-IN (Pin 2):** Inverting Input. Connects a 1MΩ resistor to the op amp's inverting input. Designed to permit high voltage operation.

**+IN (Pin 3):** Noninverting Input. Connects a 1MΩ resistor to the op amp's noninverting input. Designed to permit high voltage operation.

**V- (Pin 4):** Negative Power Supply. Can be either ground (in single supply applications) or a negative voltage (in split supply applications).

**GAIN2 (Pin 5):** Gain = 10 Select Input. Configures the

amplifier for a gain of 10 when connected to the GAIN1 pin and the REF pin. The gain is equal to one when both GAIN2 and GAIN1 are open. See Applications section for additional functions.

**OUT (Pin 6):** Output.  $V_{OUT} = G \cdot (V_{+IN} - V_{-IN}) + V_{REF}$ , in the basic configuration.

**V+ (Pin 7):** Positive Power Supply. Can range from 2.7V to 36V above the V- voltage.

**GAIN1 (Pin 8):** Gain = 10 Select Input. Configures the amplifier for a gain of 10 when connected to the GAIN2 pin and the REF pin. The gain is equal to one when both GAIN1 and GAIN2 are open. See Applications section for additional functions.

## APPLICATIONS INFORMATION

### Primary Features

The LT1990 is a complete gain-block solution for high input common mode voltage applications, incorporating a low power precision operational amplifier providing rail-to-rail output swing along with on-chip precision thin-film resistors for high accuracy. The Block Diagram shows the internal architecture of the part. The on-chip resistors form a modified difference amplifier including a reference port for introducing offset or other additive waveforms. With pin-strapping alone either unity gain or gain of 10 is produced with high precision. The resistor network is designed to produce internal common-mode voltage division of 27 so that a very large input range is available compared to the power supply voltage(s) used by the LT1990 itself. The LT1990 is ideally suited to situations where relatively small signals need to be extracted from high voltage circuits, as is the case in many current monitoring instrumentation applications for example. With the ability to accept a range of input voltages well outside the limits of the local power rails and its greater than  $1\text{M}\Omega$  input impedances, development of precision low power over-the-top and under-the-bottom instrumentation designs is greatly simplified with the LT1990 single chip solution over conventional discrete implementations.

### Classic Difference Amplifier

Used in the basic difference amplifier topology where the gain  $G$  is pin-strap configurable to be unity or ten, the following relationship is realized:

$$V_O = G \cdot (V_{+IN} - V_{-IN}) + V_{REF}$$

To operate in unity gain, the GAIN1 and GAIN2 pins are left disconnected. For  $G = 10$  operation, the GAIN1 and GAIN2 pins are simply connected to the REF pin.

The input common mode range capability is up to  $\pm 250\text{V}$ , governed by the following relationships:

For  $G = 1$  and  $G = 10$  where GAIN1 and GAIN2 are only tied together (not grounded, etc):

$$V_{CM+} \leq 27 \cdot V^+ - 26 \cdot V_{REF} - 23$$

$$V_{CM-} \geq 27 \cdot V^- - 26 \cdot V_{REF} + 27$$

For  $G = 10$  where GAIN1 and GAIN2 are tied to a common potential  $V_{GAIN}$ :

$$V_{CM+} \leq 27 \cdot V^+ - 26 \cdot V_{REF} - 23 - V_{GAIN}$$

$$V_{CM-} \geq 27 \cdot V^- - 26 \cdot V_{REF} + 27 - V_{GAIN}$$

For split supplies over about  $\pm 11\text{V}$ , the full  $\pm 250\text{V}$  common mode range is normally available (with  $V_{REF}$  a small fraction of the supply). With lower supply voltages, an appropriate selection of  $V_{REF}$  can tailor the input common mode range to a specific requirement. As an example, the following low supply voltage scenarios are readily implemented with the LT1990:

| Supply | $V_{REF}$ | $V_{CM}$ Range                                                |
|--------|-----------|---------------------------------------------------------------|
| +3V    | 1.25V     | -5V to 25V (e.g. 12V automotive environment)                  |
| +5V    | 1.25V     | -5V to 80V (e.g. 42V automotive environment)                  |
| +5V    | 4.00V     | -77V to 8V (e.g. telecom environment; use downward signaling) |

### Configuring Other Gains

An intermediate gain  $G$  ranging between 1 and 10 may be produced by placing an adjustable resistance between the GAIN1 and GAIN2 pins according to the following nominal relationship:

$$R_{GAIN} \approx (180\text{k}/(G - 1)) - 20\text{k}$$

While the expression is exact, the value is approximate because the absolute resistance of the internal network could vary on a unit-to-unit basis by as much as  $\pm 30\%$  from the nominal figures and the external gain resistance is required to accommodate that deviation. Once adjusted, however, the gain stability is excellent by virtue of the  $-30\text{ppm}/^\circ\text{C}$  typical temperature coefficient offered by the on-chip thin-film resistor process.

### Preserving and Enhancing Common Mode Rejection

The basic difference amplifier topology of the LT1990 requires that source impedances seen by the input pins  $+IN$  and  $-IN$ , should be matched to within a few tens of ohms to avoid increasing common mode induced errors beyond the basic production limits of the part. Known source imbalances beyond that level should be compensated for by the addition of series resistance to the lower-impedance source. Also the source impedance of a signal connected to the REF pin must be on the order of a few ohms or less to preserve the high accuracy of the LT1990.

## APPLICATIONS INFORMATION

While the LT1990 comes from the factory with an excellent CMRR, some precision applications with a large applied common mode voltage may require a method to trim out residual common mode error. This is easily accomplished by adding series resistance to each input, +IN and -IN, such that an adjustable resistance difference of  $\pm 1\text{k}\Omega$  is provided. This is most easily realized by adding a fixed  $1\text{k}\Omega$  in series with one of the inputs, and a  $2\text{k}\Omega$  trimmer in series with the other as shown in Figure 1. The trim range of this configuration is  $\pm 0.1\%$  for the internal gain resistor matching, so a much more finely resolved correction is available using the LT1990 than is realizable with ordinary discrete solutions. In applications where the input common mode voltage is relatively constant and large (perhaps at or beyond the supply range), this same configuration can be treated as an offset adjustment.

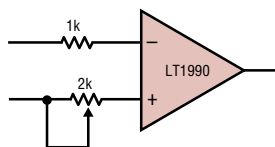


Figure 1. Optional CMRR Trim

### Dual Differential-Input Arithmetic Block

The internal resistor network topology of the LT1990 allows the GAIN1 and GAIN2 pins to be used as another differential input in addition to the normal +IN and -IN port. This can be a very useful function for implementing servo-loop differential error amplifiers, for example. In this mode of operation, the output is governed by the

following relationship:

$$V_O = 10 \cdot (V_{+IN} - V_{-IN} + V_{GAIN2} - V_{GAIN1}) + V_{REF}$$

Unlike the main inputs, the GAIN1 and GAIN2 pins are clamped by substrate diodes and ESD structures, thus the operating voltage range of these pins is limited to  $V^- - 0.2\text{V}$  to  $V^- + 36\text{V}$ . If the GAIN inputs are brought beyond the operating input range, care must be taken to limit the input currents to less than  $10\text{mA}$  to prevent damage to the device. For best results in this mode of operation the common mode voltage of the GAIN1 and GAIN2 pins should be equal to the REF pin voltage. Also, since the gain setting resistors associated with the GAIN1 and GAIN2 inputs are in the  $10\text{k}\Omega$  area, low source impedances are particularly important to preserve the precision of the LT1990.

This dual differential input mode of operation is used in the circuit as shown in Figure 2.

This circuit is a high efficiency H-bridge driver that is PWM modulated to provide a controlled current to an electro-magnet coil. Since the common mode voltage of the current sense resistor  $R_S$  varies with operating current and the coil properties, a differential feedback is required. In this application, it was desirable to allow the control input to utilize the wide common mode range port (+IN and -IN) so that constraints on input referencing are eliminated. The GAIN1 and GAIN2 pins always operate within the supply range and both ports operate with a gain of 10 to develop the loop error. The LTC1923 provides the loop integrator and PWM functions of the servo.





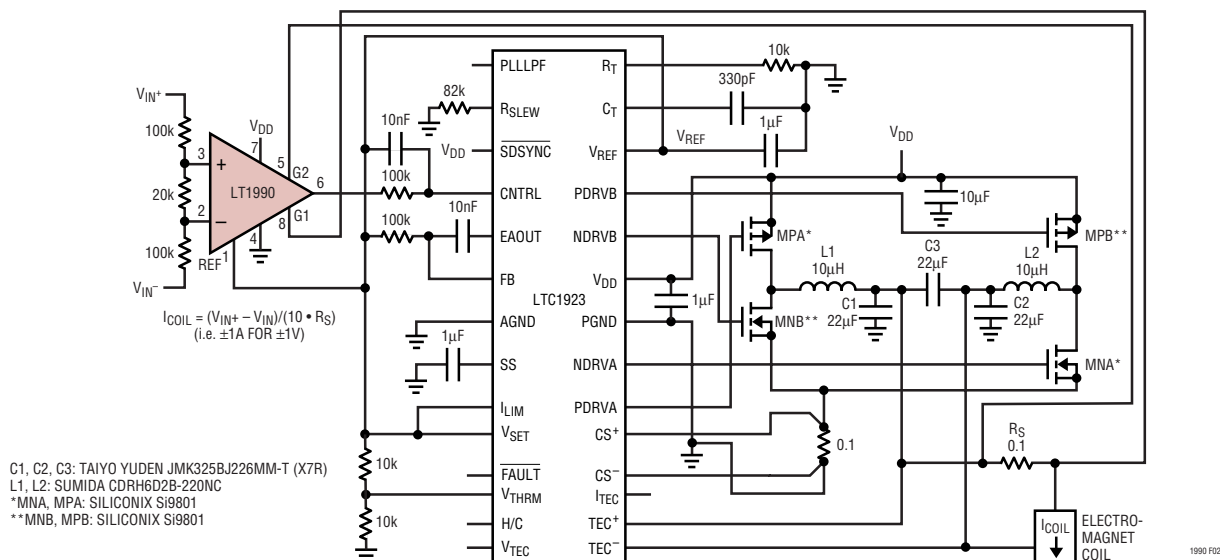


Figure 2. PWM-Based  $\pm 1\text{A}$  Electromagnet Current Controller

## TYPICAL APPLICATION

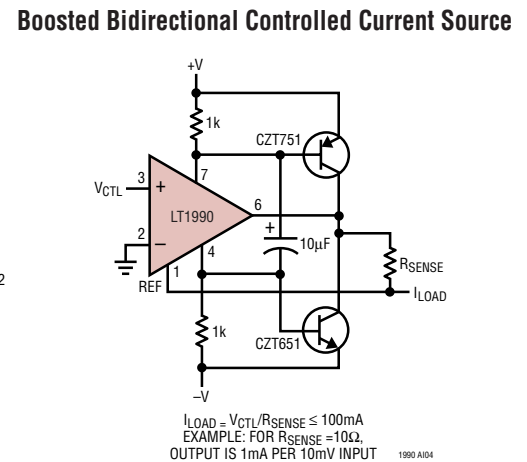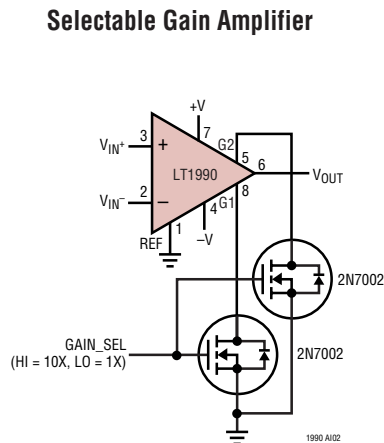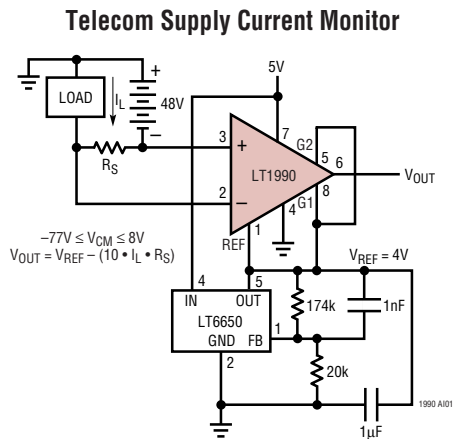


### Bidirectional Controlled Current Source



## PACKAGE DESCRIPTION

### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

RECOMMENDED SOLDER PAD LAYOUT

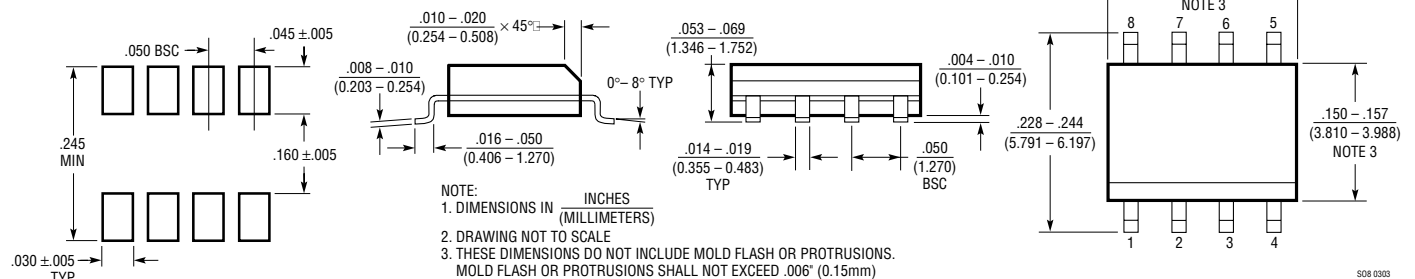

## RELATED PARTS

| PART NUMBER | DESCRIPTION                                 | COMMENTS                                            |
|-------------|---------------------------------------------|-----------------------------------------------------|
| LT1787      | Precision High Side Current Sense Amplifier | On-Chip Precision Resistor Array                    |
| LT1789      | Micropower Instrumentation Amplifier        | Micropower, Precision, G = 1 to 1000                |
| LTC1921     | Dual -48V Supply and Fuse Monitor           | Withstands ±200V Transients                         |
| LT1991      | High Accuracy Difference Amplifier          | Micropower, Precision, Pin Selectable G = -13 to 14 |
| LT1995      | 30MHz, 1000V/μs Gain Selectable Amplifier   | Pin Selectable G = -7 to 8                          |
| LT6910      | Single Supply Programmable Gain Amplifier   | Digitally Controlled, SOT-23, G = 0 to 100          |

1990fb

LT 0406 REV B • PRINTED IN USA