

DUAL SP4T ANALOG SWITCH

3.3-V/2.5-V DUAL 4:1 ANALOG MULTIPLEXER/DEMULTIPLEXER

FEATURES

- Isolation in the Powered-Down Mode, $V_+ = 0$
- Low ON-State Resistance
- Low Charge Injection
- Excellent ON-State Resistance Matching
- Low Total Harmonic Distortion (THD)
- 2.3-V to 3.6-V Single-Supply Operation
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Performance Tested Per JESD 22
 - 2000-V Human-Body Model (A114-B, Class II)
 - 1000-V Charged-Device Model (C101)

DESCRIPTION



The TS3A5017 is a dual single-pole quadruple-throw (4:1) analog switch that is designed to operate from 2.3 V to 3.6 V. This device can handle both digital and analog signals, and signals up to V_+ can be transmitted in either direction.

FUNCTION TABLE


$\overline{\text{EN}}$	IN2	IN1	D TO S, S TO D
L	L	L	$D = S_1$
L	L	H	$D = S_2$
L	H	L	$D = S_3$
L	H	H	$D = S_4$
H	X	X	OFF

APPLICATIONS

- Sample-and-Hold Circuits
- Battery-Powered Equipment
- Audio and Video Signal Routing
- Communication Circuits

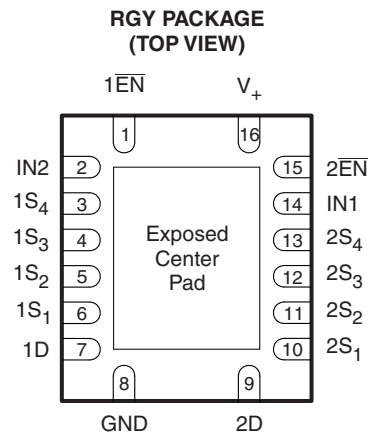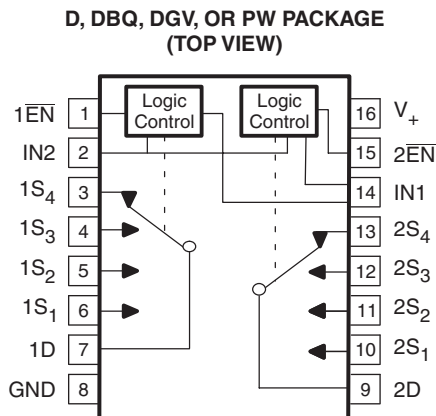

If exposed center pad is used, it must be connected as a secondary ground or left electrically open.

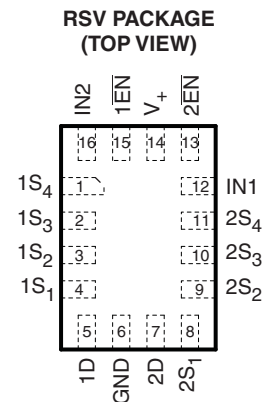

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

ORDERING INFORMATION

T_A	PACKAGE ⁽¹⁾⁽²⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	μQFN – RSV	Tape and reel	TS3A5017RSVR	ZVL
	QFN – RGY	Tape and reel	TS3A5017RGYR	YA017
	SOIC – D	Tube	TS3A5017D	TS3A5017
		Tape and reel	TS3A5017DR	
	SSOP (QSOP) – DBQ	Tape and reel	TS3A5017DBQR	YA017
	TSSOP – PW	Tube	TS3A5017PW	YA017
		Tape and reel	TS3A5017PWR	
	TVSOP – DGV	Tape and reel	TS3A5017DGVR	YA017

(1) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

(2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.

SUMMARY OF CHARACTERISTICS

$V_+ = 3.3\text{ V}$, $T_A = 25^\circ\text{C}$

Configuration	Dual Analog Multiplexer/Demultiplexer (4:1 Mux/Demux)
Number of channels	2
ON-state resistance (r_{on})	11 Ω
ON-state resistance match (Δr_{on})	1 Ω
ON-state resistance flatness ($r_{on(flat)}$)	7 Ω
Turn-on/turn-off time (t_{ON}/t_{OFF})	5 ns/1.5 ns
Charge injection (Q_C)	5 pC
Bandwidth (BW)	165 MHz
OFF isolation (O_{ISO})	–48 dB at 10 MHz
Crosstalk (X_{TALK})	–49 dB at 10 MHz
Total harmonic distortion (THD)	0.21%
Leakage current ($I_{D(OFF)}/I_{S(OFF)}$)	$\pm 0.1\text{ }\mu\text{A}$
Power-supply current (I_+)	2.5 μA
Package options	16-pin QFN, μQFN, SOIC, SSOP, TSSOP, or TVSOP

ABSOLUTE MINIMUM AND MAXIMUM RATINGS⁽¹⁾⁽²⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V ₊	Supply voltage ⁽³⁾		−0.5	4.6	V
V _S , V _D	Analog voltage ⁽³⁾⁽⁴⁾		−0.5	4.6	V
I _{SK} , I _{DK}	Analog port clamp current	V _S , V _D < 0	−50		mA
I _S , I _D	On-state switch current	V _S , V _D = 0 to 7 V	−128	128	mA
V _I	Digital input voltage		−0.5	4.6	V
I _{IK}	Digital input clamp current ⁽³⁾⁽⁴⁾	V _I < 0	−50		mA
I ₊	Continuous current through V ₊			100	mA
I _{GND}	Continuous current through GND		−100		mA
T _{stg}	Storage temperature		−65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
- (3) All voltages are with respect to ground, unless otherwise specified.
- (4) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

PACKAGE THERMAL IMPEDANCE

		UNIT
θ_{JA}	D package	73
	DB package	82
	DGV package	120
	DW package	108
	RGY package	91.6
	RSV package	184

- (1) The package thermal impedance is calculated in accordance with JESD 51-7.

ELECTRICAL CHARACTERISTICS FOR 3.3-V SUPPLY⁽¹⁾
 $V_+ = 2.7\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS		T _A	V ₊	MIN	TYP	MAX	UNIT
Analog Switch									
Analog signal range	V _D , V _S					0		V ₊	V
ON-state resistance	r _{on}	0 ≤ V _S ≤ V ₊ , I _D = −32 mA,	Switch ON, See Figure 13	25°C	3 V	11	12		Ω
				Full			14		
ON-state resistance match between channels	Δr _{on}	V _S = 2.1 V, I _D = −32 mA,	Switch ON, See Figure 13	25°C	3 V	1	2		Ω
				Full			3		
ON-state resistance flatness	r _{on(flat)}	0 ≤ V _S ≤ V ₊ , I _D = −32 mA,	Switch ON, See Figure 13	25°C	3 V	7	9		Ω
				Full			10		
S OFF leakage current	I _{S(OFF)}	V _S = 1 V, V _D = 3 V, or V _S = 3 V, V _D = 1 V,	Switch OFF, See Figure 14	25°C	3.6 V	−0.1	0.05	0.1	μA
				Full		−0.2		0.2	
	I _{SPWR(OFF)}	V _S = 0 to 3.6 V, V _D = 3.6 V to 0,		25°C	0 V	−1	0.5	1	
				Full		−5		5	
D OFF leakage current	I _{D(OFF)}	V _S = 1 V, V _D = 3 V, or V _S = 3 V, V _D = 1 V,	Switch OFF, See Figure 14	25°C	3.6 V	−0.1	0.05	0.1	μA
				Full		−0.2		0.2	
	I _{DPWR(OFF)}	V _D = 0 to 3.6 V, V _S = 3.6 V to 0,		25°C	0 V	−1	0.5	1	
				Full		−5		5	
S ON leakage current	I _{S(ON)}	V _S = 1 V, V _D = Open, or V _S = 3 V, V _D = Open,	Switch ON, See Figure 15	25°C	3.6 V	−0.1	0.05	0.1	μA
				Full		−0.2		0.2	
D ON leakage current	I _{D(ON)}	V _D = 1 V, V _S = Open, or V _D = 3 V, V _S = Open,	Switch ON, See Figure 15	25°C	3.6 V	−0.1	0.05	0.1	μA
				Full		−0.2		0.2	
Digital Control Inputs (IN1, IN2, $\overline{\text{EN}}$) ⁽²⁾									
Input logic high	V _{IH}			Full		2		V ₊	V
Input logic low	V _{IL}			Full		0		0.8	V
Input leakage current	I _{IH} , I _{IL}	V _I = V ₊ or 0		25°C	3.6 V	−1	0.05	1	μA
				Full		−1		1	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at V_+ or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

ELECTRICAL CHARACTERISTICS FOR 3.3-V SUPPLY (continued)
 $V_+ = 2.7\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS		T _A	V ₊	MIN	TYP	MAX	UNIT
Dynamic									
Turn-on time	t _{ON}	V _D = 2 V, R _L = 300 Ω,	C _L = 35 pF, See Figure 17	25°C	3.3 V	1	5	9.5	ns
				Full	3 V to 3.6 V	1		10.5	
Turn-off time	t _{OFF}	V _D = 2 V, R _L = 300 Ω,	C _L = 35 pF, See Figure 17	25°C	3.3 V	0.5	1.5	3.5	ns
				Full	3 V to 3.6 V	0.5		4.5	
Charge injection	Q _C	V _{GEN} = 0, R _{GEN} = 0, C _L = 0.1 nF,	See Figure 22	25°C	3.3 V		5		pC
S OFF capacitance	C _{S(OFF)}	V _S = V ₊ or GND, Switch OFF,	See Figure 16	25°C	3.3 V		4.5		pF
D OFF capacitance	C _{D(OFF)}	V _D = V ₊ or GND, Switch OFF,	See Figure 16	25°C	3.3 V		19		pF
S ON capacitance	C _{S(ON)}	V _S = V ₊ or GND, Switch ON,	See Figure 16	25°C	3.3 V		25		pF
D ON capacitance	C _{D(ON)}	V _D = V ₊ or GND, Switch ON,	See Figure 16	25°C	3.3 V		25		pF
Digital input capacitance	C _I	V _I = V ₊ or GND,	See Figure 16	25°C	3.3 V		2		pF
Bandwidth	BW	R _L = 50 Ω, Switch ON,	See Figure 18	25°C	3.3 V		165		MHz
OFF isolation	O _{ISO}	R _L = 50 Ω, f = 1 MHz,	See Figure 19	25°C	3.3 V		−48		dB
Crosstalk	X _{TALK}	R _L = 50 Ω, f = 1 MHz,	See Figure 20	25°C	3.3 V		−49		dB
Crosstalk adjacent	X _{TALK(ADJ)}	R _L = 50 Ω, f = 1 MHz,	See Figure 21	25°C	3.3 V		−74		dB
Total harmonic distortion	THD	R _L = 600 Ω, C _L = 50 pF,	f = 20 Hz to 20 kHz, See Figure 23	25°C	3.3 V		0.21		%
Supply									
Positive supply current	I ₊	V _I = V ₊ or GND,	Switch ON or OFF	25°C	3.6 V		2.5	7	μA
				Full				10	

ELECTRICAL CHARACTERISTICS FOR 2.5-V SUPPLY⁽¹⁾
 $V_+ = 2.3 \text{ V to } 2.7 \text{ V}$, $T_A = -40^\circ\text{C to } 85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Analog Switch								
Analog signal range	V_D, V_S				0		V_+	V
ON-state resistance	r_{on}	$0 \leq V_S \leq V_+$, $I_D = -24 \text{ mA}$, Switch ON, See Figure 13	25°C Full	2.3 V		20.5	22 24	Ω
ON-state resistance match between channels	Δr_{on}	$V_S = 1.6 \text{ V}$, $I_D = -24 \text{ mA}$, Switch ON, See Figure 13	25°C Full	2.3 V		1	2 3	Ω
ON-state resistance flatness	$r_{on(flat)}$	$0 \leq V_S \leq V_+$, $I_D = -24 \text{ mA}$, Switch ON, See Figure 13	25°C Full	2.3 V		16	18 20	Ω
S OFF leakage current	$I_{S(OFF)}$	$V_S = 0.5 \text{ V}$, $V_D = 2.2 \text{ V}$, or $V_S = 2.2 \text{ V}$, $V_D = 0.5 \text{ V}$, Switch OFF, See Figure 14	25°C Full	2.7 V	-0.1	0.05	0.1	μA
					-0.2		0.2	
	$I_{SPWR(OFF)}$	$V_S = 0 \text{ to } 2.7 \text{ V}$, $V_D = 2.7 \text{ V to } 0$,	25°C Full	0 V	-1	0.5	1	
					-5		5	
D OFF leakage current	$I_{D(OFF)}$	$V_S = 0.5 \text{ V}$, $V_D = 2.2 \text{ V}$, or $V_S = 2.2 \text{ V}$, $V_D = 0.5 \text{ V}$, Switch OFF, See Figure 14	25°C Full	2.7 V	-0.1	0.05	0.1	μA
					-0.2		0.2	
	$I_{DPWR(OFF)}$	$V_D = 0 \text{ to } 2.7 \text{ V}$, $V_S = 2.7 \text{ V to } 0$,	25°C Full	0 V	-1	0.5	1	
					-5		5	
S ON leakage current	$I_{S(ON)}$	$V_S = 0.5 \text{ V}$, $V_D = \text{Open}$, or $V_S = 2.2 \text{ V}$, $V_D = \text{Open}$, Switch ON, See Figure 15	25°C Full	2.7 V	-0.1	0.05	0.1	μA
D ON leakage current	$I_{D(ON)}$	$V_D = 0.5 \text{ V}$, $V_S = \text{Open}$, or $V_D = 2.2 \text{ V}$, $V_S = \text{Open}$, Switch ON, See Figure 15	25°C Full	2.7 V	-0.1	0.05	0.1	μA
Digital Control Inputs (IN1, IN2, $\overline{\text{EN}}$)⁽²⁾								
Input logic high	V_{IH}		Full		1.7		V_+	V
Input logic low	V_{IL}		Full		0		0.7	V
Input leakage current	I_{IH}, I_{IL}	$V_I = V_+ \text{ or } 0$	25°C	2.7 V	-1	0.05	1	μA
			Full		-1		1	







(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at V_+ or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

ELECTRICAL CHARACTERISTICS FOR 2.5-V SUPPLY (continued)
 $V_+ = 2.3 \text{ V to } 2.7 \text{ V}$, $T_A = -40^\circ\text{C to } 85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Dynamic								
Turn-on time	t_{ON}	$V_D = 2 \text{ V}$, $R_L = 300 \Omega$, $C_L = 35 \text{ pF}$, See Figure 17	25°C	2.5 V	1.5	5	8	ns
			Full	2.3 V to 2.7 V	1		10	
Turn-off time	t_{OFF}	$V_D = 2 \text{ V}$, $R_L = 300 \Omega$, $C_L = 35 \text{ pF}$, See Figure 17	25°C	2.5 V	0.3	2	4.5	ns
			Full	2.3 V to 2.7 V	0.3		6	
Charge injection	Q_C	$V_{GEN} = 0$, $R_{GEN} = 0$, $C_L = 0.1 \text{ nF}$, See Figure 22	25°C	2.5 V				pC
S OFF capacitance	$C_{S(OFF)}$	$V_S = V_+$ or GND, Switch OFF, See Figure 16	25°C	2.5 V		4.5		pF
D OFF capacitance	$C_{D(OFF)}$	$V_D = V_+$ or GND, Switch OFF, See Figure 16	25°C	2.5 V		18.5		pF
S ON capacitance	$C_{S(ON)}$	$V_S = V_+$ or GND, Switch ON, See Figure 16	25°C	2.5 V		24		pF
D ON capacitance	$C_{D(ON)}$	$V_D = V_+$ or GND, Switch ON, See Figure 16	25°C	2.5 V		24		pF
Digital input capacitance	C_I	$V_I = V_+$ or GND, See Figure 16	25°C	2.5 V		2		pF
Bandwidth	BW	$R_L = 50 \Omega$, Switch ON, See Figure 18	25°C	2.5 V		165		MHz
OFF isolation	O_{ISO}	$R_L = 50 \Omega$, $f = 1 \text{ MHz}$, See Figure 19	25°C	2.5 V		–48		dB
Crosstalk	X_{TALK}	$R_L = 50 \Omega$, $f = 1 \text{ MHz}$, See Figure 20	25°C	2.5 V		–49		dB
Crosstalk adjacent	$X_{TALK(ADJ)}$	$R_L = 50 \Omega$, $f = 1 \text{ MHz}$, See Figure 21	25°C	2.5 V		–74		dB
Total harmonic distortion	THD	$R_L = 600 \Omega$, $C_L = 50 \text{ pF}$, $f = 20 \text{ Hz to } 20 \text{ kHz}$, See Figure 23	25°C	2.5 V		0.29		%
Supply								
Positive supply current	I_+	$V_I = V_+$ or GND, Switch ON or OFF	25°C	2.7 V		2.5	7	μA
			Full				10	

TYPICAL PERFORMANCE

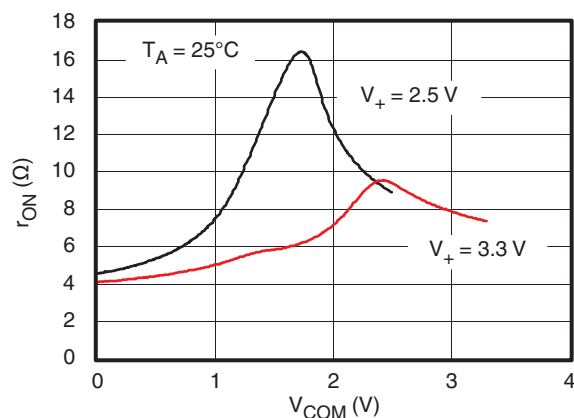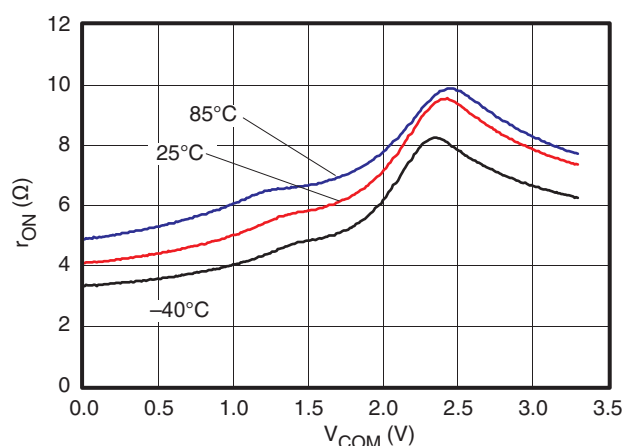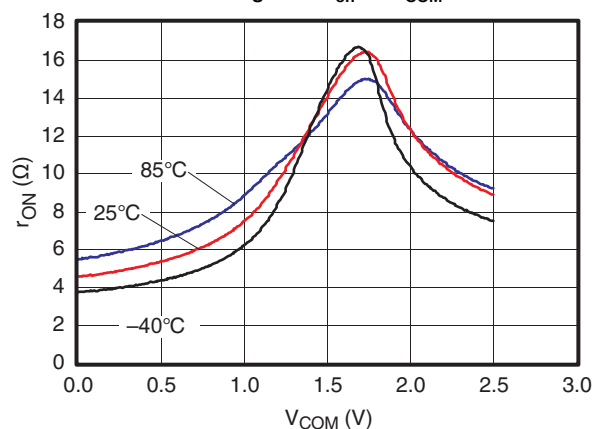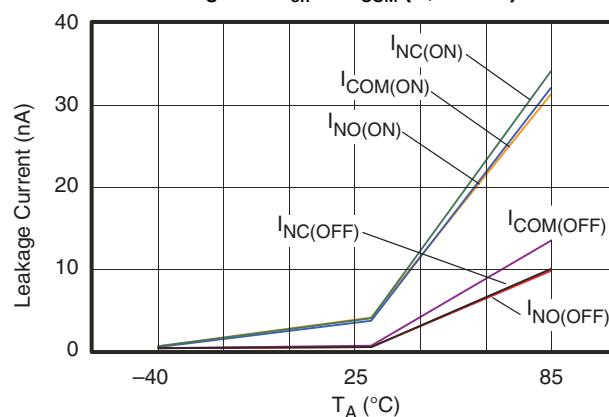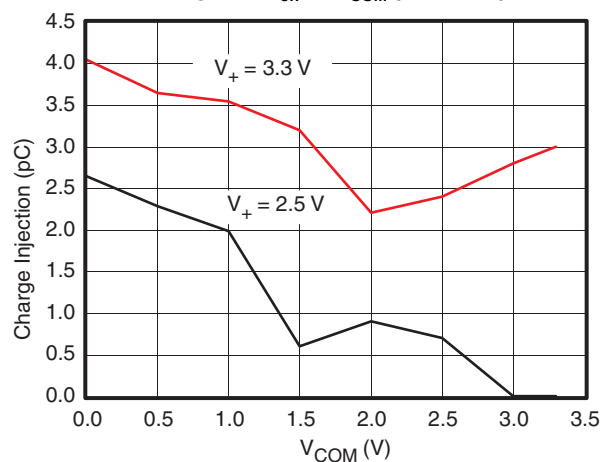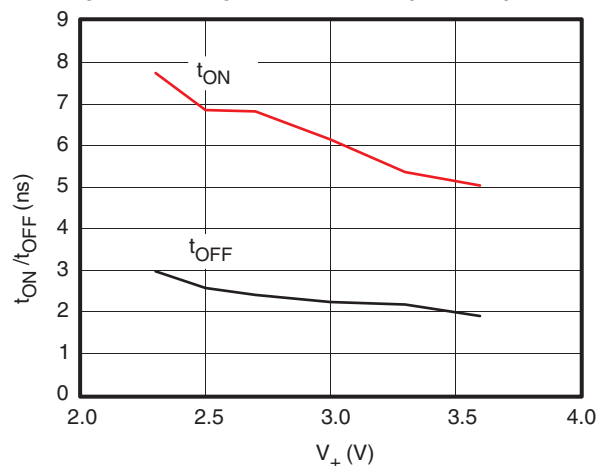Figure 1. r_{on} vs V_{COM} Figure 2. r_{on} vs V_{COM} ($V_+ = 3.3\text{ V}$)Figure 3. r_{on} vs V_{COM} ($V_+ = 2.5\text{ V}$)Figure 4. Leakage Current vs Temperature ($V_+ = 3.6\text{ V}$)Figure 5. Charge Injection (Q_C) vs V_{COM} Figure 6. t_{ON} and t_{OFF} vs Supply Voltage

TYPICAL PERFORMANCE (continued)

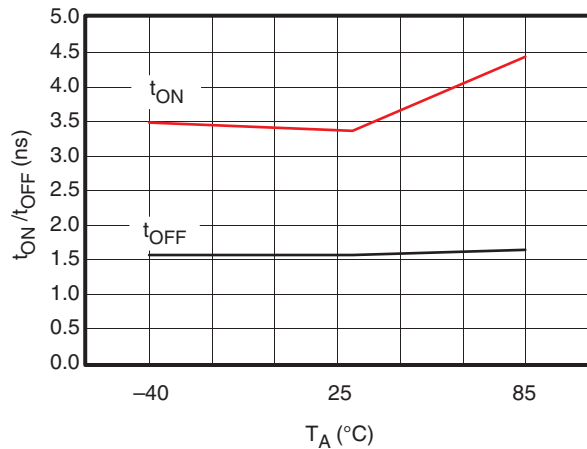


Figure 7. t_{ON} and t_{OFF} vs Temperature ($V_+ = 3.3$ V)

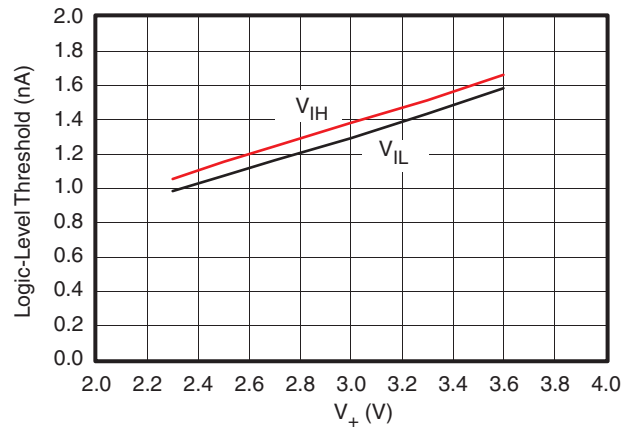


Figure 8. Logic-Level Threshold vs V_+

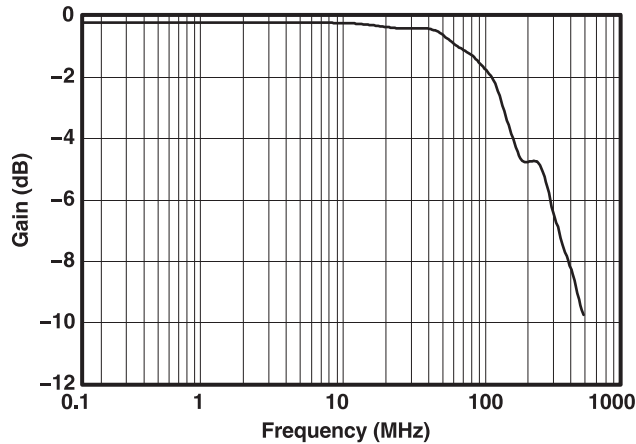


Figure 9. Bandwidth (Gain vs Frequency) ($V_+ = 3.3$ V)

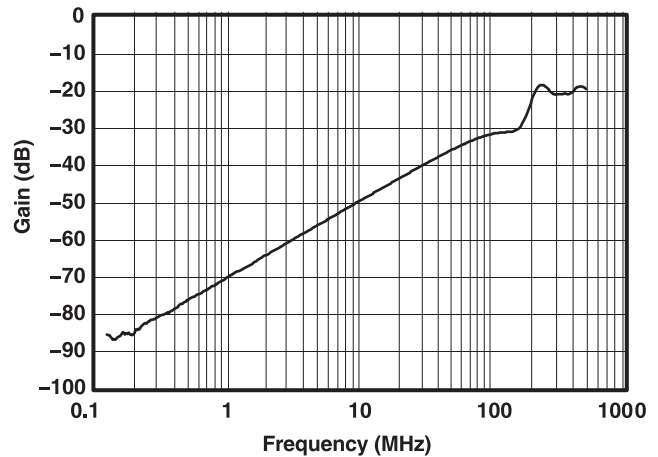


Figure 10. OFF Isolation and Crosstalk vs Frequency ($V_+ = 3.3$ V)

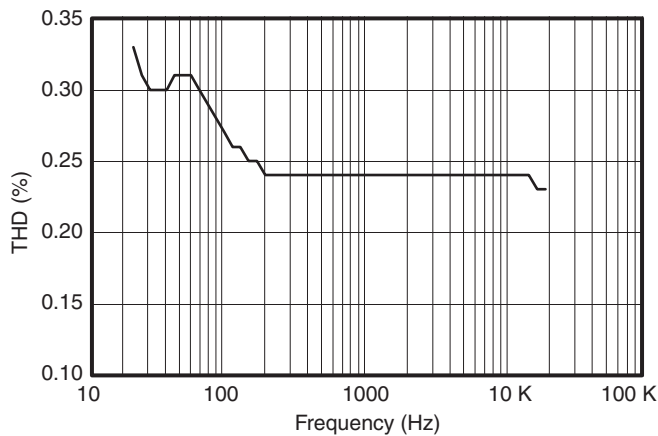


Figure 11. Total Harmonic Distortion vs Frequency

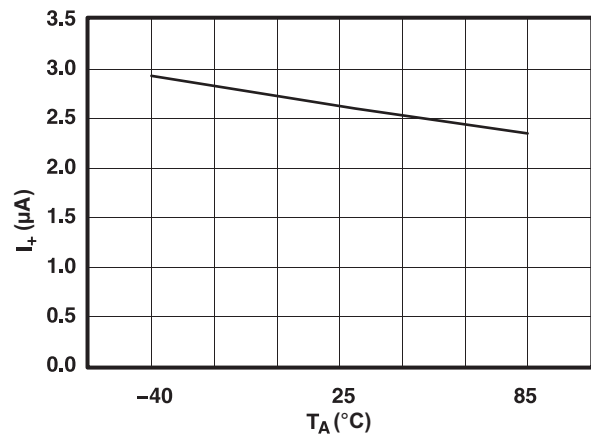


Figure 12. Power-Supply Current vs Temperature ($V_+ = 3.6$ V)




PIN DESCRIPTION

PIN NO.	NAME	DESCRIPTION
1	$\overline{1EN}$	Enable (active low)
2	IN2	Digital control to connect D to S
3	1S ₄	Analog I/O
4	1S ₃	Analog I/O
5	1S ₂	Analog I/O
6	1S ₁	Analog I/O
7	1D	Common
8	GND	Ground
9	2D	Common
10	2S ₁	Analog I/O
11	2S ₂	Analog I/O
12	2S ₃	Analog I/O
13	2S ₄	Analog I/O
14	IN1	Digital control to connect D to S
15	2EN	Enable (active low)
16	V ₊	Power supply

PARAMETER DESCRIPTION

SYMBOL	DESCRIPTION
V_D	Voltage at D
V_{NC}	Voltage at S
r_{on}	Resistance between D and S ports when the channel is ON
Δr_{on}	Difference of r_{on} between channels in a specific device
$r_{on(Flat)}$	Difference between the maximum and minimum value of r_{on} in a channel over the specified range of conditions
$I_{S(OFF)}$	Leakage current measured at the S port, with the corresponding channel (S to D) in the OFF state
$I_{SPWR(OFF)}$	Leakage current measured at the S port under the powered down mode, $V_+ = 0$
$I_{S(ON)}$	Leakage current measured at the S port, with the corresponding channel (S to D) in the ON state and the output (D) open
$I_{D(OFF)}$	Leakage current measured at the D port, with the corresponding channel (D to S) in the OFF state
$I_{DPWR(OFF)}$	Leakage current measured at the D port under the powered down mode, $V_+ = 0$
$I_{D(ON)}$	Leakage current measured at the D port, with the corresponding channel (D to S) in the ON state and the output (S) open
V_{IH}	Minimum input voltage for logic high for the control input (IN, $\overline{EN}$)
V_{IL}	Maximum input voltage for logic low for the control input (IN, $\overline{EN}$)
V_I	Voltage at the control input (IN, $\overline{EN}$)
I_{IH}, I_{IL}	Leakage current measured at the control input (IN, $\overline{EN}$)
t_{ON}	Turn-on time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog output (D or S) signal when the switch is turning ON.
t_{OFF}	Turn-off time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog output (D or S) signal when the switch is turning OFF.
Q_C	Charge injection is a measurement of unwanted signal coupling from the control (IN) input to the analog (S or D) output. This is measured in coulomb (C) and measured by the total charge induced due to switching of the control input. Charge injection, $Q_C = C_L \times \Delta V_D$, C_L is the load capacitance and ΔV_D is the change in analog output voltage.
$C_{S(OFF)}$	Capacitance at the S port when the corresponding channel (S to D) is OFF
$C_{S(ON)}$	Capacitance at the S port when the corresponding channel (S to D) is ON
$C_{D(OFF)}$	Capacitance at the D port when the corresponding channel (D to S) is OFF
$C_{D(ON)}$	Capacitance at the D port when the corresponding channel (D to S) is ON
C_I	Capacitance of control input (IN)
O_{ISO}	OFF isolation of the switch is a measurement of OFF-state switch impedance. This is measured in dB in a specific frequency, with the corresponding channel (S to D) in the OFF state.
X_{TALK}	Crosstalk is a measurement of unwanted signal coupling from an ON channel to an OFF channel ($1S_1$ to $2S_1$). This is measured in a specific frequency and in dB.
BW	Bandwidth of the switch. This is the frequency in which the gain of an ON channel is –3 dB below the DC gain.
THD	Total harmonic distortion describes the signal distortion caused by the analog switch. This is defined as the ratio of root mean square (RMS) value of the second, third, and higher harmonic to the absolute magnitude of the fundamental harmonic.
I_+	Static power-supply current with the control (IN) pin at V_+ or GND

PARAMETER MEASUREMENT INFORMATION

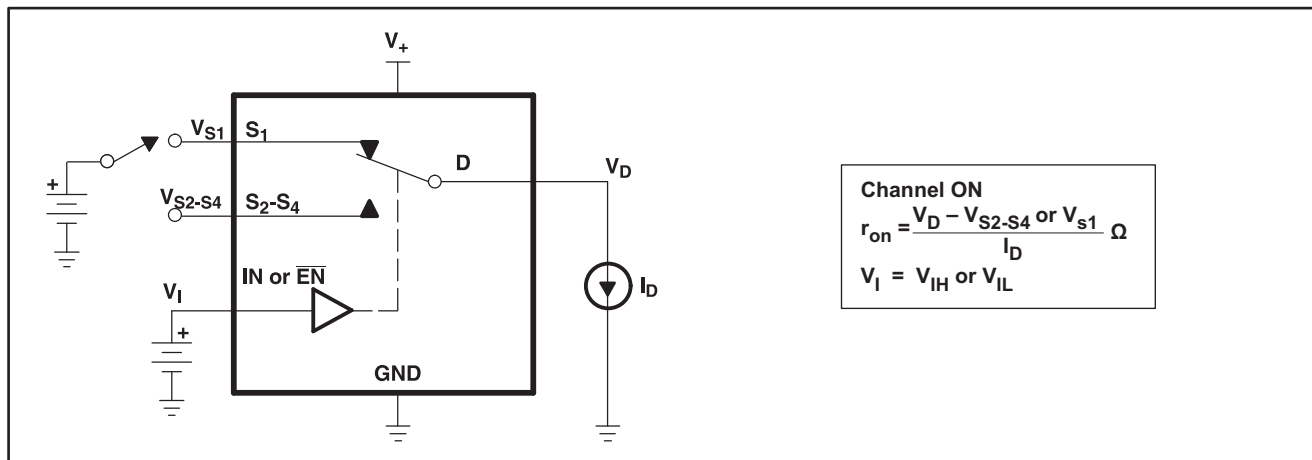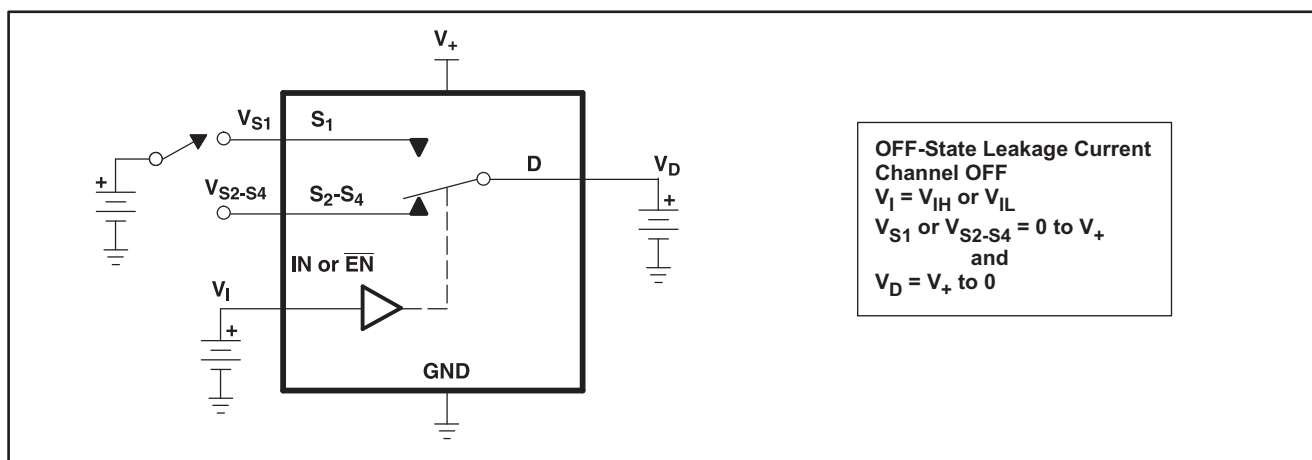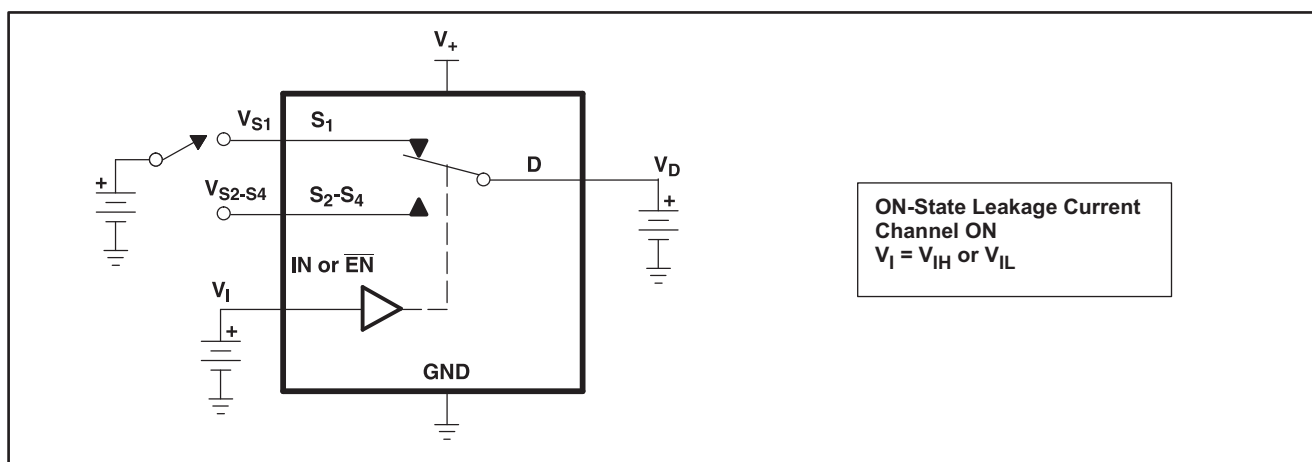Figure 13. ON-State Resistance (r_{on})Figure 14. OFF-State Leakage Current ($I_{D(OFF)}$, $I_{S(OFF)}$)Figure 15. ON-State Leakage Current ($I_{D(ON)}$, $I_{S(ON)}$)

PARAMETER MEASUREMENT INFORMATION (continued)


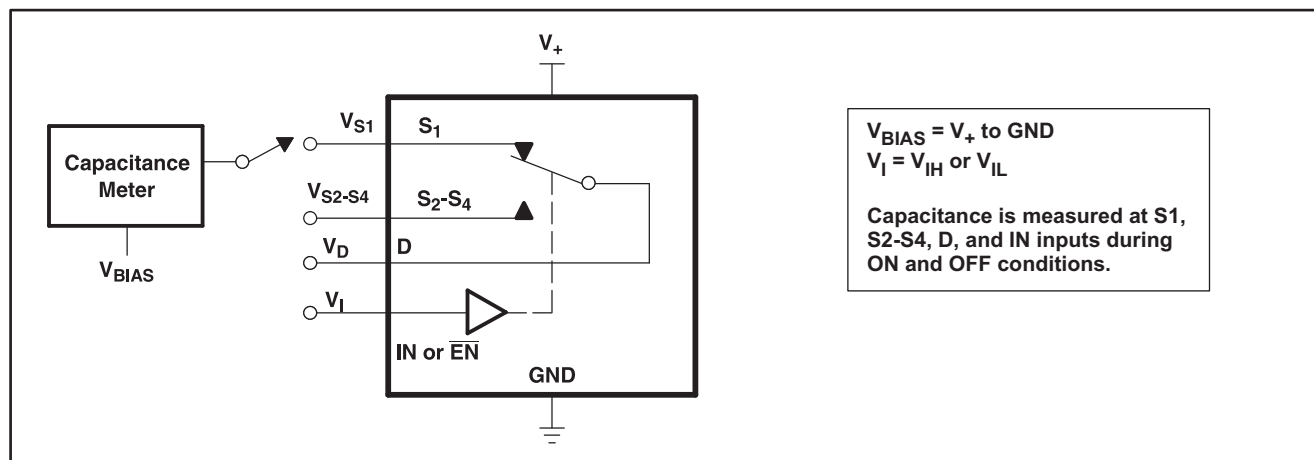


Figure 16. Capacitance (C_I , $C_{D(OFF)}$, $C_{D(ON)}$, $C_{S(OFF)}$, $C_{S(ON)}$)

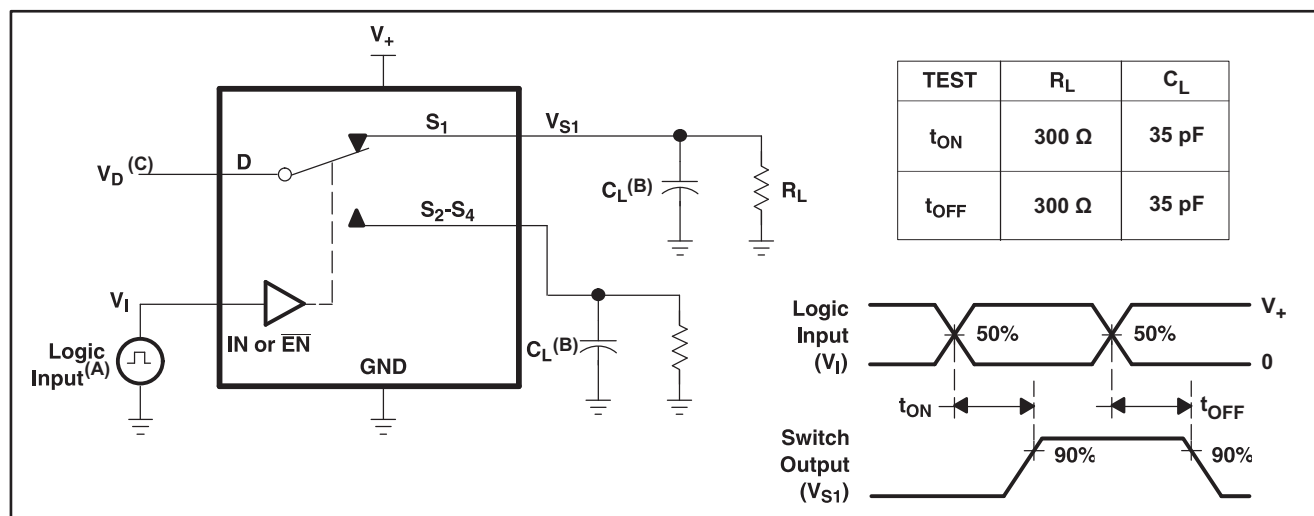

- All input pulses are supplied by generators having the following characteristics: PRR $\leq$ 10 MHz, $Z_O = 50 \Omega$, $t_r < 5$ ns, $t_f < 5$ ns.
- C_L includes probe and jig capacitance.
- See Electrical Characteristics for V_D .

Figure 17. Turn-On (t_{ON}) and Turn-Off Time (t_{OFF})

PARAMETER MEASUREMENT INFORMATION (continued)

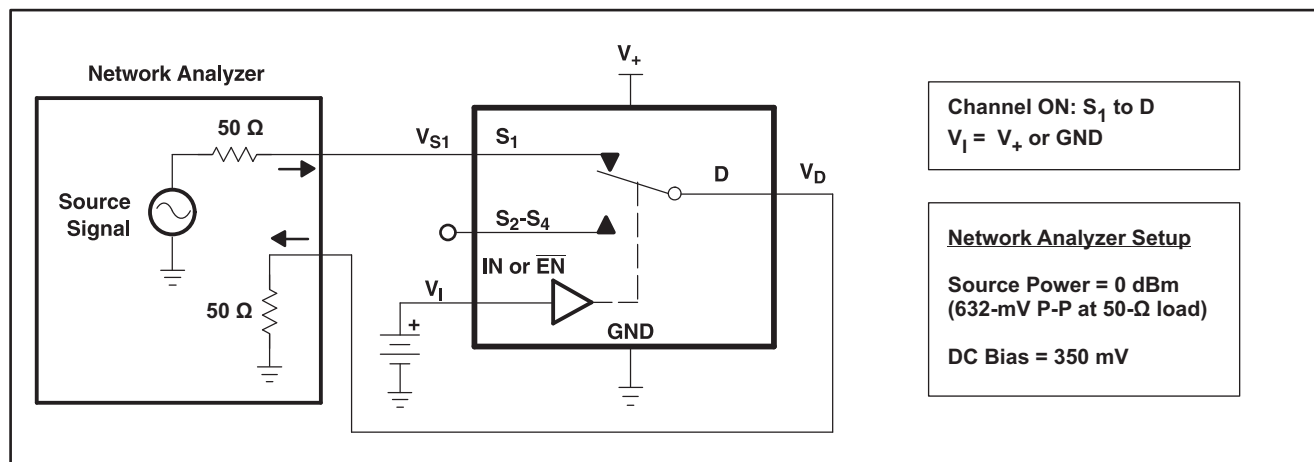
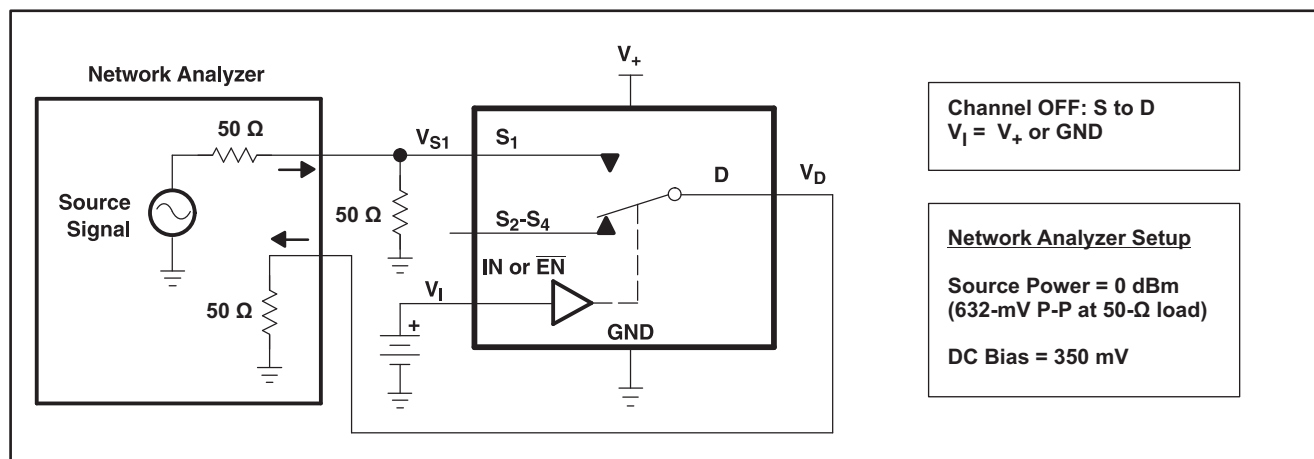
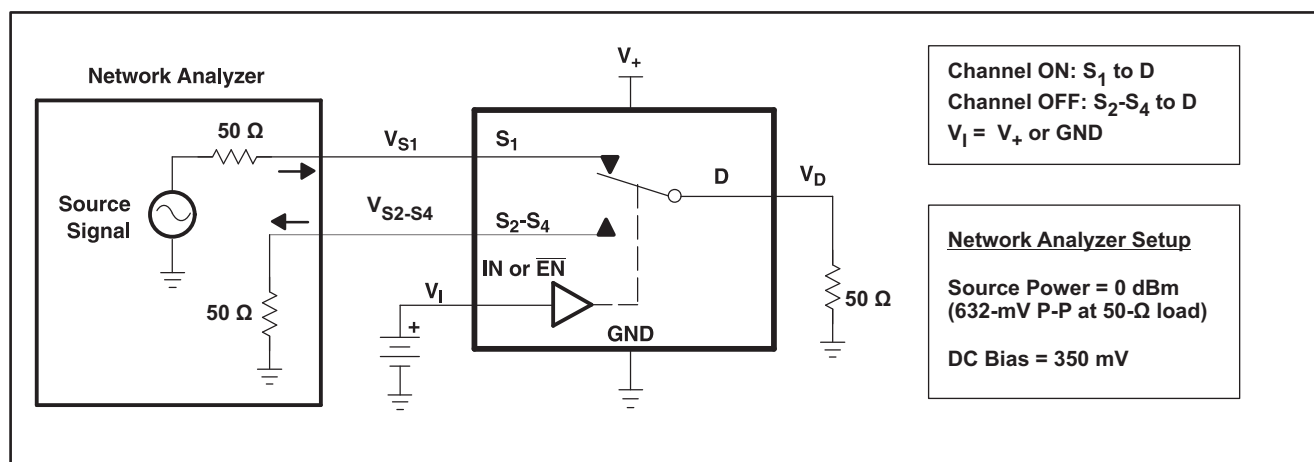


Figure 18. Bandwidth (BW)

Figure 19. OFF Isolation (O_{ISO})Figure 20. Crosstalk (X_{TALK})

PARAMETER MEASUREMENT INFORMATION (continued)



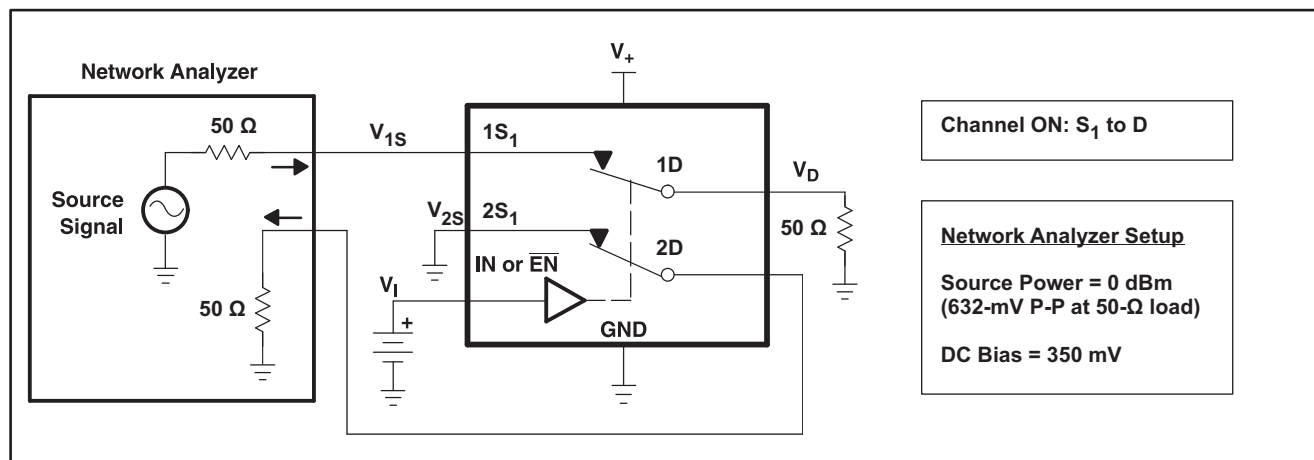


Figure 21. Adjacent Crosstalk (X_{TALK})

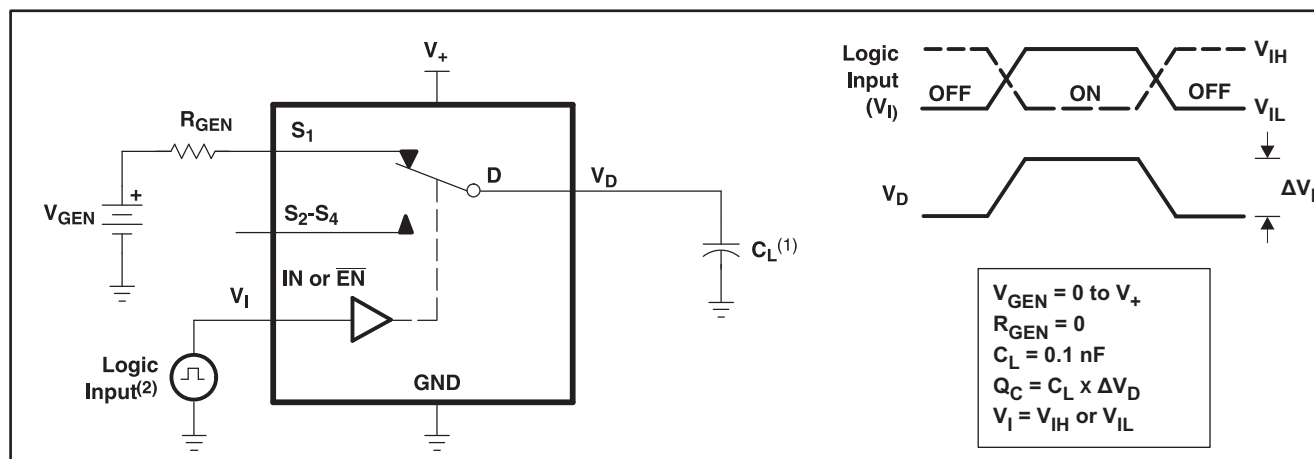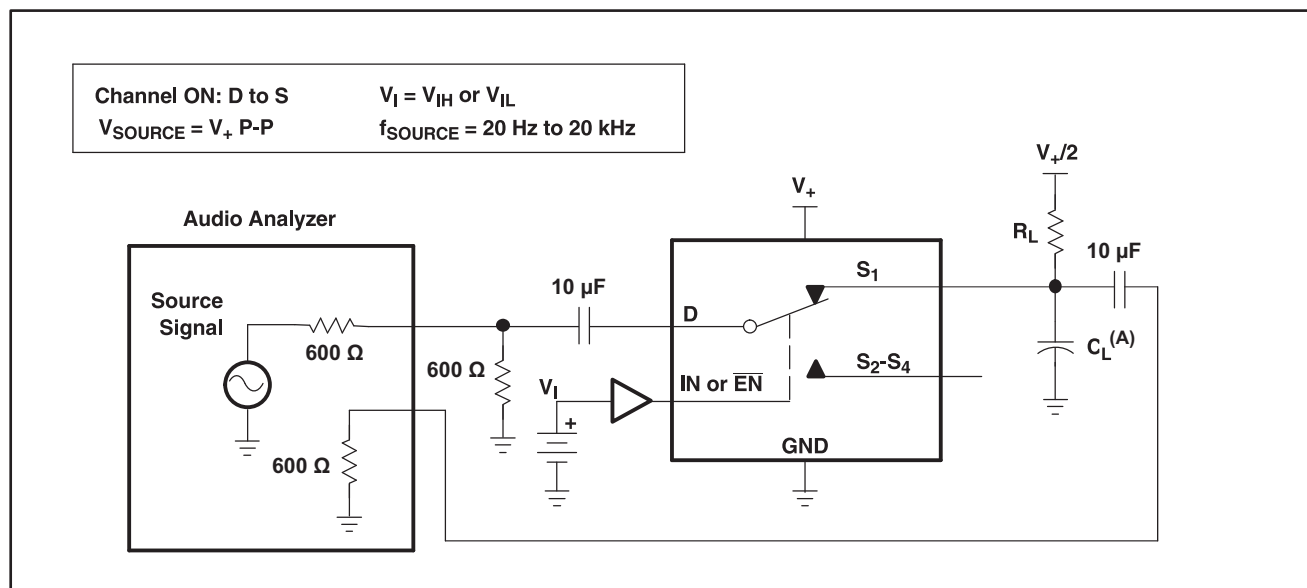

- A. All input pulses are supplied by generators having the following characteristics: $\text{PRR} \leq 10 \text{ MHz}$, $Z_0 = 50 \Omega$, $t_r < 5 \text{ ns}$, $t_f < 5 \text{ ns}$.
- B. C_1 includes probe and jig capacitance.

Figure 22. Charge Injection (Q_c)

PARAMETER MEASUREMENT INFORMATION (continued)

A. C_L includes probe and jig capacitance.

Figure 23. Total Harmonic Distortion (THD)

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TS3A5017D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TS3A5017	Samples
TS3A5017DBQR	ACTIVE	SSOP	DBQ	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	YA017	Samples
TS3A5017DBQRE4	ACTIVE	SSOP	DBQ	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	YA017	Samples
TS3A5017DBQRG4	ACTIVE	SSOP	DBQ	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	YA017	Samples
TS3A5017DE4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TS3A5017	Samples
TS3A5017DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TS3A5017	Samples
TS3A5017DGVR	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017DGVRE4	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017DGVRG4	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TS3A5017	Samples
TS3A5017DRE4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TS3A5017	Samples
TS3A5017DRG4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TS3A5017	Samples
TS3A5017PW	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017PWE4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017PWG4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017PWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017PWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TS3A5017PWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	YA017	Samples
TS3A5017RGYR	ACTIVE	VQFN	RGY	16	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	YA017	Samples
TS3A5017RGYRG4	ACTIVE	VQFN	RGY	16	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	YA017	Samples
TS3A5017RSV	PREVIEW	UQFN	RSV	16		TBD	Call TI	Call TI	-40 to 85		
TS3A5017RSVR	ACTIVE	UQFN	RSV	16	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	ZVL	Samples
TS3A5017RSVRG4	ACTIVE	UQFN	RSV	16	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	ZVL	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.



Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ Only one of markings shown within the brackets will appear on the physical device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

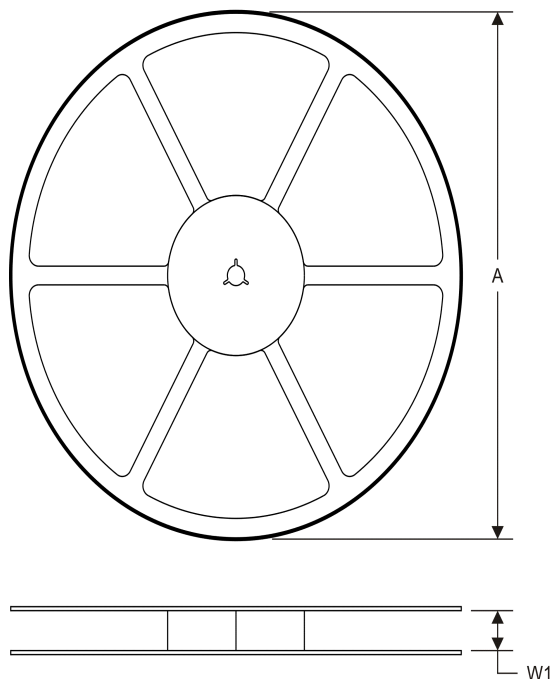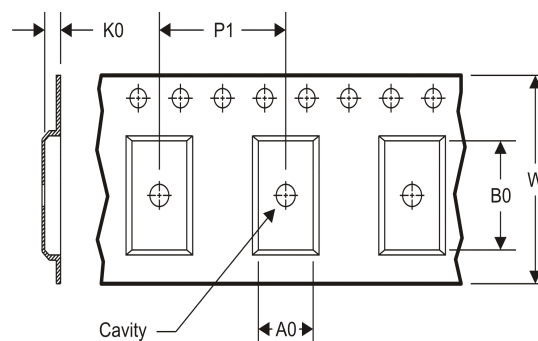TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


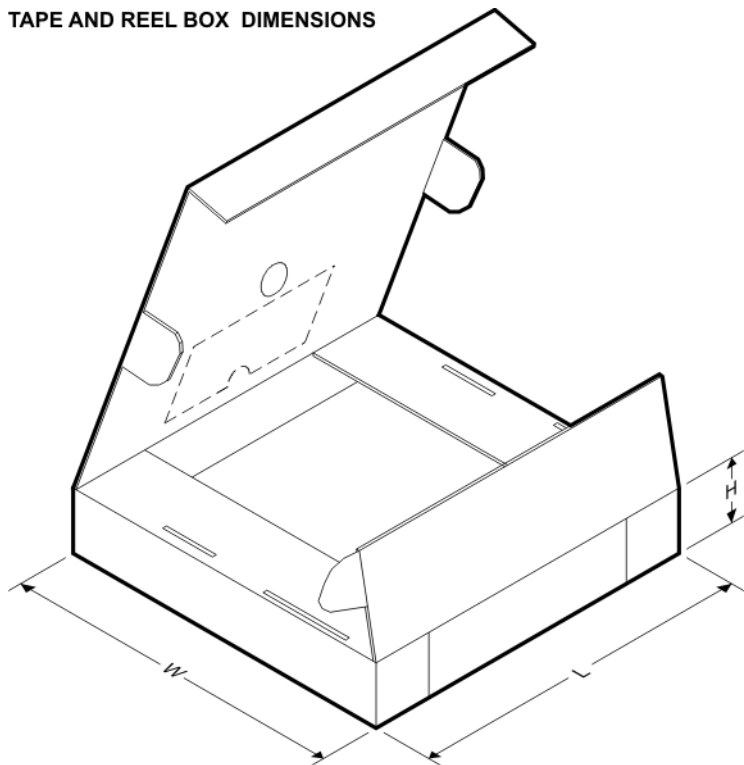
A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS3A5017DGVR	TVSOP	DGV	16	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
TS3A5017DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
TS3A5017PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TS3A5017RGYR	VQFN	RGY	16	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1
TS3A5017RSVR	UQFN	RSV	16	3000	180.0	12.4	2.1	2.9	0.75	4.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TS3A5017DGVR	TVSOP	DGV	16	2000	367.0	367.0	35.0
TS3A5017DR	SOIC	D	16	2500	333.2	345.9	28.6
TS3A5017PWR	TSSOP	PW	16	2000	367.0	367.0	35.0
TS3A5017RGYR	VQFN	RGY	16	3000	367.0	367.0	35.0
TS3A5017RSVR	UQFN	RSV	16	3000	203.0	203.0	35.0

D (R-PDSO-G16)


PLASTIC SMALL OUTLINE

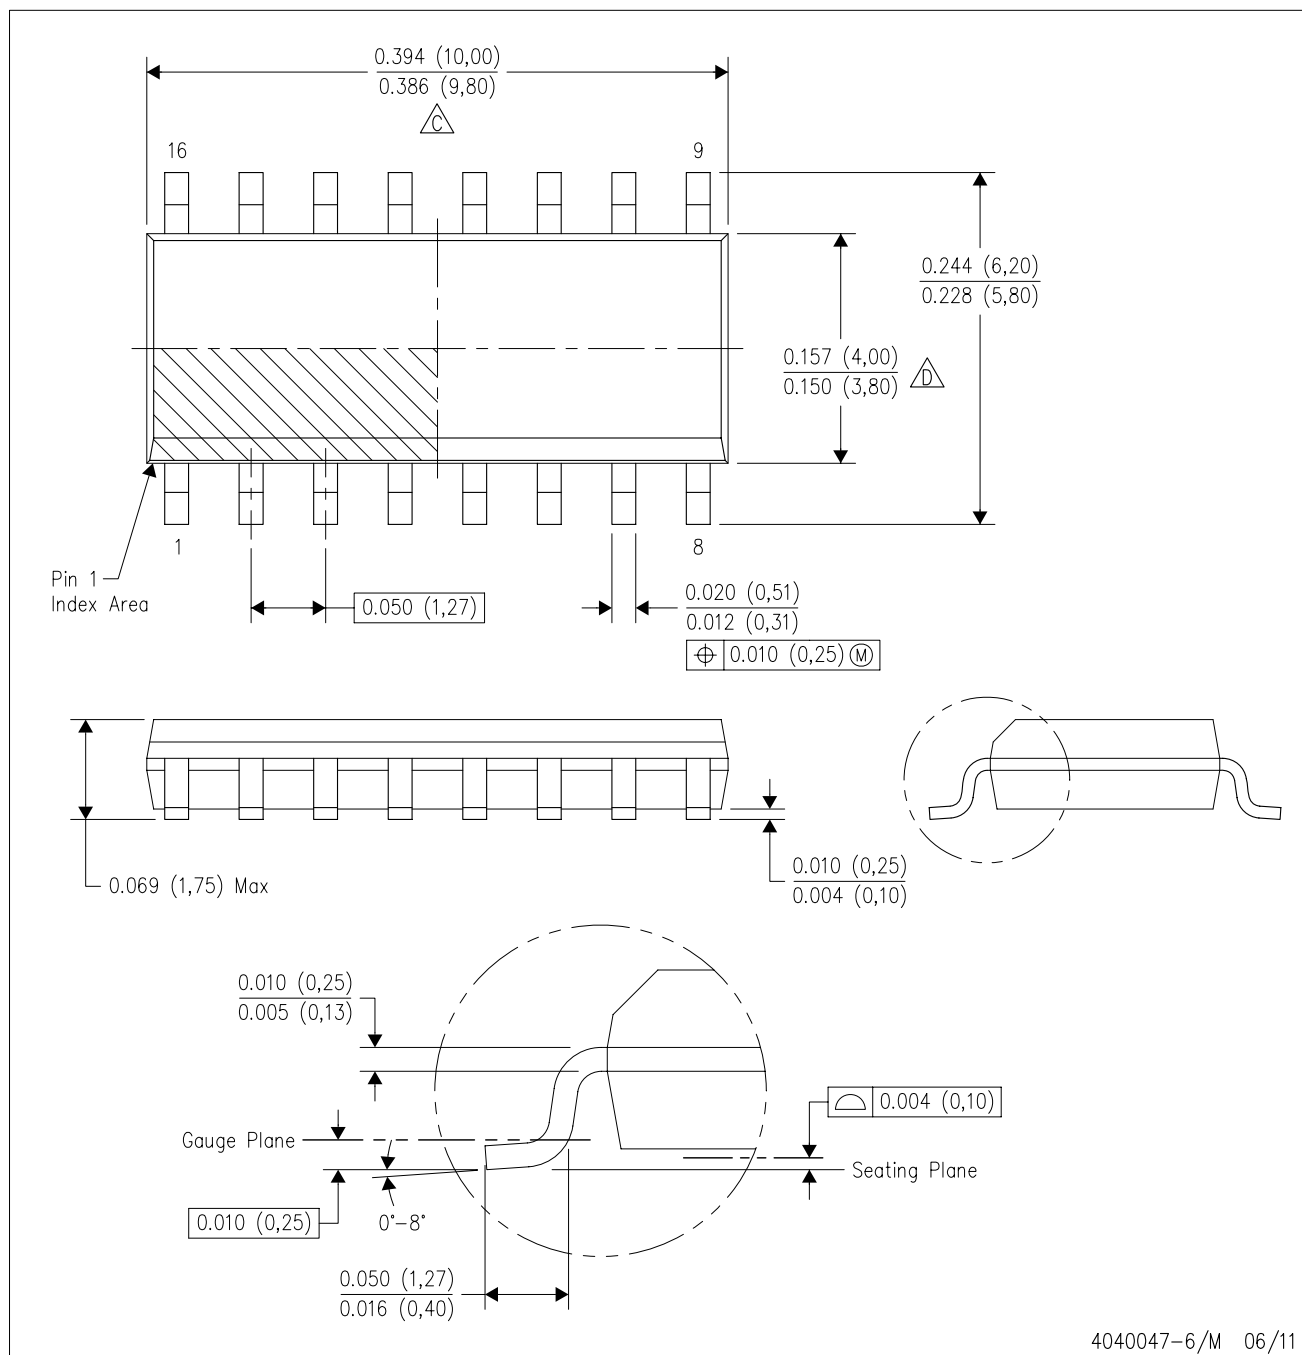

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - $\triangle C$ Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - $\triangle D$ Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AC.

PW (R-PDSO-G16)

PLASTIC SMALL OUTLINE

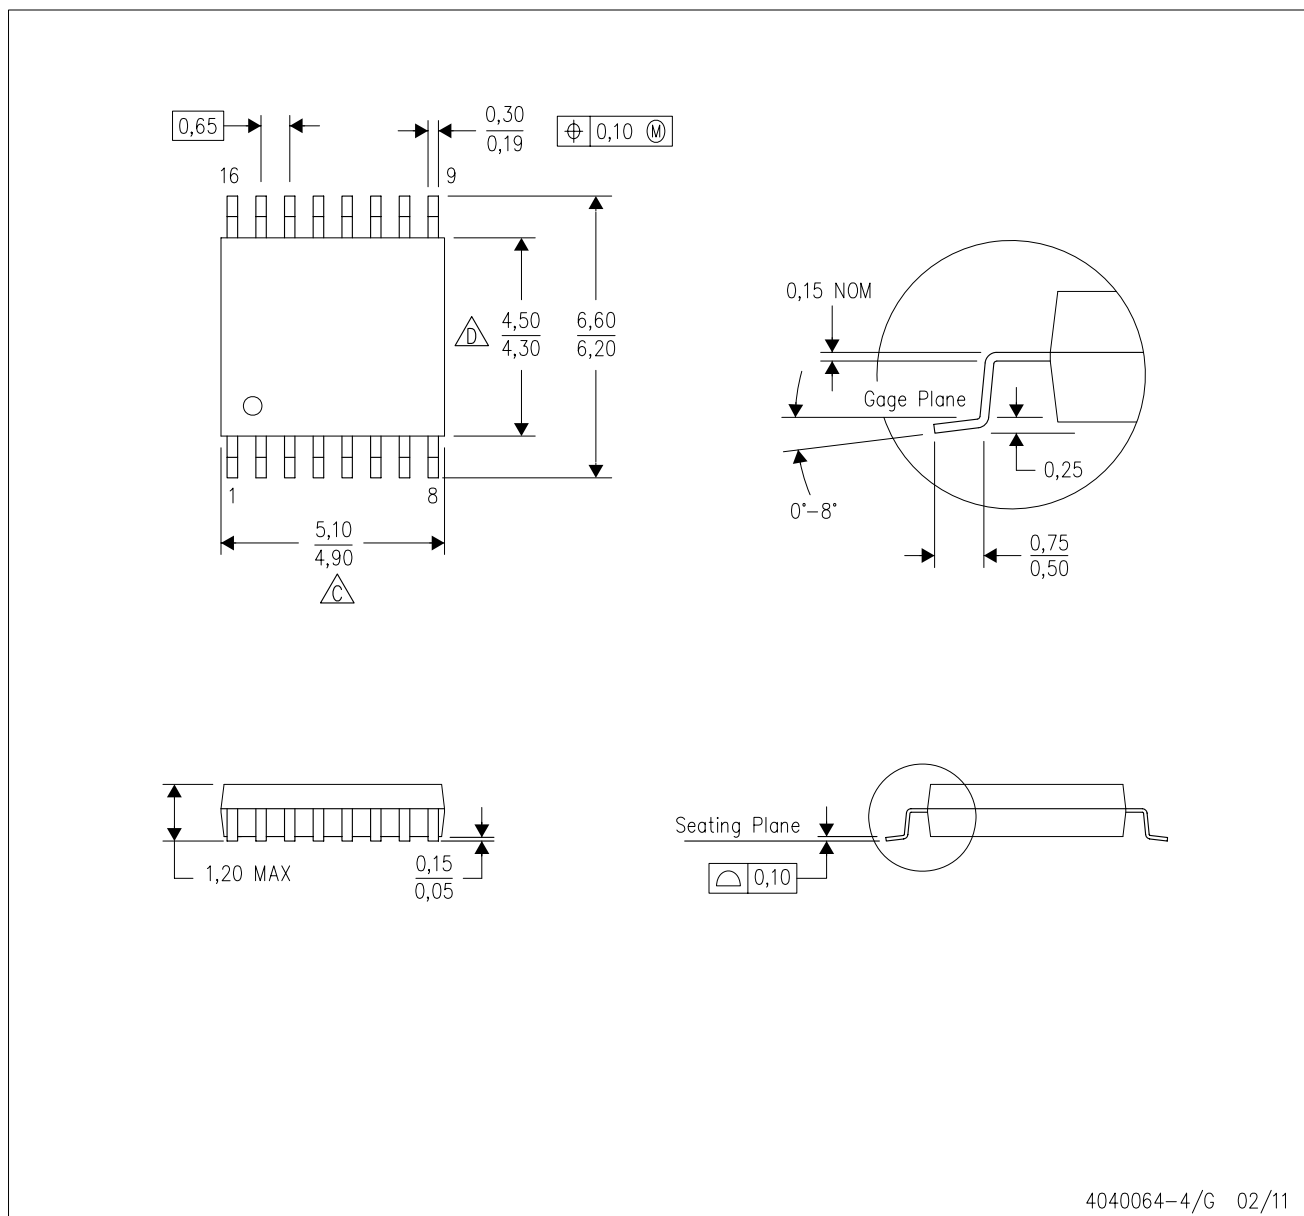


4040064-4/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
 - E. Falls within JEDEC MO-153

PW (R-PDSO-G16)

PLASTIC SMALL OUTLINE

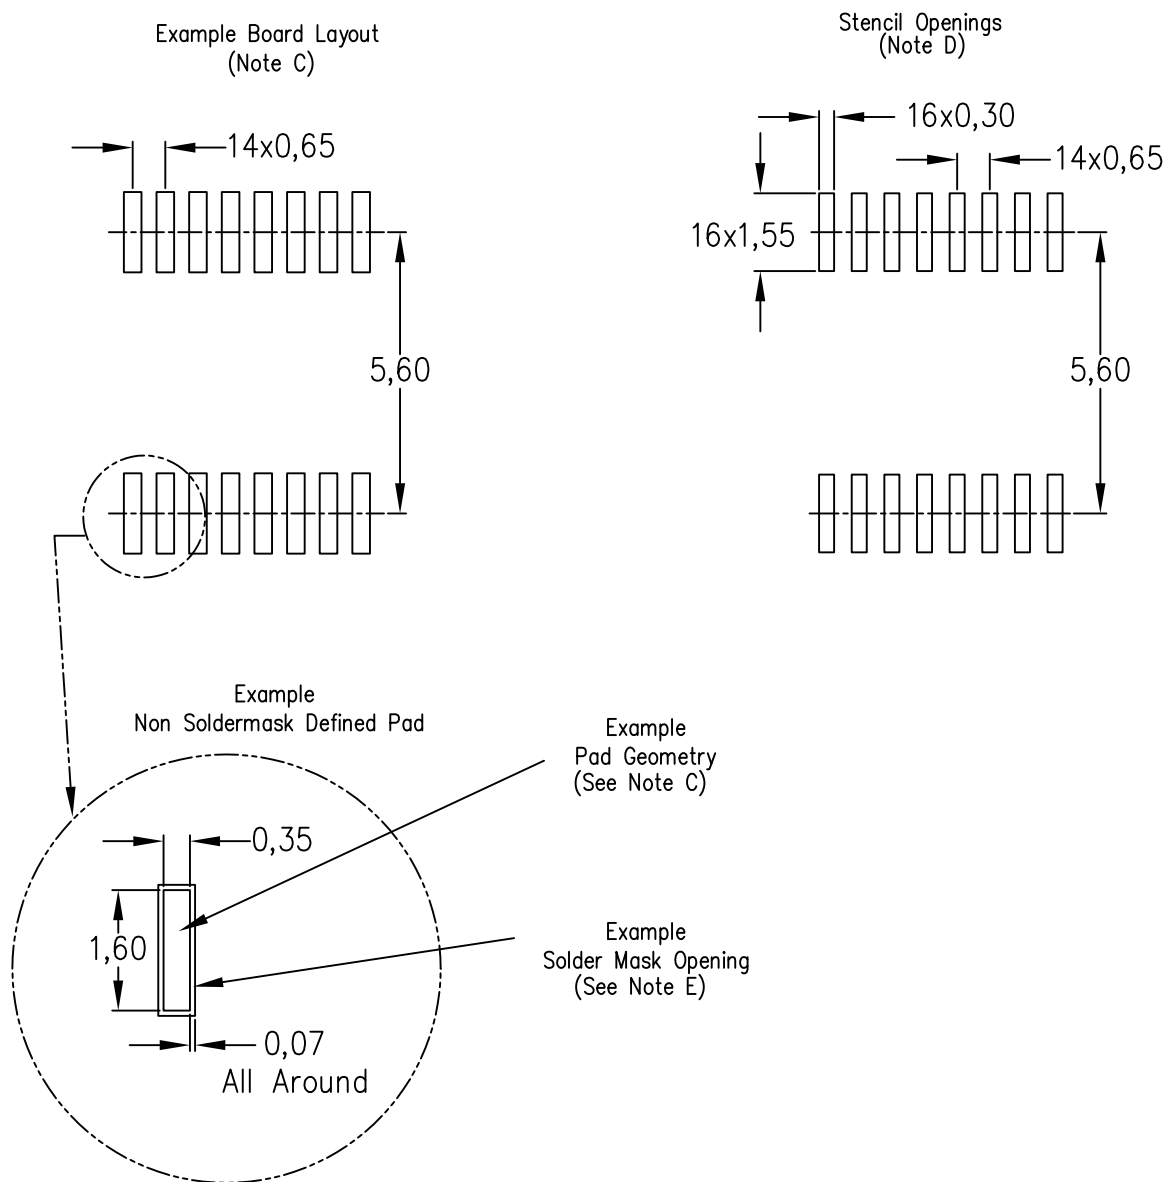


4211284-3/F 12/12

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

RGY (R-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

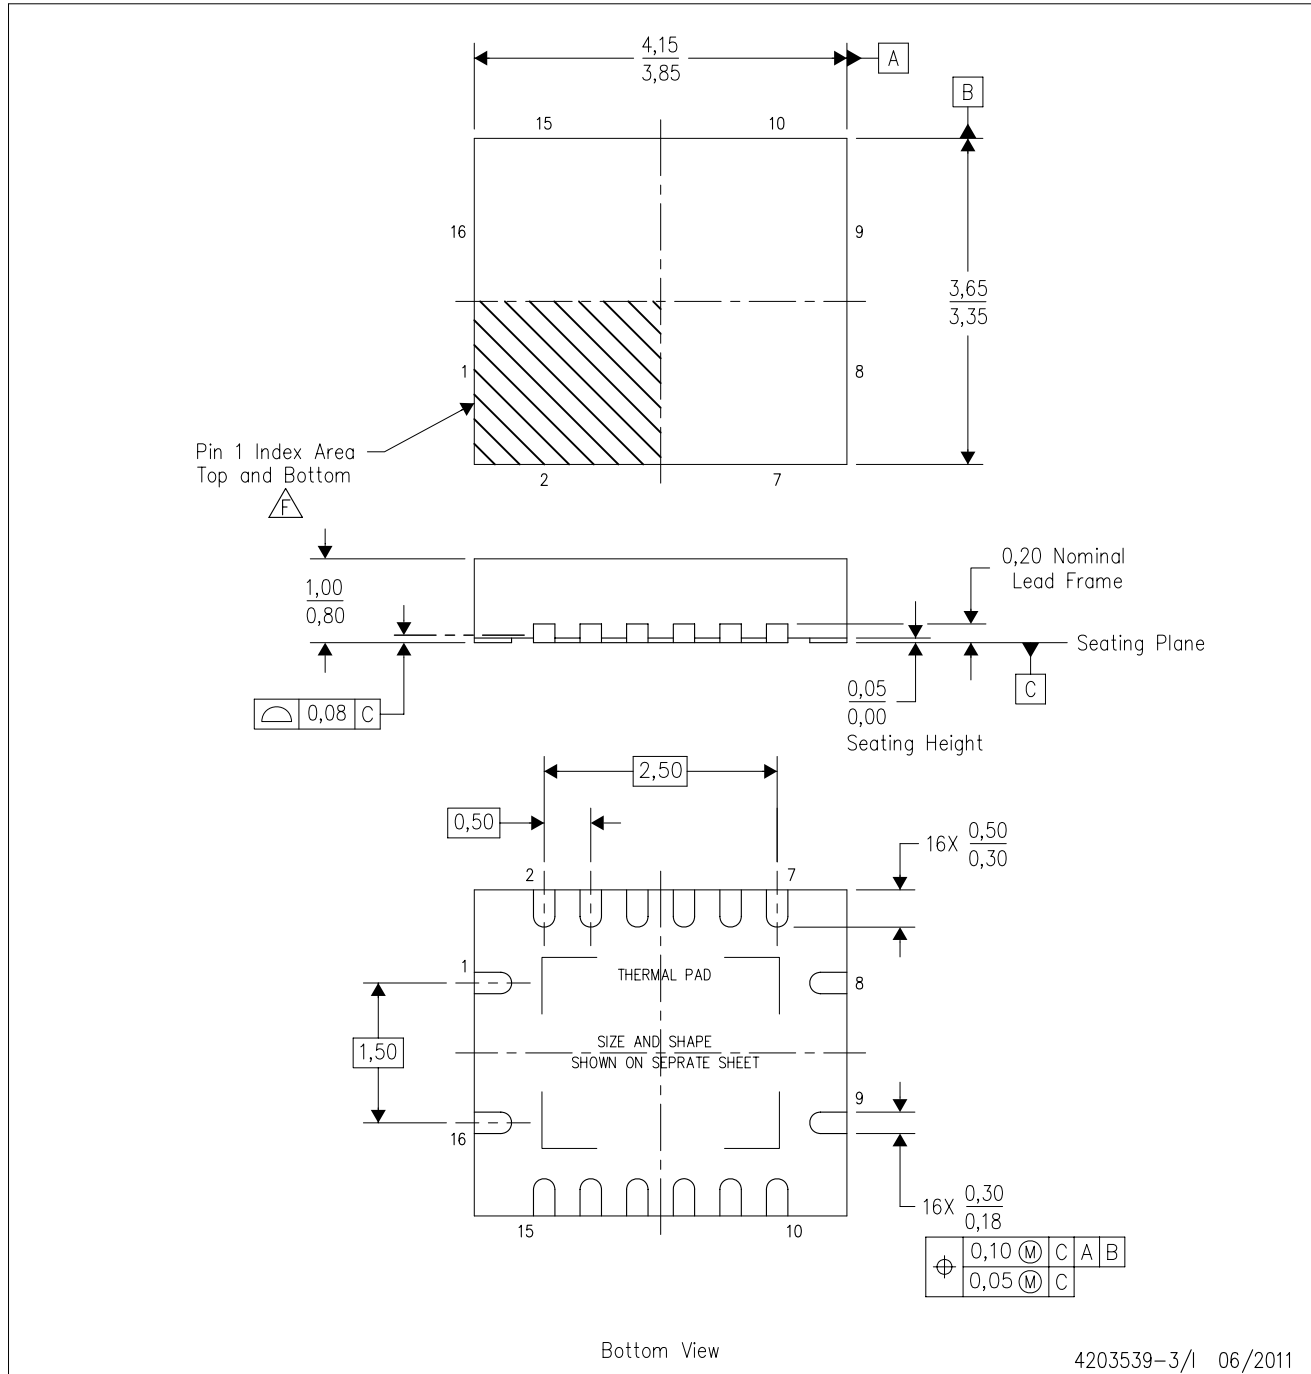

4203539-3/I 06/2011

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - This drawing is subject to change without notice.
 - QFN (Quad Flatpack No-Lead) package configuration.
 - The package thermal pad must be soldered to the board for thermal and mechanical performance.
 - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
 - Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.
 - Package complies to JEDEC MO-241 variation BA.

RGY (R-PVQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

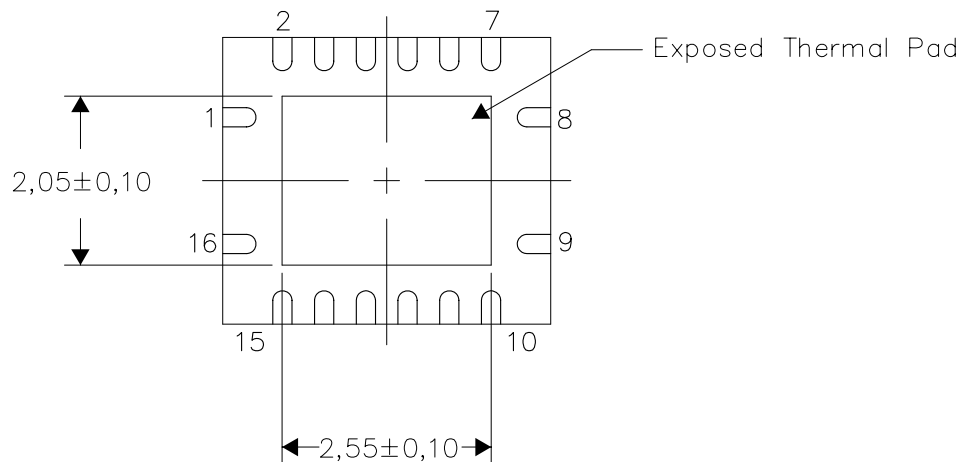


Bottom View

Exposed Thermal Pad Dimensions


4206353-3/0 11/11

NOTE: All linear dimensions are in millimeters

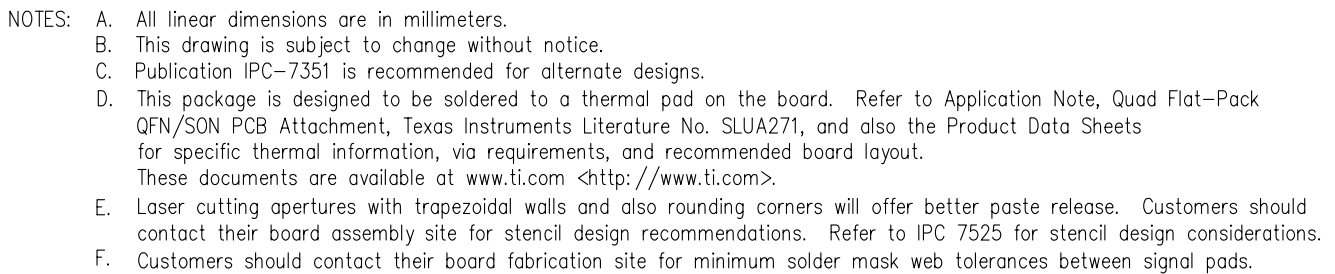

RSV (R-PUQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

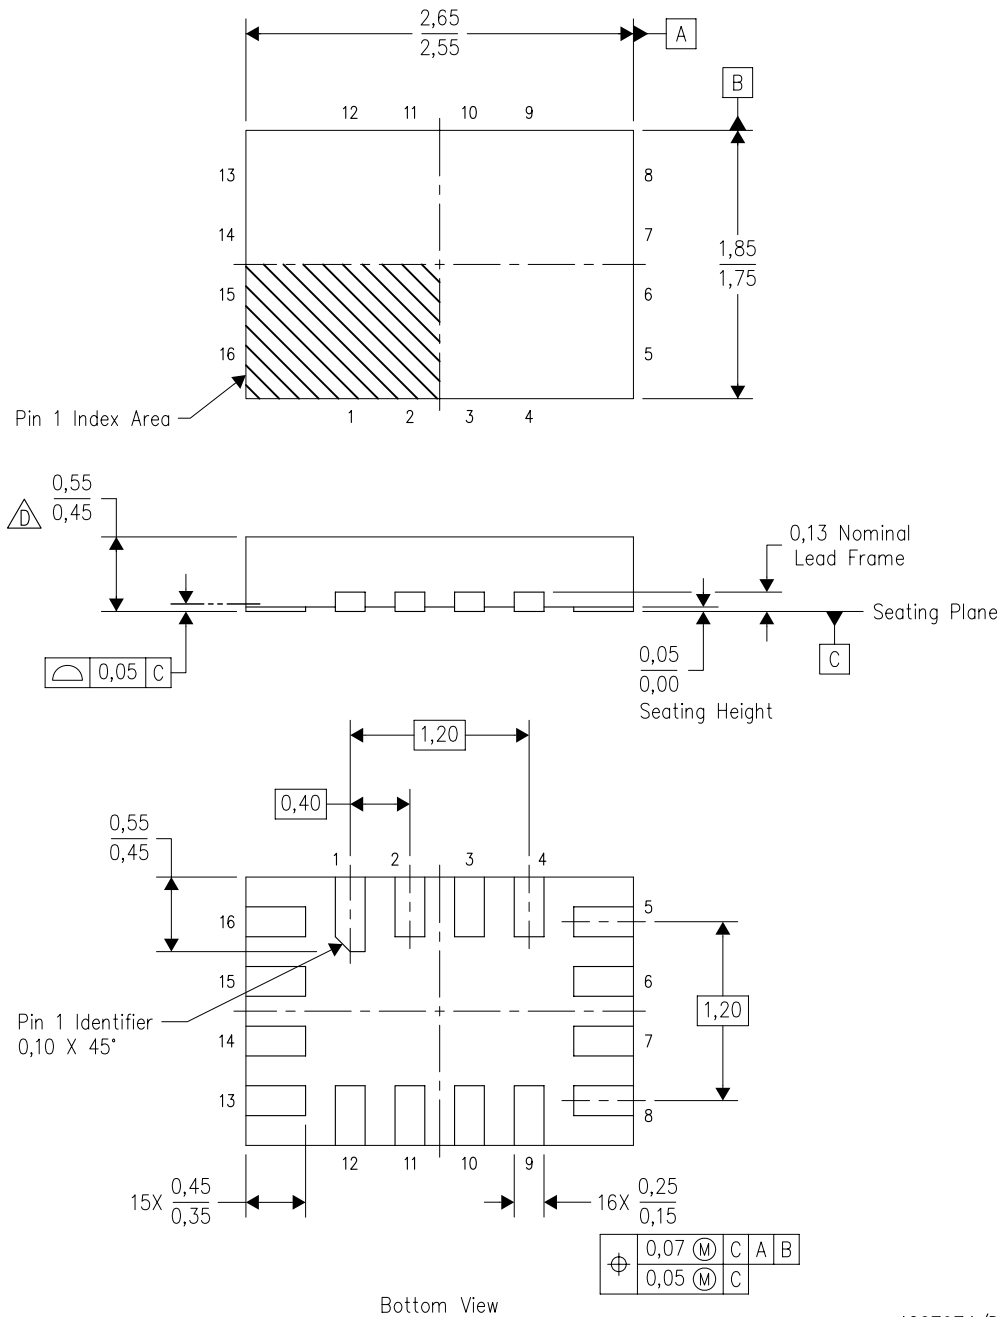


4207974/D 12/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. QFN (Quad Flatpack No-Lead) package configuration.
 - This package complies to JEDEC MO-288 variation UFHE, except minimum package thickness.

RSV (R-PUQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

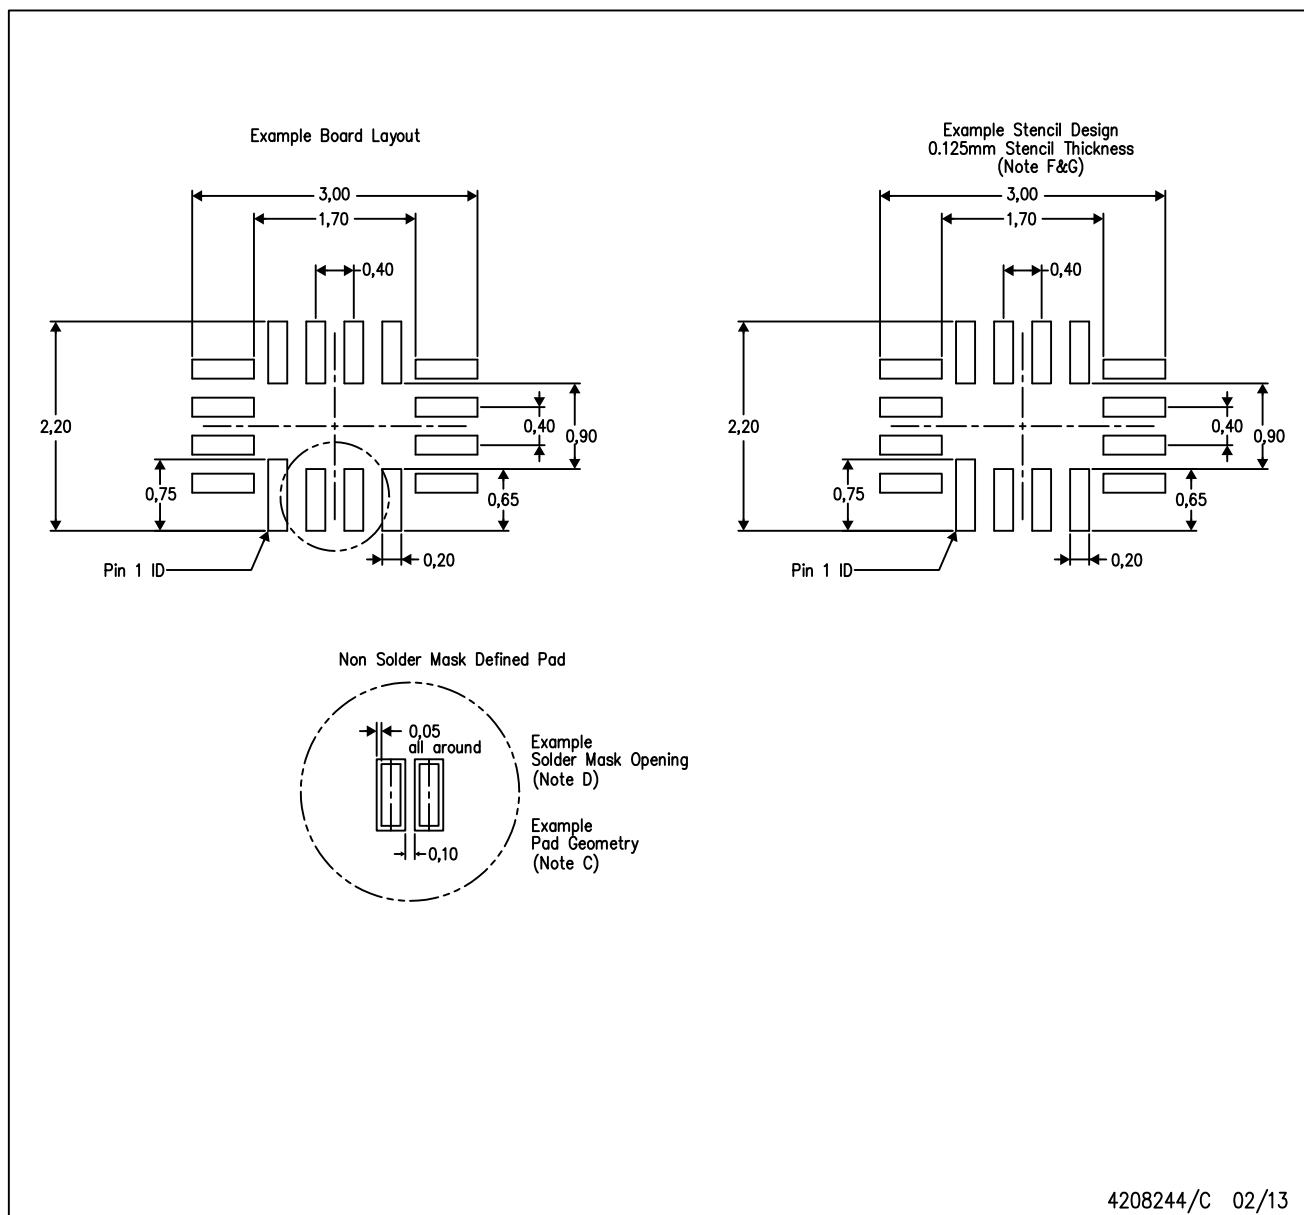

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
 - E. Maximum stencil thickness 0,127 mm (5 mils). All linear dimensions are in millimeters.
 - F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - G. Side aperture dimensions over-print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.

DBQ (R-PDSO-G16)


PLASTIC SMALL-OUTLINE PACKAGE

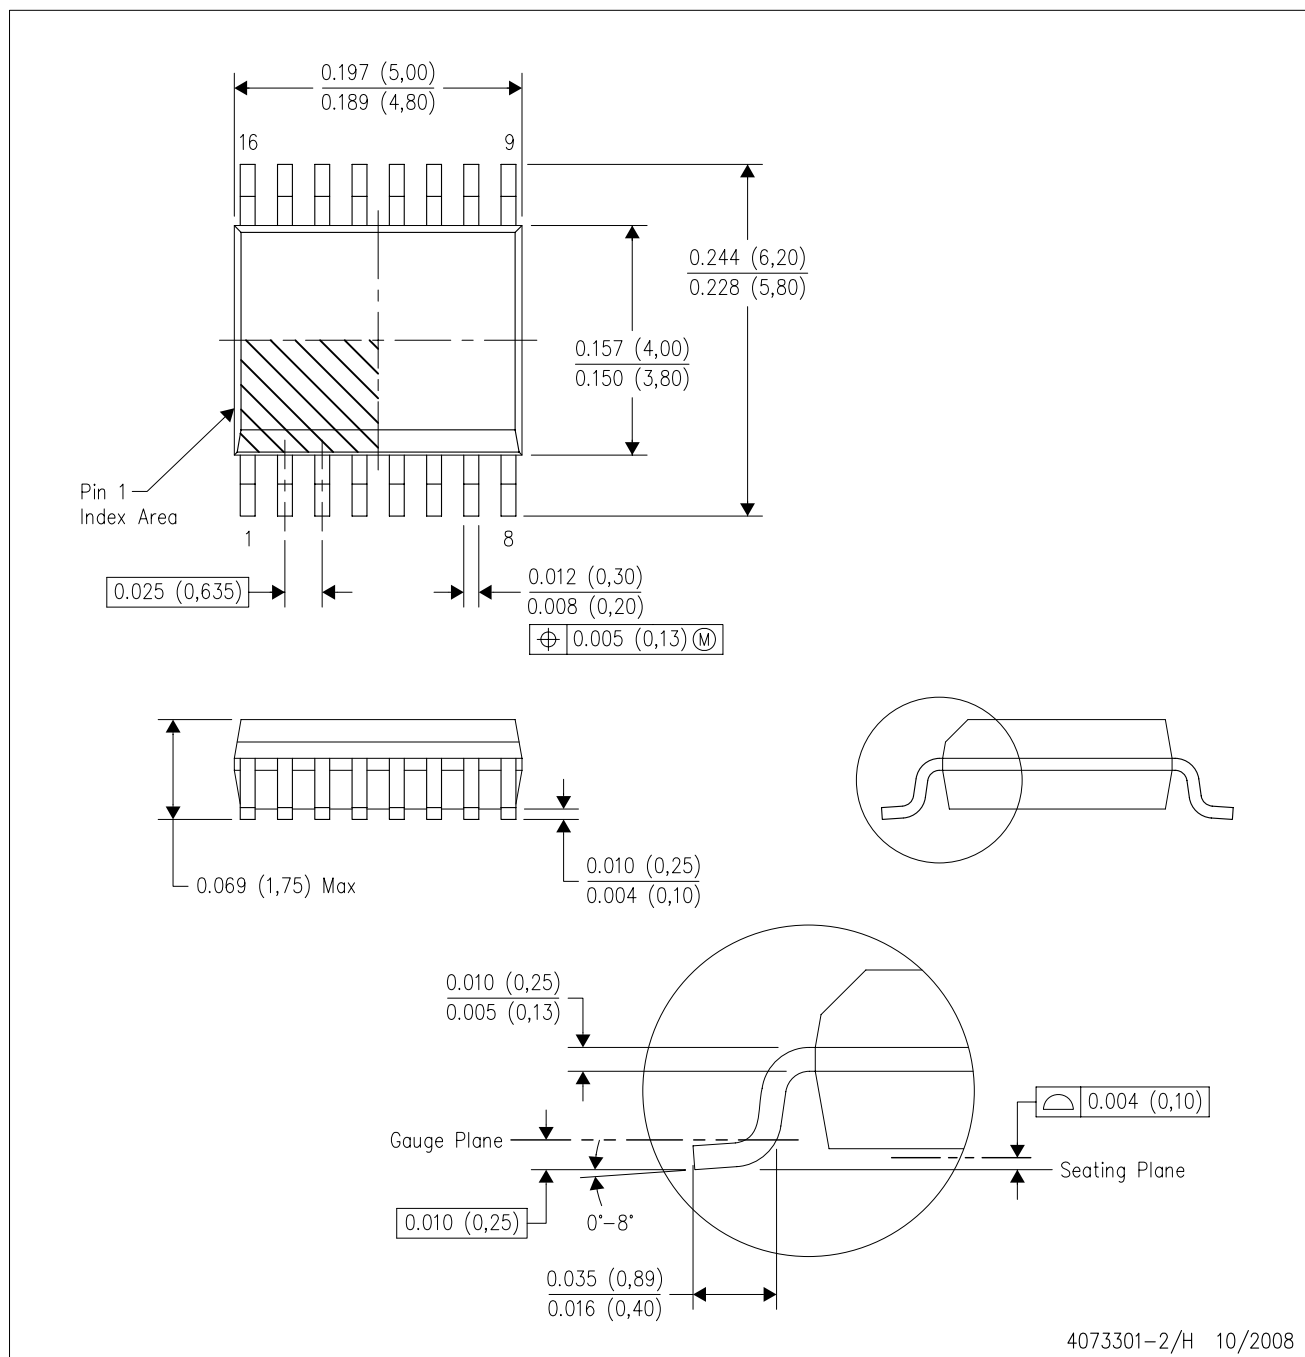

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
 - D. Falls within JEDEC MO-137 variation AB.

DBQ (R-PDSO-G16)

PLASTIC SMALL OUTLINE PACKAGE

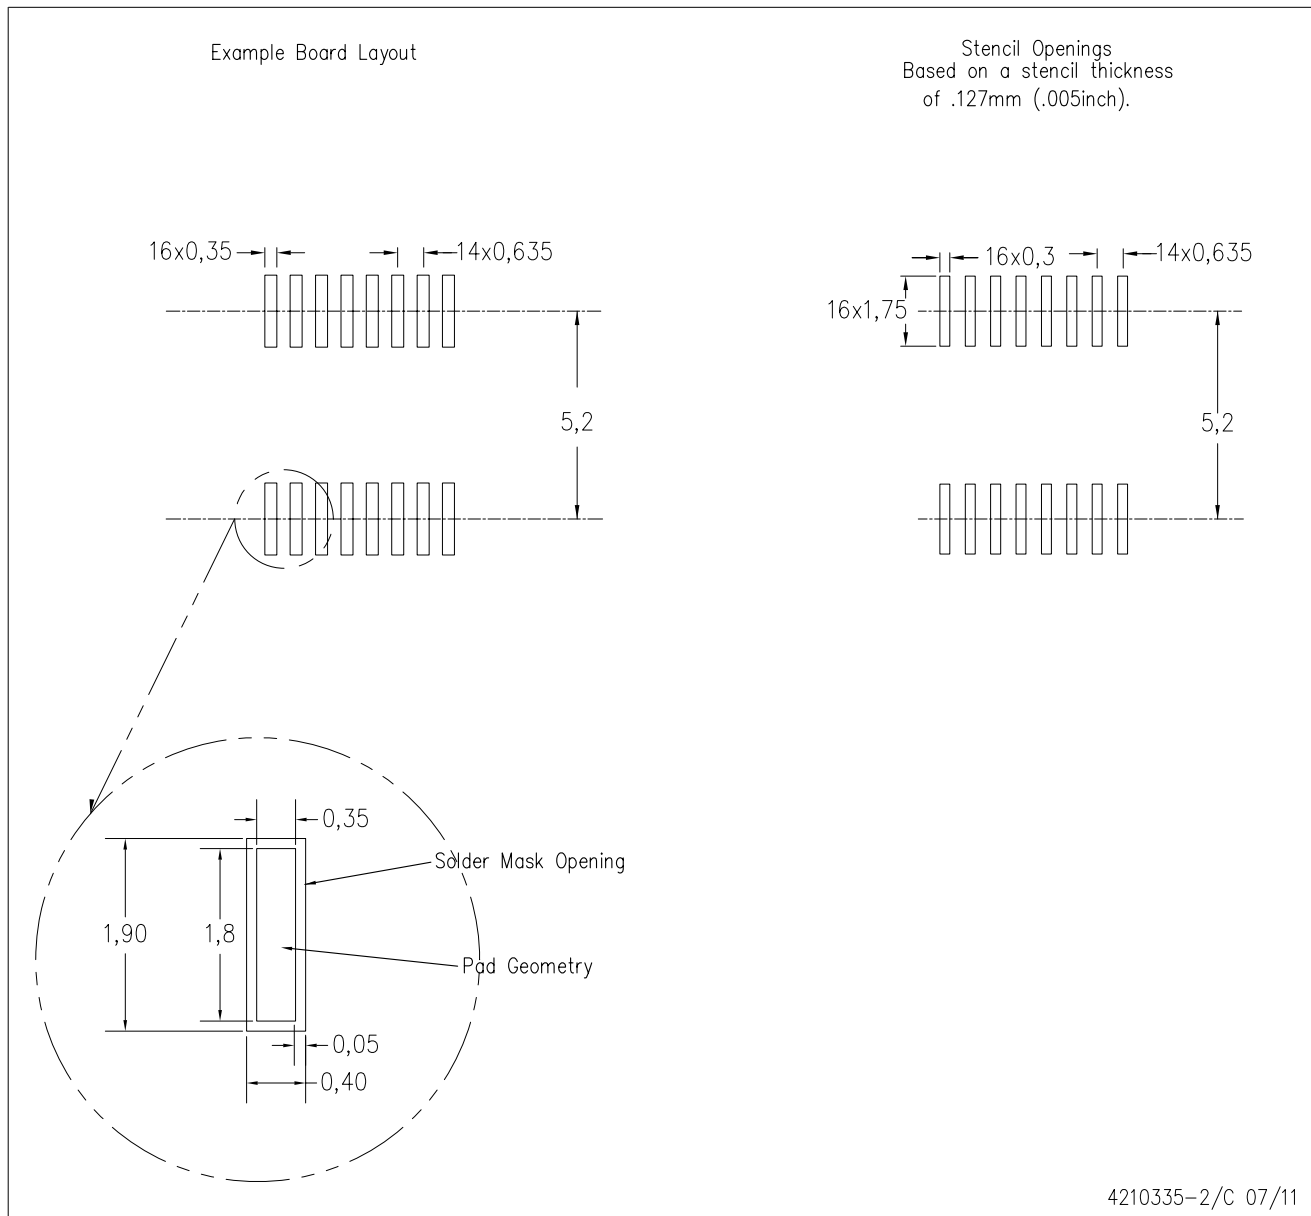

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
 - D. Publication IPC-7351 is recommended for alternate designs.
 - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com