

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

- **Low Noise**  
10 Hz . . . 15 nV/ $\sqrt{\text{Hz}}$   
1 kHz . . . 10.5 nV/ $\sqrt{\text{Hz}}$
- **10000-pF Load Capability**
- **20-mA Min Short-Circuit Output Current**
- **27-V/ $\mu\text{s}$  Min Slew Rate**
- **High Gain-Bandwidth Product . . . 5.9 MHz**
- **Low  $V_{\text{IO}}$  . . . 500  $\mu\text{V}$  Max at 25°C**
- **Single or Split Supply . . . 4 V to 44 V**
- **Fast Settling Time**  
340 ns to 0.1%  
400 ns to 0.01%
- **Saturation Recovery . . . 150 ns**
- **Large Output Swing**  
 $V_{\text{CC-}} + 0.1 \text{ V}$  to  $V_{\text{CC+}} - 1 \text{ V}$

## description

The TLE214x and TLE214xA devices are high-performance, internally compensated operational amplifiers built using Texas Instruments complementary bipolar Excalibur process. The TLE214xA is a tighter offset voltage grade of the TLE214x. Both are pin-compatible upgrades to standard industry products.

The design incorporates an input stage that simultaneously achieves low audio-band noise of 10.5 nV/ $\sqrt{\text{Hz}}$  with a 10-Hz 1/f corner and symmetrical 40-V/ $\mu\text{s}$  slew rate typically with loads up to 800 pF. The resulting low distortion and high power bandwidth are important in high-fidelity audio applications. A fast settling time of 340 ns to 0.1% of a 10-V step with a 2-k $\Omega$ /100-pF load is useful in fast actuator/positioning drivers. Under similar test conditions, settling time to 0.01% is 400 ns.

The devices are stable with capacitive loads up to 10 nF, although the 6-MHz bandwidth decreases to 1.8 MHz at this high loading level. As such, the TLE214x and TLE214xA are useful for low-droop sample-and-holds and direct buffering of long cables, including 4-mA to 20-mA current loops.

The special design also exhibits an improved insensitivity to inherent integrated circuit component mismatches as is evidenced by a 500- $\mu\text{V}$  maximum offset voltage and 1.7- $\mu\text{V}/^\circ\text{C}$  typical drift. Minimum common-mode rejection ratio and supply-voltage rejection ratio are 85 dB and 90 dB, respectively.

Device performance is relatively independent of supply voltage over the  $\pm 2\text{-V}$  to  $\pm 22\text{-V}$  range. Inputs can operate between  $V_{\text{CC-}} - 0.3$  to  $V_{\text{CC+}} - 1.8 \text{ V}$  without inducing phase reversal, although excessive input current may flow out of each input exceeding the lower common-mode input range. The all-npn output stage provides a nearly rail-to-rail output swing of  $V_{\text{CC-}} - 0.1$  to  $V_{\text{CC+}} - 1 \text{ V}$  under light current-loading conditions. The device can sustain shorts to either supply since output current is internally limited, but care must be taken to ensure that maximum package power dissipation is not exceeded.

Both versions can also be used as comparators. Differential inputs of  $V_{\text{CC}\pm}$  can be maintained without damage to the device. Open-loop propagation delay with TTL supply levels is typically 200 ns. This gives a good indication as to output stage saturation recovery when the device is driven beyond the limits of recommended output swing.

Both the TLE214x and TLE214xA are available in a wide variety of packages, including both the industry-standard 8-pin small-outline version and chip form for high-density system applications. The C-suffix devices are characterized for operation from 0°C to 70°C, I-suffix devices from -40°C to 105°C, and M-suffix devices over the full military temperature range of -55°C to 125°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997 – 2006, Texas Instruments Incorporated

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

### TLE2141 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES           |                           |                         |
|----------------|--------------------------------|----------------------------|---------------------------|-------------------------|
|                |                                | SMALL OUT-<br>LINE†<br>(D) | CERAMIC DIP<br>(JG)       | PLASTIC DIP<br>(P)      |
| 0°C to 70°C    | 500 µV<br>900 µV               | TLE2141ACD<br>TLE2141CD    | —                         | TLE2141ACP<br>TLE2141CP |
| –40°C to 105°C | 500 µV<br>900 µV               | TLE2141AID<br>TLE2141ID    | —                         | TLE2141AIP<br>TLE2141IP |
| –55°C to 125°C | 500 µV<br>900 µV               | —<br>TLE2141MD             | TLE2141AMJG<br>TLE2141MJG | —<br>—                  |

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2141ACDR).

### TLE2142 AVAILABLE OPTIONS

| PACKAGED DEVICES |                                |                          |                         |                        |                       |                |                             |
|------------------|--------------------------------|--------------------------|-------------------------|------------------------|-----------------------|----------------|-----------------------------|
| T <sub>A</sub>   | V <sub>IO</sub> max<br>AT 25°C | SMALL<br>OUTLINE†<br>(D) | CHIP<br>CARRIER<br>(FK) | CERAMIC<br>DIP<br>(JG) | PLASTIC<br>DIP<br>(P) | TSSOP‡<br>(PW) | CERAMIC<br>FLAT PACK<br>(U) |
| 0°C to 70°C      | 750 µV<br>1200 µV              | TLE2142ACD               | —                       | —                      | TLE2142ACP            | —              | —                           |
|                  |                                | TLE2142CD                | —                       | —                      | TLE2142CP             | TLE2142CPWLE   | —                           |
| –40°C to 105°C   | 750 µV<br>1200 µV              | TLE2142AID               | —                       | —                      | TLC2142AIP            | —              | —                           |
|                  |                                | TLE2142ID                | —                       | —                      | TLC2142IP             | —              | —                           |
| –55°C to 125°C   | 750 µV<br>1200 µV              | TLE2142AMD               | TLE2142AMFK             | TLE2142AMJG            | —                     | —              | TLE2142AMU                  |
|                  |                                | TLE2142MD                | TLE2142MFK              | TLE2142MJG             | —                     | —              | TLE2142MU                   |

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLC2142ACDR).


‡ The PW packages are available left-ended taped and reeled. Add LE the suffix to device type (e.g., TLC2142CPWLE).

### TLE2144 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES       |                           |                         |                         |
|----------------|--------------------------------|------------------------|---------------------------|-------------------------|-------------------------|
|                |                                | SMALL OUTLINE†<br>(DW) | CHIP CARRIER<br>(FK)      | CERAMIC DIP<br>(J)      | PLASTIC DIP<br>(N)      |
| 0°C to 70°C    | 1.5 mV<br>2.4 mV               | —<br>TLE2144CDW        | —<br>—                    | —<br>—                  | TLE2144ACN<br>TLE2144CN |
|                |                                | —<br>TLE2144IDW        | —<br>—                    | —<br>—                  | TLE2144AIN<br>TLE2144IN |
| –40°C to 105°C | 1.5 mV<br>2.4 mV               | —<br>TLE2144MDW        | TLE2144AMFK<br>TLE2144MFK | TLE2144AMJ<br>TLE2144MJ | —<br>—                  |
|                |                                | —<br>TLE2144MDW        | —<br>—                    | —<br>—                  | —<br>—                  |

† The DW packages are available taped and reeled. Add R suffix to device type (e.g., TLE2144CDWR).

### symbol

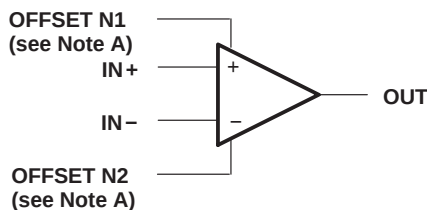


NOTES: A. OFFSET N1 AND OFFSET N2 are only available on the TLE2241x devices.

# TLE214x, TLE214xA


## EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006


**TLE2141**  
D, JG, OR P PACKAGE  
(TOP VIEW)

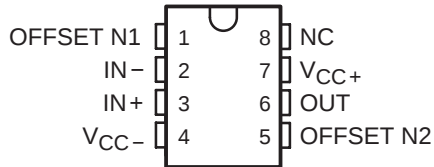


**TLE2141**  
FK PACKAGE  
(TOP VIEW)

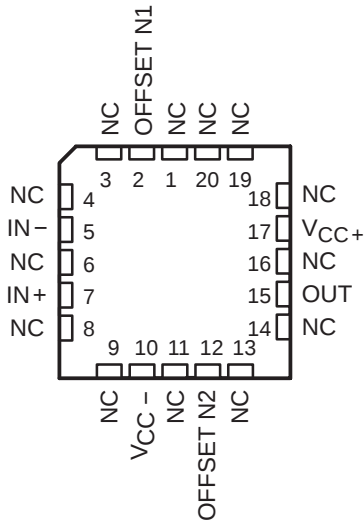


**TLE2144**  
DW PACKAGE  
(TOP VIEW)




**TLE2142**  
PW PACKAGE  
(TOP VIEW)




**TLE2142**  
U PACKAGE  
(TOP VIEW)




**TLE2142**  
D, JG, OR P PACKAGE  
(TOP VIEW)




**TLE2142**  
FK PACKAGE  
(TOP VIEW)

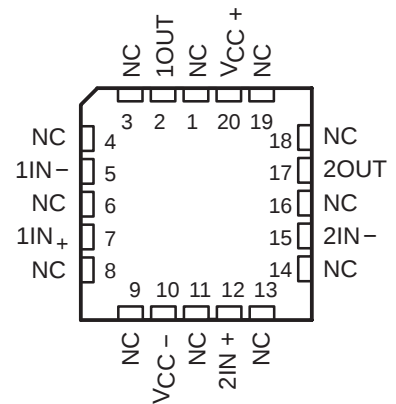

**TLE2144**  
J OR N PACKAGE  
(TOP VIEW)




**TLE2144**  
FK PACKAGE  
(TOP VIEW)

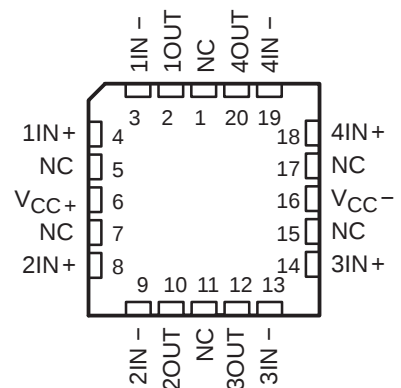

NC – No internal connection

TLE214x, TLE214xA, TLE214xY  
EXCALIBUR LOW-NOISE HIGH-SPEED  
PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBURARY 1997 – REVISED JUNE 2006

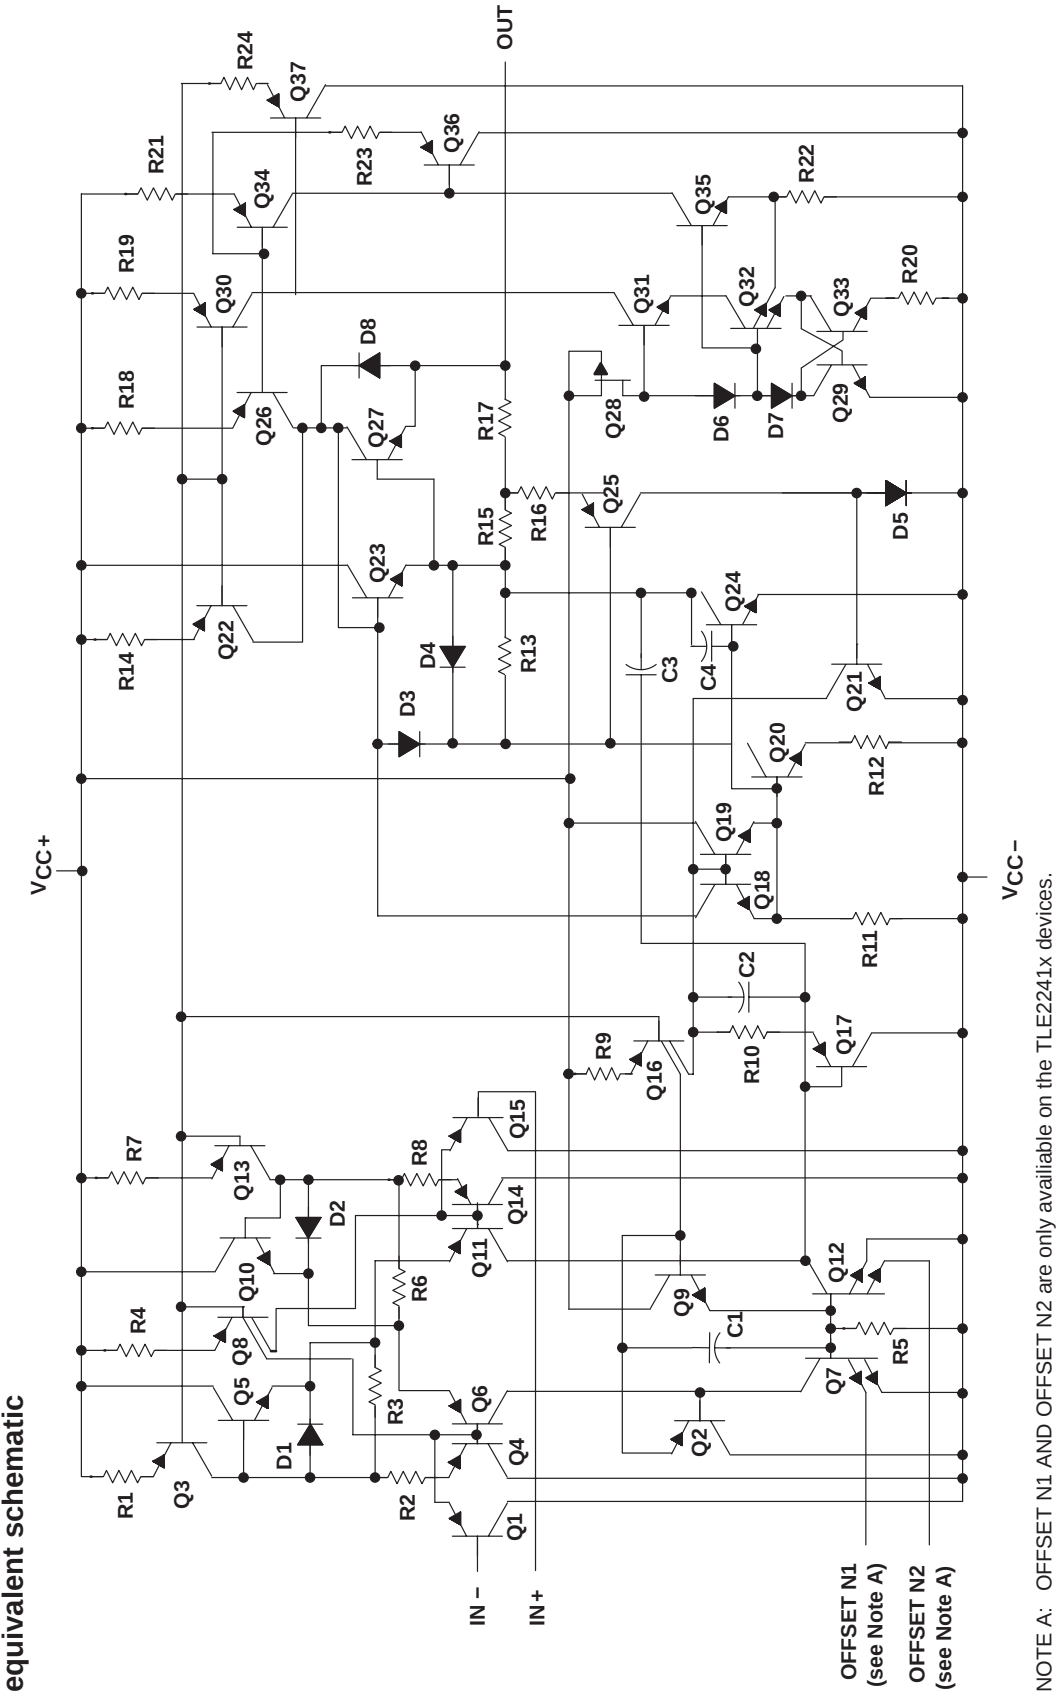

| ACTUAL DEVICE COMPONENT COUNT |         |         |         |  |
|-------------------------------|---------|---------|---------|--|
| COMPONENT                     | TLE2241 | TLE2242 | TLE2244 |  |
| Transistors                   | 46      | 65      | 130     |  |
| Resistors                     | 24      | 43      | 86      |  |
| Diodes                        | 8       | 14      | 28      |  |
| Capacitors                    | 4       | 8       | 16      |  |
| Epi-FET                       | 1       | 1       | 2       |  |

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>**

|                                                                                          |                                |
|------------------------------------------------------------------------------------------|--------------------------------|
| Supply voltage, $V_{CC+}$ (see Note 1)                                                   | 22 V                           |
| Supply voltage, $V_{CC-}$                                                                | –22 V                          |
| Differential input voltage, $V_{ID}$ (see Note 2)                                        | ±44 V                          |
| Input voltage range, $V_I$ (any input)                                                   | $V_{CC+}$ to $V_{CC-} - 0.3$ V |
| Input current, $I_I$ (each input)                                                        | ±1 mA                          |
| Output current, $I_O$                                                                    | ±80 mA                         |
| Total current into $V_{CC+}$                                                             | 80 mA                          |
| Total current out of $V_{CC-}$                                                           | 80 mA                          |
| Duration of short-circuit current at (or below) 25°C (see Note 3)                        | unlimited                      |
| Package thermal impedance, $\theta_{JA}$ (see Notes 4 and 5): D package                  | 97.1°C/W                       |
| DW package                                                                               | 57.3°C/W                       |
| N package                                                                                | 79.7°C/W                       |
| P package                                                                                | 84.6°C/W                       |
| PW package                                                                               | 108.4°C/W                      |
| Package thermal impedance, $\theta_{JC}$ (see Notes 4 and 5): FK package                 | 5.6°C/W                        |
| J package                                                                                | 15.1°C/W                       |
| JG package                                                                               | 14.5°C/W                       |
| U package                                                                                | 14.7°C/W                       |
| Operating free-air temperature range, $T_A$ : C suffix                                   | 0°C to 70°C                    |
| I suffix                                                                                 | –40°C to 105°C                 |
| M suffix                                                                                 | –55°C to 125°C                 |
| Storage temperature range                                                                | –65°C to 150°C                 |
| Case temperature for 60 seconds: FK package                                              | 260°C                          |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, DW, N, P, or PW package | 260°C                          |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J or JG package            | 300°C                          |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
  2. Differential voltages are at  $IN+$  with respect to  $IN-$ . Excessive current flows, if input, are brought below  $V_{CC-} - 0.3$  V.
  3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.
  4. Maximum power dissipation is a function of  $T_J(\max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.
  5. The package thermal impedance is calculated in accordance with JESD 51-7 (plastic) or MIL-STD-883 Method 1012 (ceramic).

**recommended operating conditions**

|                                       |                        | C SUFFIX |      | I SUFFIX |      | M SUFFIX |      | UNIT |
|---------------------------------------|------------------------|----------|------|----------|------|----------|------|------|
|                                       |                        | MIN      | MAX  | MIN      | MAX  | MIN      | MAX  |      |
| Supply voltage, $V_{CC\pm}$           |                        | ±2       | ±22  | ±2       | ±22  | ±2       | ±22  | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{CC} = 5$ V         | 0        | 2.9  | 0        | 2.7  | 0        | 2.7  | V    |
|                                       | $V_{CC\pm} = \pm 15$ V | –15      | 12.9 | –15      | 12.7 | –15      | 12.7 |      |
| Operating free-air temperature, $T_A$ |                        | 0        | 70   | –40      | 105  | –55      | 125  | °C   |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141C electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                                                  | $T_A^\dagger$ | TLE2141C |             |     | TLE2141AC |             |     | UNIT                         |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------|----------|-------------|-----|-----------|-------------|-----|------------------------------|
|                                                                               |                                                                                                  |               | MIN      | TYP         | MAX | MIN       | TYP         | MAX |                              |
| $V_{IO}$ Input offset voltage                                                 | $V_O = 2.5\text{ V}$<br>$V_{IC} = 2.5\text{ V}$<br>$R_S = 50\ \Omega$                            | 25°C          | 225      | 1400        |     | 200       | 1000        |     | $\mu\text{V}$                |
|                                                                               |                                                                                                  | Full range    |          | 1700        |     |           | 1300        |     |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                                                  | Full range    | 1.7      |             |     | 1.7       |             |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                 |                                                                                                  | 25°C          | 8        | 100         |     | 8         | 100         |     | nA                           |
|                                                                               |                                                                                                  | Full range    |          | 150         |     |           | 150         |     |                              |
| $I_{IB}$ Input bias current                                                   |                                                                                                  | 25°C          | -0.8     | -2          |     | -0.8      | -2          |     | $\mu\text{A}$                |
|                                                                               |                                                                                                  | Full range    |          | -2.1        |     |           | -2.1        |     |                              |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50\ \Omega$                                                                               | 25°C          | 0 to 3   | -0.3 to 3.2 |     | 0 to 3    | -0.3 to 3.2 |     | V                            |
|                                                                               |                                                                                                  | Full range    | 0 to 2.9 |             |     | 0 to 2.9  |             |     |                              |
| $V_{OH}$ High-level output voltage                                            | $I_{OH} = -150\ \mu\text{A}$                                                                     | 25°C          | 3.9      | 4.1         |     | 3.9       | 4.1         |     | V                            |
|                                                                               |                                                                                                  | Full range    | 3.8      |             |     | 3.8       |             |     |                              |
|                                                                               | $I_{OH} = -1.5\text{ mA}$                                                                        | 25°C          | 3.8      | 4           |     | 3.8       | 4           |     |                              |
|                                                                               |                                                                                                  | Full range    | 3.7      |             |     | 3.7       |             |     |                              |
|                                                                               | $I_{OH} = -15\text{ mA}$                                                                         | 25°C          | 3.2      | 3.7         |     | 3.2       | 3.7         |     |                              |
|                                                                               |                                                                                                  | Full range    | 3.2      |             |     | 3.2       |             |     |                              |
| $V_{OL}$ Low-level output voltage                                             | $I_{OL} = 150\ \mu\text{A}$                                                                      | 25°C          |          | 75          | 125 |           | 75          | 125 | mV                           |
|                                                                               |                                                                                                  | Full range    |          |             | 150 |           |             | 150 |                              |
|                                                                               | $I_{OL} = 1.5\text{ mA}$                                                                         | 25°C          |          | 150         | 225 |           | 150         | 225 |                              |
|                                                                               |                                                                                                  | Full range    |          |             | 250 |           |             | 250 |                              |
|                                                                               | $I_{OL} = 15\text{ mA}$                                                                          | 25°C          |          | 1.2         | 1.6 |           | 1.2         | 1.6 | V                            |
|                                                                               |                                                                                                  | Full range    |          |             | 1.7 |           |             | 1.7 |                              |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_{CC} = \pm 2.5\text{ V}$ , $R_L = 2\text{ k}\Omega$ ,<br>$V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          | 50       | 220         |     | 50        | 220         |     | V/mV                         |
|                                                                               |                                                                                                  | Full range    | 25       |             |     | 25        |             |     |                              |
| $r_i$ Input resistance                                                        |                                                                                                  | 25°C          |          | 70          |     |           | 70          |     | M $\Omega$                   |
| $c_i$ Input capacitance                                                       |                                                                                                  | 25°C          |          | 2.5         |     |           | 2.5         |     | pF                           |
| $z_o$ Open-loop output impedance                                              | $f = 1\text{ MHz}$                                                                               | 25°C          |          | 30          |     |           | 30          |     | $\Omega$                     |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                                       | 25°C          | 85       | 118         |     | 85        | 118         |     | dB                           |
|                                                                               |                                                                                                  | Full range    | 80       |             |     | 80        |             |     |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$                       | 25°C          | 90       | 106         |     | 90        | 106         |     | dB                           |
|                                                                               |                                                                                                  | Full range    | 85       |             |     | 85        |             |     |                              |
| $I_{CC}$ Supply current                                                       | $V_O = 2.5\text{ V}$ , No load,<br>$V_{IC} = 2.5\text{ V}$                                       | 25°C          | 3.4      | 4.4         |     | 3.4       | 4.4         |     | mA                           |
|                                                                               |                                                                                                  | Full range    |          | 4.6         |     |           | 4.6         |     |                              |

$^\dagger$  Full range is 0°C to 70°C.



**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141C operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                            |          | TLE2141C |     |     | TLE2141AC |     |     | UNIT                   |
|--------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------|----------|-----|-----|-----------|-----|-----|------------------------|
|                    |                                             |                                                                                                                            |          | MIN      | TYP | MAX | MIN       | TYP | MAX |                        |
| SR +               | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}^\dagger$ ,<br>$R_L = 2\text{ k}\Omega^\dagger$ ,                                   |          | 45       |     |     | 45        |     |     | V/ $\mu\text{s}$       |
| SR –               | Negative slew rate                          |                                                                                                                            |          | 42       |     |     | 42        |     |     |                        |
| $t_s$              | Settling time                               | $A_{VD} = -1$ ,<br>2.5-V step                                                                                              | To 0.1%  | 0.16     |     |     | 0.16      |     |     | $\mu\text{s}$          |
|                    |                                             |                                                                                                                            | To 0.01% | 0.22     |     |     | 0.22      |     |     |                        |
| $V_n$              | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ ,<br>$f = 10\text{ Hz}$                                                                           |          | 15       |     |     | 15        |     |     | nV/ $\sqrt{\text{Hz}}$ |
|                    |                                             | $R_S = 20\text{ }\Omega$ ,<br>$f = 1\text{ kHz}$                                                                           |          | 10.5     |     |     | 10.5      |     |     |                        |
| $V_{N(\text{PP})}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                                         |          | 0.48     |     |     | 0.48      |     |     | $\mu\text{V}$          |
|                    |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                                        |          | 0.51     |     |     | 0.51      |     |     |                        |
| $I_n$              | Equivalent input noise current              | $f = 10\text{ Hz}$                                                                                                         |          | 1.92     |     |     | 1.92      |     |     | pA/ $\sqrt{\text{Hz}}$ |
|                    |                                             | $f = 1\text{ kHz}$                                                                                                         |          | 0.5      |     |     | 0.5       |     |     |                        |
| THD + N            | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }3\text{ V}$ ,<br>$A_{VD} = 2$ ,<br>$R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 10\text{ kHz}$          |          | 0.0052%  |     |     | 0.0052%   |     |     |                        |
| $B_1$              | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}^\dagger$                                                        |          | 5.9      |     |     | 5.9       |     |     | MHz                    |
|                    | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}^\dagger$ ,<br>$f = 100\text{ kHz}$                              |          | 5.8      |     |     | 5.8       |     |     | MHz                    |
| $B_{\text{OM}}$    | Maximum output-swing bandwidth              | $V_{O(\text{PP})} = 2\text{ V}$ ,<br>$A_{VD} = 1$ ,<br>$R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}^\dagger$ |          | 660      |     |     | 660       |     |     | kHz                    |
| $\phi_m$           | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}^\dagger$                                                        |          | 57°      |     |     | 57°       |     |     |                        |

<sup>†</sup>  $R_L$  and  $C_L$  terminated to 2.5 V.

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                 | $T_A^\dagger$ | TLE2141C        |               |                  | TLE2141AC   |               |     | UNIT             |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------|---------------|-----------------|---------------|------------------|-------------|---------------|-----|------------------|
|                                                                                 |                                                                 |               | MIN             | TYP           | MAX              | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0$ ,<br>$V_O = 0$<br>$R_S = 50\ \Omega$               | 25°C          | 200             | 900           |                  | 175         | 500           |     | $\mu V$          |
|                                                                                 |                                                                 | Full range    |                 | 1300          |                  |             | 800           |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                 | Full range    | 1.7             |               |                  | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                                 | 25°C          | 7               | 100           |                  | 7           | 100           |     | nA               |
|                                                                                 |                                                                 | Full range    |                 | 150           |                  |             | 150           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                                 | 25°C          | -0.7            | -1.5          |                  | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                                 | Full range    |                 | -1.6          |                  |             | -1.6          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                              | 25°C          | -15 to 13       | -15.3 to 13.2 |                  | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                                 | Full range    | -15 to 12.9     | -15.3 to 13.1 |                  | -15 to 12.9 | -15.3 to 13.1 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150\ \mu A$                                             | 25°C          | 13.8            | 14.1          |                  | 13.8        | 14.1          |     | V                |
|                                                                                 |                                                                 | Full range    | 13.7            |               |                  | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1.5\ mA$                                                | 25°C          | 13.7            | 14            |                  | 13.7        | 14            |     |                  |
|                                                                                 |                                                                 | Full range    | 13.6            |               |                  | 13.6        |               |     |                  |
|                                                                                 | $I_O = -15\ mA$                                                 | 25°C          | 13.1            | 13.7          |                  | 13.1        | 13.7          |     |                  |
|                                                                                 |                                                                 | Full range    | 13              |               |                  | 13          |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150\ \mu A$                                              | 25°C          | -14.7           | -14.9         |                  | -14.7       | -14.9         |     | V                |
|                                                                                 |                                                                 | Full range    | -14.6           |               |                  | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1.5\ mA$                                                 | 25°C          | -14.5           | -14.8         |                  | -14.5       | -14.8         |     |                  |
|                                                                                 |                                                                 | Full range    | -14.4           |               |                  | -14.4       |               |     |                  |
|                                                                                 | $I_O = 15\ mA$                                                  | 25°C          | -13.4           | -13.8         |                  | -13.4       | -13.8         |     |                  |
|                                                                                 |                                                                 | Full range    | -13.3           |               |                  | -13.3       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10\ V$                                               | 25°C          | 100             | 450           |                  | 100         | 450           |     | V/mV             |
|                                                                                 |                                                                 | Full range    | 75              |               |                  | 75          |               |     |                  |
| $r_i$ Input resistance                                                          | $R_L = 2\ k\Omega$                                              | 25°C          |                 | 65            |                  |             | 65            |     | $M\Omega$        |
| $c_i$ Input capacitance                                                         |                                                                 | 25°C          |                 | 2.5           |                  |             | 2.5           |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1\ MHz$                                                    | 25°C          |                 | 30            |                  |             | 30            |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                      | 25°C          | 85              | 108           |                  | 85          | 108           |     | dB               |
|                                                                                 |                                                                 | Full range    | 80              |               |                  | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\ V$ to $\pm 15\ V$ ,<br>$R_S = 50\ \Omega$ | 25°C          | 90              | 106           |                  | 90          | 106           |     | dB               |
|                                                                                 |                                                                 | Full range    | 85              |               |                  | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                       | 25°C          | $V_{ID} = 1\ V$ |               | $V_{ID} = -1\ V$ |             |               |     | mA               |
|                                                                                 |                                                                 |               | -25             | -50           | 20               | 31          | -25           | -50 |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0$ , No load                                             | 25°C          | 3.5             | 4.5           |                  | 3.5         | 4.5           |     | mA               |
|                                                                                 |                                                                 | Full range    |                 | 4.7           |                  |             | 4.7           |     |                  |

$^\dagger$  Full range is 0°C to 70°C.



**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141C operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                    |                                                     | TLE2141C |            |     | TLE2141AC |            |     | UNIT                   |
|-------------|---------------------------------------------|----------------------------------------------------|-----------------------------------------------------|----------|------------|-----|-----------|------------|-----|------------------------|
|             |                                             |                                                    |                                                     | MIN      | TYP        | MAX | MIN       | TYP        | MAX |                        |
| SR+         | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$           | $R_L = 2\text{ k}\Omega$                            | 27       | 45         |     | 27        | 45         |     | V/ $\mu\text{s}$       |
| SR–         | Negative slew rate                          |                                                    |                                                     | 27       | 42         |     | 27        | 42         |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>10-V step                       | To 0.1%                                             |          | 0.34       |     |           | 0.34       |     | $\mu\text{s}$          |
|             |                                             |                                                    | To 0.01%                                            |          | 0.4        |     |           | 0.4        |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$                           | $f = 10\text{ Hz}$                                  |          | 15         |     |           | 15         |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$                           | $f = 1\text{ kHz}$                                  |          | 10.5       |     |           | 10.5       |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                 |                                                     |          | 0.48       |     |           | 0.48       |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                |                                                     |          | 0.51       |     |           | 0.51       |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                 |                                                     |          | 1.89       |     |           | 1.89       |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                 |                                                     |          | 0.47       |     |           | 0.47       |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 10$       | $R_L = 2\text{ k}\Omega$ ,<br>$f = 10\text{ kHz}$   |          | 0.01%      |     |           | 0.01%      |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega$                           | $C_L = 100\text{ pF}$                               |          | 6          |     |           | 6          |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega$ ,<br>$f = 100\text{ kHz}$ | $C_L = 100\text{ pF}$                               |          | 5.9        |     |           | 5.9        |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 1$        | $R_L = 2\text{ k}\Omega$ ,<br>$C_L = 100\text{ pF}$ |          | 668        |     |           | 668        |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega$                           | $C_L = 100\text{ pF}$                               |          | $58^\circ$ |     |           | $58^\circ$ |     |                        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142C electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                                                  | $T_A^\dagger$ | TLE2142C |             |      | TLE2142AC |             |      | UNIT                         |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                                 |                                                                                                  |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                   | $V_O = 2.5\text{ V}$ , $R_S = 50\ \Omega$ ,<br>$V_{IC} = 2.5\text{ V}$                           | 25°C          |          | 220         | 1900 |           | 200         | 1500 | $\mu\text{V}$                |
|                                                                                 |                                                                                                  | Full range    |          |             | 2200 |           |             | 1800 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                                                  | Full range    |          | 1.7         |      |           | 1.7         |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                   |                                                                                                  | 25°C          |          | 8           | 100  |           | 8           | 100  | nA                           |
|                                                                                 |                                                                                                  | Full range    |          |             | 150  |           |             | 150  |                              |
| $I_{IB}$ Input bias current                                                     |                                                                                                  | 25°C          |          | -0.8        | -2   |           | -0.8        | -2   | $\mu\text{A}$                |
|                                                                                 |                                                                                                  | Full range    |          |             | -2.1 |           |             | -2.1 |                              |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                               | 25°C          | 0 to 3   | -0.3 to 3.2 |      | 0 to 3    | -0.3 to 3.2 |      | V                            |
|                                                                                 |                                                                                                  | Full range    | 0 to 2.9 |             |      | 0 to 2.9  |             |      |                              |
| $V_{OH}$ High-level output voltage                                              | $I_{OH} = -150\ \mu\text{A}$                                                                     | 25°C          |          | 3.9         | 4.1  |           | 3.9         | 4.1  | V                            |
|                                                                                 |                                                                                                  | Full range    |          | 3.8         |      |           | 3.8         |      |                              |
|                                                                                 | $I_{OH} = -1.5\text{ mA}$                                                                        | 25°C          |          | 3.8         | 4    |           | 3.8         | 4    |                              |
|                                                                                 |                                                                                                  | Full range    |          | 3.7         |      |           | 3.7         |      |                              |
|                                                                                 | $I_{OH} = -15\text{ mA}$                                                                         | 25°C          |          | 3.4         | 3.7  |           | 3.4         | 3.7  |                              |
|                                                                                 |                                                                                                  | Full range    |          | 3.4         |      |           | 3.4         |      |                              |
| $V_{OL}$ Low-level output voltage                                               | $I_{OL} = 150\ \mu\text{A}$                                                                      | 25°C          |          | 75          | 125  |           | 75          | 125  | mV                           |
|                                                                                 |                                                                                                  | Full range    |          |             | 150  |           |             | 150  |                              |
|                                                                                 | $I_{OL} = 1.5\text{ mA}$                                                                         | 25°C          |          | 150         | 225  |           | 150         | 225  |                              |
|                                                                                 |                                                                                                  | Full range    |          |             | 250  |           |             | 250  |                              |
|                                                                                 | $I_{OL} = 15\text{ mA}$                                                                          | 25°C          |          | 1.2         | 1.4  |           | 1.2         | 1.4  | V                            |
|                                                                                 |                                                                                                  | Full range    |          |             | 1.5  |           |             | 1.5  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_{CC} = \pm 2.5\text{ V}$ , $R_L = 2\text{ k}\Omega$ ,<br>$V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          |          | 50          | 220  |           | 50          | 220  | V/mV                         |
|                                                                                 |                                                                                                  | Full range    |          | 25          |      |           | 25          |      |                              |
| $r_i$ Input resistance                                                          |                                                                                                  | 25°C          |          | 70          |      |           | 70          |      | $\text{M}\Omega$             |
| $c_i$ Input capacitance                                                         |                                                                                                  | 25°C          |          | 2.5         |      |           | 2.5         |      | pF                           |
| $z_o$ Open-loop output impedance                                                | $f = 1\text{ MHz}$                                                                               | 25°C          |          | 30          |      |           | 30          |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                                       | 25°C          |          | 85          | 118  |           | 85          | 118  | dB                           |
|                                                                                 |                                                                                                  | Full range    |          | 80          |      |           | 80          |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$                       | 25°C          |          | 90          | 106  |           | 90          | 106  | dB                           |
|                                                                                 |                                                                                                  | Full range    |          | 85          |      |           | 85          |      |                              |
| $I_{CC}$ Supply current                                                         | $V_O = 2.5\text{ V}$ , No load,<br>$V_{IC} = 2.5\text{ V}$                                       | 25°C          |          | 6.6         | 8.8  |           | 6.6         | 8.8  | mA                           |
|                                                                                 |                                                                                                  | Full range    |          |             | 9.2  |           |             | 9.2  |                              |

$^\dagger$  Full range is 0°C to 70°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142C operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                |                                                             | TLE2142C |     |     | TLE2142AC |     |     | UNIT                   |
|-------------|---------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------|----------|-----|-----|-----------|-----|-----|------------------------|
|             |                                             |                                                                                |                                                             | MIN      | TYP | MAX | MIN       | TYP | MAX |                        |
| SR +        | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$<br>$R_L = 2\text{ k}\Omega^\dagger$ , |                                                             | 45       |     |     | 45        |     |     | V/ $\mu\text{s}$       |
| SR –        | Negative slew rate                          |                                                                                |                                                             | 42       |     |     | 42        |     |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>2.5-V step                                                  | To 0.1%                                                     | 0.16     |     |     | 0.16      |     |     | $\mu\text{s}$          |
|             |                                             |                                                                                | To 0.01%                                                    | 0.22     |     |     | 0.22      |     |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ , $f = 10\text{ Hz}$                                  |                                                             | 15       |     |     | 15        |     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ , $f = 1\text{ kHz}$                                  |                                                             | 10.5     |     |     | 10.5      |     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                             |                                                             | 0.48     |     |     | 0.48      |     |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                            |                                                             | 0.51     |     |     | 0.51      |     |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                             |                                                             | 1.92     |     |     | 1.92      |     |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                             |                                                             | 0.5      |     |     | 0.5       |     |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }3\text{ V}$ ,<br>$A_{VD} = 2$ ,                           | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 10\text{ kHz}$   | 0.0052%  |     |     | 0.0052%   |     |     |                        |
| B1          | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega^\dagger$ ,                                             | $C_L = 100\text{ pF}$                                       | 5.9      |     |     | 5.9       |     |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 100\text{ kHz}$                     | $C_L = 100\text{ pF}$ ,                                     | 5.8      |     |     | 5.8       |     |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}$ ,<br>$A_{VD} = 1$ ,                                   | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}$ | 660      |     |     | 660       |     |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega^\dagger$ ,                                             | $C_L = 100\text{ pF}$                                       | 57°      |     |     | 57°       |     |     |                        |

<sup>†</sup>  $R_L$  terminates at 2.5 V.

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$ | TLE2142C       |               |                 | TLE2142AC   |               |     | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|---------------|----------------|---------------|-----------------|-------------|---------------|-----|------------------|
|                                                                                 |                                                          |               | MIN            | TYP           | MAX             | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                   | 25°C          | 290            | 1200          |                 | 275         | 750           |     | $\mu V$          |
|                                                                                 |                                                          | Full range    |                | 1600          |                 |             | 1200          |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | Full range    | 1.7            |               |                 | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C          | 7              | 100           |                 | 7           | 100           |     | nA               |
|                                                                                 |                                                          | Full range    |                | 150           |                 |             | 150           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C          | -0.7           | -1.5          |                 | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                          | Full range    |                | -1.6          |                 |             | -1.6          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                        | 25°C          | -15 to 13      | -15.3 to 13.2 |                 | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                          | Full range    | -15 to 12.9    | -15.3 to 13.1 |                 | -15 to 12.9 | -15.3 to 13.1 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                       | 25°C          | 13.8           | 14.1          |                 | 13.8        | 14.1          |     | V                |
|                                                                                 |                                                          | Full range    | 13.7           |               |                 | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1.5$ mA                                          | 25°C          | 13.7           | 14            |                 | 13.7        | 14            |     |                  |
|                                                                                 |                                                          | Full range    | 13.6           |               |                 | 13.6        |               |     |                  |
|                                                                                 | $I_O = -15$ mA                                           | 25°C          | 13.3           | 13.7          |                 | 13.3        | 13.7          |     |                  |
|                                                                                 |                                                          | Full range    | 13.2           |               |                 | 13.2        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                        | 25°C          | -14.7          | -14.9         |                 | -14.7       | -14.9         |     | V                |
|                                                                                 |                                                          | Full range    | -14.6          |               |                 | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1.5$ mA                                           | 25°C          | -14.5          | -14.8         |                 | -14.5       | -14.8         |     |                  |
|                                                                                 |                                                          | Full range    | -14.4          |               |                 | -14.4       |               |     |                  |
|                                                                                 | $I_O = 15$ mA                                            | 25°C          | -13.4          | -13.8         |                 | -13.4       | -13.8         |     |                  |
|                                                                                 |                                                          | Full range    | -13.3          |               |                 | -13.3       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10$ V                                         | 25°C          | 100            | 450           |                 | 100         | 450           |     | V/mV             |
|                                                                                 |                                                          | Full range    | 75             |               |                 | 75          |               |     |                  |
| $r_i$ Input resistance                                                          | $R_L = 2$ k $\Omega$                                     | 25°C          |                | 65            |                 |             | 65            |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                          | 25°C          |                | 2.5           |                 |             | 2.5           |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                              | 25°C          |                | 30            |                 |             | 30            |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                   | 25°C          | 85             | 108           |                 | 85          | 108           |     | dB               |
|                                                                                 |                                                          | Full range    | 80             |               |                 | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C          | 90             | 106           |                 | 90          | 106           |     | dB               |
|                                                                                 |                                                          | Full range    | 85             |               |                 | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                | 25°C          | $V_{ID} = 1$ V |               | $V_{ID} = -1$ V |             |               |     | mA               |
|                                                                                 |                                                          |               | -25            | -50           | 20              | 31          | -25           | -50 |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0, \text{ No load}$                               | 25°C          | 6.9            | 9             |                 | 6.9         | 9             |     | mA               |
|                                                                                 |                                                          | Full range    |                | 9.4           |                 |             | 9.4           |     |                  |

$^\dagger$  Full range is 0°C to 70°C.



**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142C operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER |                                             | TEST CONDITIONS                                   |          | TLE2142C |     |     | TLE2142AC |     |      | UNIT   |
|-----------|---------------------------------------------|---------------------------------------------------|----------|----------|-----|-----|-----------|-----|------|--------|
|           |                                             |                                                   |          | MIN      | TYP | MAX | MIN       | TYP | MAX  |        |
| SR +      | Positive slew rate                          | AVD = −1, RL = 2 kΩ,<br>CL = 500 pF               |          | 27       | 45  |     | 27        | 45  | V/μs |        |
| SR −      | Negative slew rate                          |                                                   |          | 27       | 42  |     | 27        | 42  |      |        |
| ts        | Settling time                               | AVD = −1,<br>10-V step                            | To 0.1%  | 0.34     |     |     | 0.34      |     |      | μs     |
|           |                                             |                                                   | To 0.01% | 0.4      |     |     | 0.4       |     |      |        |
| Vn        | Equivalent input noise voltage              | RS = 20 Ω, f = 10 Hz                              |          | 15       |     |     | 15        |     |      | nV/√Hz |
|           |                                             | RS = 20 Ω, f = 1 kHz                              |          | 10.5     |     |     | 10.5      |     |      |        |
| VN(PP)    | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                |          | 0.48     |     |     | 0.48      |     |      | μV     |
|           |                                             | f = 0.1 Hz to 10 Hz                               |          | 0.51     |     |     | 0.51      |     |      |        |
| In        | Equivalent input noise current              | f = 10 Hz                                         |          | 1.89     |     |     | 1.89      |     |      | pA/√Hz |
|           |                                             | f = 1 kHz                                         |          | 0.47     |     |     | 0.47      |     |      |        |
| THD + N   | Total harmonic distortion plus noise        | VO(PP) = 20 V, RL = 2 kΩ,<br>AVD = 10, f = 10 kHz |          | 0.01%    |     |     | 0.01%     |     |      |        |
| B1        | Unity-gain bandwidth                        | RL = 2 kΩ, CL = 100 pF                            |          | 6        |     |     | 6         |     |      | MHz    |
|           | Gain-bandwidth product                      | RL = 2 kΩ,, f =100 kHz                            |          | 5.9      |     |     | 5.9       |     |      | MHz    |
| BOM       | Maximum output-swing bandwidth              | VO(PP) = 20 V, RL = 2 kΩ,<br>AVD = 1, CL = 100 pF |          | 668      |     |     | 668       |     |      | kHz    |
| φm        | Phase margin at unity gain                  | RL = 2 kΩ, CL = 100 pF                            |          | 58°      |     |     | 58°       |     |      |        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144C electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                    | TEST CONDITIONS                                                                                | $T_A^\dagger$ | TLE2144C |             |      | TLE2144AC |             |      | UNIT                         |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                              |                                                                                                |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$ $R_S = 50\ \Omega$                           | 25°C          | 0.5      | 3.8         |      | 0.5       | 3           |      | mV                           |
|                                                                              |                                                                                                | Full range    |          |             | 4.4  |           |             | 3.6  |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage               |                                                                                                | Full range    |          | 1.7         |      |           | 1.7         |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                |                                                                                                | 25°C          | 8        | 100         |      | 8         | 100         |      | nA                           |
|                                                                              |                                                                                                | Full range    |          | 150         |      |           | 150         |      |                              |
| $I_{IB}$ Input bias current                                                  |                                                                                                | 25°C          | -0.8     | -2          |      | -0.8      | -2          |      | $\mu\text{A}$                |
|                                                                              |                                                                                                | Full range    |          | -2.1        |      |           | -2.1        |      |                              |
| $V_{ICR}$ Common-mode input voltage range                                    | $R_S = 50\ \Omega$                                                                             | 25°C          | 0 to 3   | -0.3 to 3.2 |      | 0 to 3    | -0.3 to 3.2 |      | V                            |
|                                                                              |                                                                                                | Full range    | 0 to 2.9 |             |      | 0 to 2.9  |             |      |                              |
| $V_{OH}$ High-level output voltage                                           | $I_{OH} = -150\ \mu\text{A}$                                                                   | 25°C          | 3.9      | 4.1         |      | 3.9       | 4.1         |      | V                            |
|                                                                              |                                                                                                | Full range    | 3.8      |             |      | 3.8       |             |      |                              |
|                                                                              | $I_{OH} = -1.5\text{ mA}$                                                                      | 25°C          | 3.8      | 4           |      | 3.8       | 4           |      |                              |
|                                                                              |                                                                                                | Full range    | 3.7      |             |      | 3.7       |             |      |                              |
|                                                                              | $I_{OH} = -15\text{ mA}$                                                                       | 25°C          | 3.4      | 3.7         |      | 3.4       | 3.7         |      |                              |
|                                                                              |                                                                                                | Full range    | 3.4      |             |      | 3.4       |             |      |                              |
| $V_{OL}$ Low-level output voltage                                            | $I_{OL} = 150\ \mu\text{A}$                                                                    | 25°C          |          | 75          | 125  |           | 75          | 125  | mV                           |
|                                                                              |                                                                                                | Full range    |          |             | 150  |           |             | 150  |                              |
|                                                                              | $I_{OL} = 1.5\text{ mA}$                                                                       | 25°C          |          | 150         | 225  |           | 150         | 225  |                              |
|                                                                              |                                                                                                | Full range    |          |             | 250  |           |             | 250  |                              |
|                                                                              | $I_{OL} = 15\text{ mA}$                                                                        | 25°C          |          | 1.2         | 1.6  |           | 1.2         | 1.6  | V                            |
|                                                                              |                                                                                                | Full range    |          |             | 1.7  |           |             | 1.7  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                     | $V_{CC} = \pm 2.5\text{ V}$ ,<br>$V_O = 1\text{ V to } -1.5\text{ V}$ $R_L = 2\text{ k}\Omega$ | 25°C          | 50       | 95          |      | 50        | 95          |      | V/mV                         |
|                                                                              |                                                                                                | Full range    | 25       |             |      | 25        |             |      |                              |
| $r_i$ Input resistance                                                       |                                                                                                | 25°C          |          | 70          |      |           | 70          |      | M $\Omega$                   |
| $c_i$ Input capacitance                                                      |                                                                                                | 25°C          |          | 2.5         |      |           | 2.5         |      | pF                           |
| $z_o$ Open-loop output impedance                                             | $f = 1\text{ MHz}$                                                                             | 25°C          |          | 30          |      |           | 30          |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                             | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                                     | 25°C          | 85       | 118         |      | 85        | 118         |      | dB                           |
|                                                                              |                                                                                                | Full range    | 80       |             |      | 80        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC} / \Delta V_{IO}$ ) | $V_{CC} = \pm 2.5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$                        | 25°C          | 90       | 106         |      | 90        | 106         |      | dB                           |
|                                                                              |                                                                                                | Full range    | 85       |             |      | 85        |             |      |                              |
| $I_{CC}$ Supply current                                                      | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$ No load,                                     | 25°C          |          | 13.2        | 17.6 |           | 13.2        | 17.6 | mA                           |
|                                                                              |                                                                                                | Full range    |          |             | 18.5 |           |             | 18.5 |                              |

$^\dagger$  Full range is 0°C to 70°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144C operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                |                                                             | TLE2144C |     |     | TLE2144AC |     |     | UNIT                   |
|-------------|---------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------|----------|-----|-----|-----------|-----|-----|------------------------|
|             |                                             |                                                                                |                                                             | MIN      | TYP | MAX | MIN       | TYP | MAX |                        |
| SR +        | Positive slew rate                          | $A_{VD} = -1$ ,<br>$R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 500\text{ pF}$ |                                                             | 45       |     |     | 45        |     |     | V/ $\mu\text{s}$       |
| SR –        | Negative slew rate                          |                                                                                |                                                             | 42       |     |     | 42        |     |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>2.5-V step                                                  | To 0.1%                                                     | 0.16     |     |     | 0.16      |     |     | $\mu\text{s}$          |
|             |                                             |                                                                                | To 0.01%                                                    | 0.22     |     |     | 0.22      |     |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ ,<br>$f = 10\text{ Hz}$                               |                                                             | 15       |     |     | 15        |     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ ,<br>$f = 1\text{ kHz}$                               |                                                             | 10.5     |     |     | 10.5      |     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                             |                                                             | 0.48     |     |     | 0.48      |     |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                            |                                                             | 0.51     |     |     | 0.51      |     |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                             |                                                             | 1.92     |     |     | 1.92      |     |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                             |                                                             | 0.5      |     |     | 0.5       |     |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }3\text{ V}$ ,<br>$A_{VD} = 2$ ,                           | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 10\text{ kHz}$   | 0.0052%  |     |     | 0.0052%   |     |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega^\dagger$ ,                                             | $C_L = 100\text{ pF}$                                       | 5.9      |     |     | 5.9       |     |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 100\text{ kHz}$                     | $C_L = 100\text{ pF}$                                       | 5.8      |     |     | 5.8       |     |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}$ ,<br>$A_{VD} = 1$ ,                                   | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}$ | 660      |     |     | 660       |     |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega^\dagger$ ,                                             | $C_L = 100\text{ pF}$                                       | 57°      |     |     | 57°       |     |     |                        |

$^\dagger R_L$  terminates at 2.5 V

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                 | $T_A^\dagger$ | TLE2144C    |               |     | TLE2144AC   |               |     | UNIT             |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                                 |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0$ ,<br>$V_O = 0$<br>$R_S = 50\ \Omega$               | 25°C          | 0.6         | 2.4           |     | 0.5         | 1.5           |     | mV               |
|                                                                                 |                                                                 | Full range    |             | 3.2           |     |             | 2.4           |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                 | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                                 | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                                 | Full range    |             | 150           |     |             | 150           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                                 | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                                 | Full range    |             | -1.6          |     |             | -1.6          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                              | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                                 | Full range    | -15 to 12.9 | -15.3 to 13.1 |     | -15 to 12.9 | -15 to 13.1   |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150\ \mu A$                                             | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 |                                                                 | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1.5\ mA$                                                | 25°C          | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 |                                                                 | Full range    | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -15\ mA$                                                 | 25°C          | 13.1        | 13.7          |     | 13.1        | 13.7          |     |                  |
|                                                                                 |                                                                 | Full range    | 13          |               |     | 13          |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150\ \mu A$                                              | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 |                                                                 | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1.5\ mA$                                                 | 25°C          | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 |                                                                 | Full range    | -14.4       |               |     | -14.4       |               |     |                  |
|                                                                                 | $I_O = 15\ mA$                                                  | 25°C          | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 |                                                                 | Full range    | -13.3       |               |     | -13.3       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10\ V$                                               | 25°C          | 100         | 170           |     | 100         | 170           |     | V/mV             |
|                                                                                 |                                                                 | Full range    | 75          |               |     | 75          |               |     |                  |
| $r_i$ Input resistance                                                          | $R_L = 2\ k\Omega$                                              | 25°C          |             | 65            |     |             | 65            |     | $M\Omega$        |
| $c_i$ Input capacitance                                                         |                                                                 | 25°C          |             | 2.5           |     |             | 2.5           |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1\ MHz$                                                    | 25°C          |             | 30            |     |             | 30            |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                      | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 |                                                                 | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\ V$ to $\pm 15\ V$ ,<br>$R_S = 50\ \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                                 | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                       | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                                 |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0$ , No load                                             | 25°C          | 13.8        | 18            |     | 13.8        | 18            |     | mA               |
|                                                                                 |                                                                 | Full range    |             | 18.8          |     |             | 18.8          |     |                  |

$^\dagger$  Full range is 0°C to 70°C.



**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144C operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                         |                                                | TLE2144C |     |     | TLE2144AC |     |      | UNIT   |
|--------------------|---------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------|----------|-----|-----|-----------|-----|------|--------|
|                    |                                             |                                                                         |                                                | MIN      | TYP | MAX | MIN       | TYP | MAX  |        |
| SR +               | Positive slew rate                          | A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 500 pF |                                                | 27       | 45  |     | 27        | 45  | V/μs |        |
| SR −               | Negative slew rate                          |                                                                         |                                                | 27       | 42  |     | 27        | 42  |      |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step                                      | To 0.1%                                        | 0.34     |     |     | 0.34      |     |      | μs     |
|                    |                                             |                                                                         | To 0.01%                                       | 0.4      |     |     | 0.4       |     |      |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, f = 10 Hz                                        |                                                | 15       |     |     | 15        |     |      | nV/√Hz |
|                    |                                             | R <sub>S</sub> = 20 Ω, f = 1 kHz                                        |                                                | 10.5     |     |     | 10.5      |     |      |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                      |                                                | 0.48     |     |     | 0.48      |     |      | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                     |                                                | 0.51     |     |     | 0.51      |     |      |        |
| I <sub>n</sub>     | Equivalent input noise current              | f = 10 Hz                                                               |                                                | 1.89     |     |     | 1.89      |     |      | pA/√Hz |
|                    |                                             | f = 1 kHz                                                               |                                                | 0.47     |     |     | 0.47      |     |      |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10,                        | R <sub>L</sub> = 2 kΩ, f = 10 kHz              | 0.01%    |     |     | 0.01%     |     |      |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | R <sub>L</sub> = 2 kΩ,                                                  | C <sub>L</sub> = 100 pF                        | 6        |     |     | 6         |     |      | MHz    |
|                    | Gain-bandwidth product                      | R <sub>L</sub> = 2 kΩ, f = 100 kHz                                      | C <sub>L</sub> = 100 pF,                       | 5.9      |     |     | 5.9       |     |      | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 1,                         | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF | 668      |     |     | 668       |     |      | kHz    |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 2 kΩ,                                                  | C <sub>L</sub> = 100 pF                        | 58°      |     |     | 58°       |     |      |        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141I electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                                                  | $T_A^\dagger$ | TLE2141I |             |      | TLE2141AI |             |      | UNIT                         |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                                 |                                                                                                  |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                   | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$<br>$R_S = 50\ \Omega$                          | 25°C          | 225      | 1400        |      | 200       | 1000        |      | $\mu\text{V}$                |
|                                                                                 |                                                                                                  | Full range    |          |             | 1900 |           |             | 1500 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                                                  | Full range    | 1.7      |             |      | 1.7       |             |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                   |                                                                                                  | 25°C          | 8        | 100         |      | 8         | 100         |      | nA                           |
|                                                                                 |                                                                                                  | Full range    |          |             | 200  |           |             | 200  |                              |
| $I_{IB}$ Input bias current                                                     |                                                                                                  | 25°C          | -0.8     | -2          |      | -0.8      | -2          |      | $\mu\text{A}$                |
|                                                                                 |                                                                                                  | Full range    |          |             | -2.2 |           |             | -2.2 |                              |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                               | 25°C          | 0 to 3   | -0.3 to 3.2 |      | 0 to 3    | -0.3 to 3.2 |      | V                            |
|                                                                                 |                                                                                                  | Full range    | 0 to 2.7 | -0.3 to 2.9 |      | 0 to 2.7  | -0.3 to 2.9 |      |                              |
| $V_{OH}$ High-level output voltage                                              | $I_{OH} = -150\ \mu\text{A}$                                                                     | 25°C          | 3.9      | 4.1         |      | 3.9       | 4.1         |      | V                            |
|                                                                                 | $I_{OH} = -1.5\text{ mA}$                                                                        |               | 3.8      | 4           |      | 3.8       | 4           |      |                              |
|                                                                                 | $I_{OH} = -15\text{ mA}$                                                                         |               | 3.2      | 3.7         |      | 3.2       | 3.7         |      |                              |
|                                                                                 | $I_{OH} = -100\ \mu\text{A}$                                                                     | Full range    | 3.8      |             |      | 3.8       |             |      |                              |
|                                                                                 | $I_{OH} = -1\text{ mA}$                                                                          |               | 3.7      |             |      | 3.7       |             |      |                              |
|                                                                                 | $I_{OH} = -10\text{ mA}$                                                                         |               | 3.3      |             |      | 3.3       |             |      |                              |
| $V_{OL}$ Low-level output voltage                                               | $I_{OL} = 150\ \mu\text{A}$                                                                      | 25°C          | 75       | 125         |      | 75        | 125         |      | mV                           |
|                                                                                 | $I_{OL} = 1.5\ \mu\text{A}$                                                                      |               | 150      | 225         |      | 150       | 225         |      |                              |
|                                                                                 | $I_{OL} = 15\text{ mA}$                                                                          |               | 1.2      | 1.6         |      | 1.2       | 1.6         |      | V                            |
|                                                                                 | $I_{OL} = 100\ \mu\text{A}$                                                                      | Full range    | 175      |             |      | 175       |             |      | mV                           |
|                                                                                 | $I_{OL} = 1\text{ mA}$                                                                           |               | 225      |             |      | 225       |             |      |                              |
|                                                                                 | $I_{OL} = 10\text{ mA}$                                                                          |               | 1.4      |             |      | 1.4       |             |      | V                            |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_{CC} = \pm 2.5\text{ V}$ , $R_L = 2\text{ k}\Omega$ ,<br>$V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          | 50       | 220         |      | 50        | 220         |      | V/mV                         |
|                                                                                 |                                                                                                  | Full range    | 10       |             |      | 10        |             |      |                              |
| $r_i$ Input resistance                                                          |                                                                                                  | 25°C          | 70       |             |      | 70        |             |      | $\text{M}\Omega$             |
| $c_i$ Input capacitance                                                         |                                                                                                  | 25°C          | 2.5      |             |      | 2.5       |             |      | pF                           |
| $z_o$ Open-loop output impedance                                                | $f = 1\text{ MHz}$                                                                               | 25°C          | 30       |             |      | 30        |             |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                                       | 25°C          | 85       | 118         |      | 85        | 118         |      | dB                           |
|                                                                                 |                                                                                                  | Full range    | 80       |             |      | 80        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$                       | 25°C          | 90       | 106         |      | 90        | 106         |      | dB                           |
|                                                                                 |                                                                                                  | Full range    | 85       |             |      | 85        |             |      |                              |
| $I_{CC}$ Supply current                                                         | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$ No load,                                       | 25°C          | 3.4      | 4.4         |      | 3.4       | 4.4         |      | mA                           |
|                                                                                 |                                                                                                  | Full range    |          |             | 4.6  |           |             | 4.6  |                              |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $105^\circ\text{C}$ .

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141I operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                               |          | TLE2141I |     |     | TLE2141AI |     |     | UNIT                   |
|-------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------|----------|-----|-----|-----------|-----|-----|------------------------|
|             |                                             |                                                                                                               |          | MIN      | TYP | MAX | MIN       | TYP | MAX |                        |
| SR +        | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$<br>$R_L = 2\text{ k}\Omega^\dagger$ ,                                |          | 45       |     |     | 45        |     |     | V/ $\mu\text{s}$       |
| SR –        | Negative slew rate                          |                                                                                                               |          | 42       |     |     | 42        |     |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>2.5-V step                                                                                 | To 0.1%  | 0.16     |     |     | 0.16      |     |     | $\mu\text{s}$          |
|             |                                             |                                                                                                               | To 0.01% | 0.22     |     |     | 0.22      |     |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ , $f = 10\text{ Hz}$                                                                 |          | 15       |     |     | 15        |     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ , $f = 1\text{ kHz}$                                                                 |          | 10.5     |     |     | 10.5      |     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                            |          | 0.48     |     |     | 0.48      |     |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                           |          | 0.51     |     |     | 0.51      |     |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                                                            |          | 1.92     |     |     | 1.92      |     |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                            |          | 0.5      |     |     | 0.5       |     |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }3\text{ V}$ , $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$A_{VD} = 2$ , $f = 10\text{ kHz}$   |          | 0.0052%  |     |     | 0.0052%   |     |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega^\dagger$ , $C_L = 100\text{ pF}^\dagger$                                              |          | 5.9      |     |     | 5.9       |     |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega^\dagger$<br>$f = 100\text{ kHz}$                                                      |          | 5.8      |     |     | 5.8       |     |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}$ , $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$A_{VD} = 1$ , $C_L = 100\text{ pF}^\dagger$ |          | 660      |     |     | 660       |     |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega^\dagger$ , $C_L = 100\text{ pF}^\dagger$                                              |          | 57°      |     |     | 57°       |     |     |                        |

$^\dagger R_L$  and  $C_L$  terminated to 2.5 V.

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$ | TLE2141I    |               |     | TLE2141AI   |               |     | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                          |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, R_S = 50 \Omega, V_O = 0$                   | 25°C          | 200         | 900           |     | 175         | 500           |     | $\mu V$          |
|                                                                                 |                                                          | Full range    |             | 1500          |     |             | 1000          |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                          | Full range    |             | 200           |     |             | 200           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                          | Full range    |             | -1.7          |     |             | -1.7          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                        | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                          | Full range    | -15 to 12.7 | -15.3 to 12.9 |     | -15 to 12.7 | -15.3 to 12.9 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                       | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 | $I_O = -1.5$ mA                                          |               | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 | $I_O = -15$ mA                                           |               | 13.1        | 13.7          |     | 13.1        | 13.7          |     |                  |
|                                                                                 | $I_O = -100 \mu A$                                       | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1$ mA                                            |               | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -10$ mA                                           |               | 13.1        |               |     | 13.1        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                        | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 | $I_O = 1.5$ mA                                           |               | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 | $I_O = 15$ mA                                            |               | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 | $I_O = 100 \mu A$                                        | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1$ mA                                             |               | -14.5       |               |     | -14.5       |               |     |                  |
|                                                                                 | $I_O = 10$ mA                                            |               | -13.4       |               |     | -13.4       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10$ V, $R_L = 2$ k $\Omega$                   | 25°C          | 100         | 450           |     | 100         | 450           |     | V/mV             |
|                                                                                 |                                                          | Full range    | 40          |               |     | 40          |               |     |                  |
| $r_i$ Input resistance                                                          |                                                          | 25°C          | 65          |               |     | 65          |               |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                          | 25°C          | 2.5         |               |     | 2.5         |               |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                              | 25°C          | 30          |               |     | 30          |               |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                   | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 |                                                          | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                          | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                          |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0$ , No load                                      | 25°C          | 3.5         | 4.5           |     | 3.5         | 4.5           |     | mA               |
|                                                                                 |                                                          | Full range    |             | 4.7           |     |             | 4.7           |     |                  |

$^\dagger$  Full range is -40°C to 105°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141I operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                      |                          | TLE2141I |       |     | TLE2141AI |       |     | UNIT                   |
|-------------|---------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------|----------|-------|-----|-----------|-------|-----|------------------------|
|             |                                             |                                                                                                      |                          | MIN      | TYP   | MAX | MIN       | TYP   | MAX |                        |
| SR+         | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$                                                             | $R_L = 2\text{ k}\Omega$ | 27       | 45    |     | 27        | 45    |     | V/ $\mu\text{s}$       |
| SR–         | Negative slew rate                          |                                                                                                      |                          | 27       | 42    |     | 27        | 42    |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>10-V step                                                                         | To 0.1%                  |          | 0.34  |     |           | 0.34  |     | $\mu\text{s}$          |
|             |                                             |                                                                                                      | To 0.01%                 |          | 0.4   |     |           | 0.4   |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$                                                                             | $f = 10\text{ Hz}$       |          | 15    |     |           | 15    |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$                                                                             | $f = 1\text{ kHz}$       |          | 10.5  |     |           | 10.5  |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                   |                          |          | 0.48  |     |           | 0.48  |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                  |                          |          | 0.51  |     |           | 0.51  |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                                                   |                          |          | 1.89  |     |           | 1.89  |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                   |                          |          | 0.47  |     |           | 0.47  |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 10$ ,<br>$R_L = 2\text{ k}\Omega$ ,<br>$f = 10\text{ kHz}$  |                          |          | 0.01% |     |           | 0.01% |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega$                                                                             | $C_L = 100\text{ pF}$    |          | 6     |     |           | 6     |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega$ ,<br>$f = 100\text{ kHz}$                                                   | $C_L = 100\text{ pF}$    |          | 5.9   |     |           | 5.9   |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 1$ ,<br>$R_L = 2\text{ k}\Omega$ ,<br>$C_L = 100\text{ pF}$ |                          |          | 668   |     |           | 668   |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega$                                                                             | $C_L = 100\text{ pF}$    |          | 58°   |     |           | 58°   |     |                        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142I electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                                         | $T_A^\dagger$ | TLE2142I |             |      | TLE2142AI |             |      | UNIT                         |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                                 |                                                                                         |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                   | $V_O = 2.5\text{ V}, R_S = 50\ \Omega, V_{IC} = 2.5\text{ V}$                           | 25°C          | 220      | 1900        |      | 220       | 1500        |      | $\mu\text{V}$                |
|                                                                                 |                                                                                         | Full range    |          |             | 2400 |           |             | 2000 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                                         | Full range    | 1.7      |             |      | 1.7       |             |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                   |                                                                                         | 25°C          | 8        | 100         |      | 8         | 100         |      | nA                           |
|                                                                                 |                                                                                         | Full range    |          |             | 200  |           |             | 200  |                              |
| $I_{IB}$ Input bias current                                                     |                                                                                         | 25°C          | -0.8     | -2          |      | -0.8      | -2          |      | $\mu\text{A}$                |
|                                                                                 |                                                                                         | Full range    |          |             | -2.2 |           |             | -2.2 |                              |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                      | 25°C          | 0 to 3   | -0.3 to 3.2 |      | 0 to 3    | -0.3 to 3.2 |      | V                            |
|                                                                                 |                                                                                         | Full range    | 0 to 2.7 | -0.3 to 2.9 |      | 0 to 2.7  | -0.3 to 2.9 |      |                              |
| $V_{OH}$ High-level output voltage                                              | $I_{OH} = -150\ \mu\text{A}$                                                            | 25°C          | 3.9      | 4.1         |      | 3.9       | 4.1         |      | V                            |
|                                                                                 | $I_{OH} = -1.5\text{ mA}$                                                               |               | 3.8      | 4           |      | 3.8       | 4           |      |                              |
|                                                                                 | $I_{OH} = -15\text{ mA}$                                                                |               | 3.4      | 3.7         |      | 3.4       | 3.7         |      |                              |
|                                                                                 | $I_{OH} = 100\ \mu\text{A}$                                                             | Full range    | 3.8      |             |      | 3.8       |             |      |                              |
|                                                                                 | $I_{OH} = 1\text{ mA}$                                                                  |               | 3.7      |             |      | 3.7       |             |      |                              |
|                                                                                 | $I_{OH} = 10\text{ mA}$                                                                 |               | 3.5      |             |      | 3.5       |             |      |                              |
| $V_{OL}$ Low-level output voltage                                               | $I_{OL} = 150\ \mu\text{A}$                                                             | 25°C          | 75       | 125         |      | 75        | 125         |      | mV                           |
|                                                                                 | $I_{OL} = 1.5\text{ mA}$                                                                |               | 150      | 225         |      | 150       | 225         |      |                              |
|                                                                                 | $I_{OL} = 15\text{ mA}$                                                                 |               | 1.2      | 1.4         |      | 1.2       | 1.4         |      |                              |
|                                                                                 | $I_{OL} = 100\ \mu\text{A}$                                                             | Full range    | 175      |             |      | 175       |             |      | mV                           |
|                                                                                 | $I_{OL} = 1\text{ mA}$                                                                  |               | 225      |             |      | 225       |             |      |                              |
|                                                                                 | $I_{OL} = 10\text{ mA}$                                                                 |               | 1.2      |             |      | 1.2       |             |      |                              |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_{IC} = \pm 2.5\text{ V}, R_L = 2\text{ k}\Omega, V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          | 50       | 220         |      | 50        | 220         |      | V/mV                         |
|                                                                                 |                                                                                         | Full range    | 10       |             |      | 10        |             |      |                              |
| $r_i$ Input resistance                                                          |                                                                                         | 25°C          | 70       |             |      | 70        |             |      | M $\Omega$                   |
| $c_i$ Input capacitance                                                         |                                                                                         | 25°C          | 2.5      |             |      | 2.5       |             |      | pF                           |
| $z_o$ Open-loop output impedance                                                | $f = 1\text{ MHz}$                                                                      | 25°C          | 30       |             |      | 30        |             |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50\ \Omega$                                                 | 25°C          | 85       | 118         |      | 85        | 118         |      | dB                           |
|                                                                                 |                                                                                         | Full range    | 80       |             |      | 80        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}, R_S = 50\ \Omega$                    | 25°C          | 90       | 106         |      | 90        | 106         |      | dB                           |
|                                                                                 |                                                                                         | Full range    | 85       |             |      | 85        |             |      |                              |
| $I_{CC}$ Supply current                                                         | $V_O = 2.5\text{ V}, V_{IC} = 2.5\text{ V}$                                             | 25°C          | 6.6      | 8.8         |      | 6.6       | 8.8         |      | mA                           |
|                                                                                 |                                                                                         | Full range    |          |             | 9.2  |           |             | 9.2  |                              |

$^\dagger$  Full range is -40°C to 105°C.



**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142I operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                              |                                                             | TLE2142I |     |      | TLE2142AI |     |                              | UNIT                         |
|-------------|---------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------|----------|-----|------|-----------|-----|------------------------------|------------------------------|
|             |                                             |                                                                              |                                                             | MIN      | TYP | MAX  | MIN       | TYP | MAX                          |                              |
| SR +        | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$<br>$R_L = 2\text{ k}\Omega^\dagger$ |                                                             | 45       |     |      | 45        |     |                              | V/ $\mu\text{s}$             |
| SR –        | Negative slew rate                          |                                                                              |                                                             | 42       |     |      | 42        |     |                              |                              |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>2.5-V step                                                | To 0.1%                                                     | 0.16     |     |      | 0.16      |     |                              | $\mu\text{s}$                |
|             |                                             |                                                                              | To 0.01%                                                    | 0.22     |     |      | 0.22      |     |                              |                              |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ ,<br>$f = 10\text{ Hz}$                             | 15                                                          |          |     | 15   |           |     | $\text{nV}/\sqrt{\text{Hz}}$ |                              |
|             |                                             | $R_S = 20\text{ }\Omega$ ,<br>$f = 1\text{ kHz}$                             | 10.5                                                        |          |     | 10.5 |           |     |                              |                              |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                           |                                                             | 0.48     |     |      | 0.48      |     |                              | $\mu\text{V}$                |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                          |                                                             | 0.51     |     |      | 0.51      |     |                              |                              |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                           |                                                             | 1.92     |     |      | 1.92      |     |                              | $\text{pA}/\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                           |                                                             | 0.5      |     |      | 0.5       |     |                              |                              |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }3\text{ V}$ ,<br>$A_{VD} = 2$ ,                         | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 10\text{ kHz}$   | 0.0052%  |     |      | 0.0052%   |     |                              |                              |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega^\dagger$ ,                                           | $C_L = 100\text{ pF}$                                       | 5.9      |     |      | 5.9       |     |                              | MHz                          |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 100\text{ kHz}$                   | $C_L = 100\text{ pF}$                                       | 5.8      |     |      | 5.8       |     |                              | MHz                          |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}$ ,<br>$A_{VD} = 1$ ,                                 | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}$ | 660      |     |      | 660       |     |                              | kHz                          |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega^\dagger$ ,                                           | $C_L = 100\text{ pF}$                                       | 57°      |     |      | 57°       |     |                              |                              |

<sup>†</sup>  $R_L$  terminates at 2.5 V.

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                        | $T_A^\dagger$ | TLE2142I    |               |     | TLE2142I    |               |     | UNIT             |
|---------------------------------------------------------------------------------|--------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                        |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, R_S = 50 \Omega, V_O = 0$                 | 25°C          | 290         | 1200          |     | 275         | 750           |     | $\mu V$          |
|                                                                                 |                                                        | Full range    |             | 1800          |     |             | 1400          |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                        | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                        | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                        | Full range    |             | 200           |     |             | 200           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                        | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                        | Full range    |             | -1.7          |     |             | -1.7          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                      | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                        | Full range    | -15 to 12.7 | -15.3 to 12.9 |     | -15 to 12.7 | -15.3 to 12.9 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                     | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 | $I_O = -1.5 mA$                                        |               | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 | $I_O = -15 mA$                                         |               | 13.3        | 13.7          |     | 13.3        | 13.7          |     |                  |
|                                                                                 | $I_O = -100 \mu A$                                     | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1 mA$                                          |               | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -10 mA$                                         |               | 13.3        |               |     | 13.3        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                      | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 | $I_O = 1.5 mA$                                         |               | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 | $I_O = 15 mA$                                          |               | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 | $I_O = 100 \mu A$                                      | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1 mA$                                           |               | -14.5       |               |     | -14.5       |               |     |                  |
|                                                                                 | $I_O = 10 mA$                                          |               | -13.4       |               |     | -13.4       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10 V, R_L = 2 k\Omega$                      | 25°C          | 100         | 450           |     | 100         | 450           |     | V/mV             |
|                                                                                 |                                                        | Full range    | 40          |               |     | 40          |               |     |                  |
| $r_i$ Input resistance                                                          |                                                        | 25°C          | 65          |               |     | 65          |               |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                        | 25°C          | 2.5         |               |     | 2.5         |               |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1 MHz$                                            | 25°C          | 30          |               |     | 30          |               |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}$                                  | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 | $R_S = 50 \Omega$                                      | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5 V$ to $\pm 15 V, R_S = 50 \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                        | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                              | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                        |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0, \text{ No load}$                             | 25°C          | 6.9         | 9             |     | 6.9         | 9             |     | mA               |
|                                                                                 |                                                        | Full range    |             | 9.4           |     |             | 9.4           |     |                  |

$^\dagger$  Full range is  $-40^\circ C$  to  $105^\circ C$ .

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142I operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                    |                                                     | TLE2142I |            |     | TLE2142AI |            |     | UNIT                         |
|-------------|---------------------------------------------|----------------------------------------------------|-----------------------------------------------------|----------|------------|-----|-----------|------------|-----|------------------------------|
|             |                                             |                                                    |                                                     | MIN      | TYP        | MAX | MIN       | TYP        | MAX |                              |
| SR+         | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$           | $R_L = 2\text{ k}\Omega$                            | 30       | 45         |     | 30        | 45         |     | $\text{V}/\mu\text{s}$       |
| SR–         | Negative slew rate                          |                                                    |                                                     | 30       | 42         |     | 30        | 42         |     |                              |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>10-V step                       | To 0.1%                                             |          | 0.34       |     |           | 0.34       |     | $\mu\text{s}$                |
|             |                                             |                                                    | To 0.01%                                            |          | 0.4        |     |           | 0.4        |     |                              |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ , $f = 10\text{ Hz}$      |                                                     |          | 15         |     |           | 15         |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ , $f = 1\text{ kHz}$      |                                                     |          | 10.5       |     |           | 10.5       |     |                              |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                 |                                                     |          | 0.48       |     |           | 0.48       |     | $\mu\text{V}$                |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                |                                                     |          | 0.51       |     |           | 0.51       |     |                              |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                 |                                                     |          | 1.89       |     |           | 1.89       |     | $\text{pA}/\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                 |                                                     |          | 0.47       |     |           | 0.47       |     |                              |
| THD + N     | Total harmonic distortion plus noise        | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 10$ ,     | $R_L = 2\text{ k}\Omega$ ,<br>$f = 10\text{ kHz}$   |          | 0.01%      |     |           | 0.01%      |     |                              |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega$ ,                         | $C_L = 100\text{ pF}$                               |          | 6          |     |           | 6          |     | MHz                          |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega$ ,<br>$f = 100\text{ kHz}$ | $C_L = 100\text{ pF}$                               |          | 5.9        |     |           | 5.9        |     | MHz                          |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 1$ ,      | $R_L = 2\text{ k}\Omega$ ,<br>$C_L = 100\text{ pF}$ |          | 668        |     |           | 668        |     | kHz                          |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega$ ,                         | $C_L = 100\text{ pF}$                               |          | $58^\circ$ |     |           | $58^\circ$ |     |                              |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144I electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                        | TEST CONDITIONS                                                                             | $T_A^\dagger$ | TLE2144I |             |      | TLE2144AI |             |      | UNIT                         |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                                  |                                                                                             |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                    | $V_{IC} = 0, V_O = 0, R_S = 50\ \Omega$                                                     | 25°C          | 0.5      | 3.8         |      | 0.5       | 3           |      | mV                           |
|                                                                                  |                                                                                             | Full range    |          |             | 4.8  |           |             | 4    |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                   |                                                                                             | Full range    |          | 1.7         |      |           | 1.7         |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                    |                                                                                             | 25°C          | 8        | 100         |      | 8         | 100         |      | nA                           |
|                                                                                  |                                                                                             | Full range    |          |             | 200  |           |             | 200  |                              |
| $I_{IB}$ Input bias current                                                      |                                                                                             | 25°C          | –0.8     | –2          |      | –0.8      | –2          |      | $\mu\text{A}$                |
|                                                                                  |                                                                                             | Full range    |          |             | –2.2 |           |             | –2.2 |                              |
| $V_{ICR}$ Common-mode input voltage range                                        | $R_S = 50\ \Omega$                                                                          | 25°C          | 0 to 3   | –0.3 to 3.2 |      | 0 to 3    | –0.3 to 3.2 |      | V                            |
|                                                                                  |                                                                                             | Full range    | 0 to 2.7 | –0.3 to 2.9 |      | 0 to 2.7  | –0.3 to 2.9 |      |                              |
| $V_{OH}$ High-level output voltage                                               | $I_{OH} = -150\ \mu\text{A}$                                                                | 25°C          | 3.9      | 4.1         |      | 3.9       | 4.1         |      | V                            |
|                                                                                  | $I_{OH} = -1.5\ \text{mA}$                                                                  |               | 3.8      | 4           |      | 3.8       | 4           |      |                              |
|                                                                                  | $I_{OH} = -15\ \text{mA}$                                                                   |               | 3.4      | 3.7         |      | 3.4       | 3.7         |      |                              |
|                                                                                  | $I_{OH} = 100\ \mu\text{A}$                                                                 | Full range    | 3.8      |             |      | 3.8       |             |      |                              |
|                                                                                  | $I_{OH} = 1\ \text{mA}$                                                                     |               | 3.7      |             |      | 3.7       |             |      |                              |
|                                                                                  | $I_{OH} = 10\ \text{mA}$                                                                    |               | 3.5      |             |      | 3.5       |             |      |                              |
| $V_{OL}$ Low-level output voltage                                                | $I_{OL} = 150\ \mu\text{A}$                                                                 | 25°C          | 75       | 125         |      | 75        | 125         |      | mV                           |
|                                                                                  | $I_{OL} = 1.5\ \mu\text{A}$                                                                 |               | 150      | 225         |      | 150       | 225         |      |                              |
|                                                                                  | $I_{OL} = 15\ \text{mA}$                                                                    |               | 1.2      | 1.6         |      | 1.2       | 1.6         |      | V                            |
|                                                                                  | $I_{OL} = 100\ \mu\text{A}$                                                                 | Full range    |          | 175         |      |           | 175         |      | mV                           |
|                                                                                  | $I_{OL} = 1\ \text{mA}$                                                                     |               |          | 225         |      |           | 225         |      |                              |
|                                                                                  | $I_{OL} = 10\ \text{mA}$                                                                    |               |          | 1.4         |      |           | 1.4         |      | V                            |
| $A_{VD}$ Large-signal differential voltage amplification                         | $V_{IC} = \pm 2.5\ \text{V}, V_O = 1\ \text{V to } -1.5\ \text{V}, R_L = 2\ \text{k}\Omega$ | 25°C          | 50       | 95          |      | 50        | 95          |      | V/mV                         |
|                                                                                  |                                                                                             | Full range    | 10       |             |      | 10        |             |      |                              |
| $r_i$ Input resistance                                                           |                                                                                             | 25°C          |          | 70          |      |           | 70          |      | M $\Omega$                   |
| $c_i$ Input capacitance                                                          |                                                                                             | 25°C          |          | 2.5         |      |           | 2.5         |      | pF                           |
| $z_o$ Open-loop output impedance                                                 | $f = 1\ \text{MHz}$                                                                         | 25°C          |          | 30          |      |           | 30          |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                 | $V_{IC} = V_{ICRmin}, R_S = 50\ \Omega$                                                     | 25°C          | 85       | 118         |      | 85        | 118         |      | dB                           |
|                                                                                  |                                                                                             | Full range    | 80       |             |      | 80        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC} \pm / \Delta V_{IO}$ ) | $V_{CC} \pm = \pm 2.5\ \text{V to } \pm 15\ \text{V}, R_S = 50\ \Omega$                     | 25°C          | 90       | 106         |      | 90        | 106         |      | dB                           |
|                                                                                  |                                                                                             | Full range    | 85       |             |      | 85        |             |      |                              |
| $I_{CC}$ Supply current                                                          | $V_O = 2.5\ \text{V}, V_{IC} = 2.5\ \text{V}$ No load,                                      | 25°C          |          | 13.2        | 17.6 |           | 13.2        | 17.6 | mA                           |
|                                                                                  |                                                                                             | Full range    |          |             | 18.4 |           |             | 18.4 |                              |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $105^\circ\text{C}$ .

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144I operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                |          | TLE2144I |     |     | TLE2144AI |     |     | UNIT   |
|--------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                                                |          | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR +               | Positive slew rate                          | A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ <sup>†</sup> ,<br>C <sub>L</sub> = 500 pF                          |          | 45       |     |     | 45        |     |     | V/μs   |
| SR −               | Negative slew rate                          |                                                                                                                |          | 42       |     |     | 42        |     |     |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>2.5-V step                                                                            | To 0.1%  | 0.16     |     |     | 0.16      |     |     | μs     |
|                    |                                             |                                                                                                                | To 0.01% | 0.22     |     |     | 0.22      |     |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, f = 10 Hz                                                                               |          | 15       |     |     | 15        |     |     | nV/√Hz |
|                    |                                             | R <sub>S</sub> = 20 Ω, f = 1 kHz                                                                               |          | 10.5     |     |     | 10.5      |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                             |          | 0.48     |     |     | 0.48      |     |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                            |          | 0.51     |     |     | 0.51      |     |     |        |
| I <sub>n</sub>     | Equivalent input noise current              | f = 10 Hz                                                                                                      |          | 1.92     |     |     | 1.92      |     |     | pA/√Hz |
|                    |                                             | f = 10 kHz                                                                                                     |          | 0.5      |     |     | 0.5       |     |     |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = 1 V to 3 V, R <sub>L</sub> = 2 kΩ <sup>†</sup> ,<br>A <sub>VD</sub> = 2, f = 10 kHz           |          | 0.0052%  |     |     | 0.0052%   |     |     |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | R <sub>L</sub> = 2 kΩ <sup>†</sup> , C <sub>L</sub> = 100 pF                                                   |          | 5.9      |     |     | 5.9       |     |     | MHz    |
|                    | Gain-bandwidth product                      | R <sub>L</sub> = 2 kΩ <sup>†</sup> , C <sub>L</sub> = 100 pF,<br>f = 100 kHz                                   |          | 5.8      |     |     | 5.8       |     |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V, R <sub>L</sub> = 2 kΩ <sup>†</sup> ,<br>A <sub>VD</sub> = 1, C <sub>L</sub> = 100 pF |          | 660      |     |     | 660       |     |     | kHz    |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 2 kΩ <sup>†</sup> , C <sub>L</sub> = 100 pF                                                   |          | 57°      |     |     | 57°       |     |     |        |

<sup>†</sup>  $R_L$  terminates at 2.5 V

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$ | TLE2144I    |               |     | TLE2144AI   |               |     | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                          |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, R_S = 50 \Omega, V_O = 0$                   | 25°C          | 0.6         | 2.4           |     | 0.5         | 1.5           |     | mV               |
|                                                                                 |                                                          | Full range    |             |               | 3.2 |             |               | 2.8 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                          | Full range    |             | 200           |     |             | 200           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                          | Full range    |             | -1.7          |     |             | -1.7          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                        | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                          | Full range    | -15 to 12.7 | -15.3 to 12.9 |     | -15 to 12.7 | -15.3 to 12.9 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                       | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 | $I_O = -1.5$ mA                                          |               | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 | $I_O = -15$ mA                                           |               | 13.1        | 13.7          |     | 13.1        | 13.7          |     |                  |
|                                                                                 | $I_O = -100 \mu A$                                       | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1$ mA                                            |               | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -10$ mA                                           |               | 13.1        |               |     | 13.1        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                        | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 | $I_O = 1.5$ mA                                           |               | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 | $I_O = 15$ mA                                            |               | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 | $I_O = 100 \mu A$                                        | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1$ mA                                             |               | -14.5       |               |     | -14.5       |               |     |                  |
|                                                                                 | $I_O = 10$ mA                                            |               | -13.4       |               |     | -13.4       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10$ V, $R_L = 2$ k $\Omega$                   | 25°C          | 100         | 170           |     | 100         | 170           |     | V/mV             |
|                                                                                 |                                                          | Full range    | 40          |               |     | 40          |               |     |                  |
| $r_i$ Input resistance                                                          |                                                          | 25°C          | 65          |               |     | 65          |               |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                          | 25°C          | 2.5         |               |     | 2.5         |               |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                              | 25°C          | 30          |               |     | 30          |               |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                   | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 |                                                          | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                          | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$ $\frac{V_{ID} = 1$ V<br>$V_{ID} = -1$ V        | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                          |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0$ , No load                                      | 25°C          | 13.8        | 18            |     | 13.8        | 18            |     | mA               |
|                                                                                 |                                                          | Full range    |             | 18.8          |     |             | 18.8          |     |                  |

$^\dagger$  Full range is -40°C to 105°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144I operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                         |                                                | TLE2144I |      |       | TLE2144AI |        |      | UNIT |
|--------------------|---------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------|----------|------|-------|-----------|--------|------|------|
|                    |                                             |                                                                         |                                                | MIN      | TYP  | MAX   | MIN       | TYP    | MAX  |      |
| SR +               | Positive slew rate                          | A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 500 pF |                                                | 27       | 45   |       | 27        | 45     | V/μs |      |
| SR −               | Negative slew rate                          |                                                                         |                                                | 27       | 42   |       | 27        | 42     |      |      |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step                                      | To 0.1%                                        | 0.34     |      | 0.34  |           | μs     |      |      |
|                    |                                             |                                                                         | To 0.01%                                       | 0.4      |      | 0.4   |           |        |      |      |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, f = 10 Hz                                        | 15                                             |          | 15   |       | nV/√Hz    |        |      |      |
|                    |                                             | R <sub>S</sub> = 20 Ω, f = 1 kHz                                        | 10.5                                           |          | 10.5 |       |           |        |      |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                      |                                                | 0.48     |      | 0.48  |           | μV     |      |      |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                     |                                                | 0.51     |      | 0.51  |           |        |      |      |
| I <sub>n</sub>     | Equivalent input noise current              | f = 10 Hz                                                               |                                                | 1.89     |      | 1.89  |           | pA/√Hz |      |      |
|                    |                                             | f = 1 kHz                                                               |                                                | 0.47     |      | 0.47  |           |        |      |      |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10,                        | R <sub>L</sub> = 2 kΩ, f = 10 kHz              | 0.01%    |      | 0.01% |           |        |      |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | R <sub>L</sub> = 2 kΩ,                                                  | C <sub>L</sub> = 100 pF                        | 6        |      | 6     |           | MHz    |      |      |
|                    | Gain-bandwidth product                      | R <sub>L</sub> = 2 kΩ, f = 100 kHz                                      | C <sub>L</sub> = 100 pF,                       | 5.9      |      | 5.9   |           | MHz    |      |      |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 1,                         | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF | 668      |      | 668   |           | kHz    |      |      |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 2 kΩ,                                                  | C <sub>L</sub> = 100 pF                        | 58°      |      | 58°   |           |        |      |      |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141M electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                                                  | $T_A^\dagger$ | TLE2141M |             |      | TLE2141AM |             |      | UNIT                         |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                               |                                                                                                  |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                 | $V_O = 2.5\text{ V}$<br>$V_{IC} = 2.5\text{ V}$<br>$R_S = 50\ \Omega$                            | 25°C          | 225      | 1400        |      | 200       | 1000        |      | $\mu\text{V}$                |
|                                                                               |                                                                                                  | Full range    |          |             | 2100 |           |             | 1700 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                                                  | Full range    |          | 1.7         |      |           | 1.7         |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                 |                                                                                                  | 25°C          | 8        | 100         |      | 8         | 100         |      | nA                           |
|                                                                               |                                                                                                  | Full range    |          |             | 250  |           |             | 250  |                              |
| $I_{IB}$ Input bias current                                                   |                                                                                                  | 25°C          | -0.8     | -2          |      | -0.8      | -2          |      | $\mu\text{A}$                |
|                                                                               |                                                                                                  | Full range    |          |             | -2.3 |           |             | -2.3 |                              |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50\ \Omega$                                                                               | 25°C          | 0 to 3   | -0.3 to 3.2 |      | 0 to 3    | -0.3 to 3.2 |      | V                            |
|                                                                               |                                                                                                  | Full range    | 0 to 2.7 | -0.3 to 2.9 |      | 0 to 2.7  | -0.3 to 2.9 |      |                              |
| $V_{OH}$ High-level output voltage                                            | $I_{OH} = -150\ \mu\text{A}$                                                                     | 25°C          | 3.9      | 4.1         |      | 3.9       | 4.1         |      | V                            |
|                                                                               | $I_{OH} = -1.5\text{ mA}$                                                                        |               | 3.8      | 4           |      | 3.8       | 4           |      |                              |
|                                                                               | $I_{OH} = -15\text{ mA}$                                                                         |               | 3.2      | 3.7         |      | 3.2       | 3.7         |      |                              |
|                                                                               | $I_{OH} = -100\ \mu\text{A}$                                                                     | Full range    | 3.75     |             |      | 3.75      |             |      |                              |
|                                                                               | $I_{OH} = -1\text{ mA}$                                                                          |               | 3.65     |             |      | 3.65      |             |      |                              |
|                                                                               | $I_{OH} = -10\text{ mA}$                                                                         |               | 3.25     |             |      | 3.25      |             |      |                              |
| $V_{OL}$ Low-level output voltage                                             | $I_{OL} = 150\ \mu\text{A}$                                                                      | 25°C          | 75       | 125         |      | 75        | 125         |      | mV                           |
|                                                                               | $I_{OL} = 1.5\ \mu\text{A}$                                                                      |               | 150      | 225         |      | 150       | 225         |      |                              |
|                                                                               | $I_{OL} = 15\text{ mA}$                                                                          |               | 1.2      | 1.4         |      | 1.2       | 1.4         |      | V                            |
|                                                                               | $I_{OL} = 100\ \mu\text{A}$                                                                      | Full range    | 200      |             |      | 200       |             |      | mV                           |
|                                                                               | $I_{OL} = 1\text{ mA}$                                                                           |               | 250      |             |      | 225       |             |      |                              |
|                                                                               | $I_{OL} = 10\text{ mA}$                                                                          |               | 1.25     |             |      | 1.25      |             |      | V                            |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_{IC} = \pm 2.5\text{ V}$ , $R_L = 2\text{ k}\Omega$ ,<br>$V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          | 50       | 220         |      | 50        | 220         |      | V/mV                         |
|                                                                               |                                                                                                  | Full range    | 5        |             |      | 5         |             |      |                              |
| $r_i$ Input resistance                                                        |                                                                                                  | 25°C          | 70       |             |      | 70        |             |      | $\text{M}\Omega$             |
| $c_i$ Input capacitance                                                       |                                                                                                  | 25°C          | 2.5      |             |      | 2.5       |             |      | pF                           |
| $z_o$ Open-loop output impedance                                              | $f = 1\text{ MHz}$                                                                               | 25°C          | 30       |             |      | 30        |             |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                                       | 25°C          | 85       | 118         |      | 85        | 118         |      | dB                           |
|                                                                               |                                                                                                  | Full range    | 80       |             |      | 80        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$                       | 25°C          | 90       | 106         |      | 90        | 106         |      | dB                           |
|                                                                               |                                                                                                  | Full range    | 85       |             |      | 85        |             |      |                              |
| $I_{CC}$ Supply current                                                       | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$ No load,                                       | 25°C          | 3.4      | 4.4         |      | 3.4       | 4.4         |      | mA                           |
|                                                                               |                                                                                                  | Full range    |          | 4.6         |      |           | 4.6         |      |                              |

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141M operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                                   |                                  | TLE2141M |     |     | TLE2141AM |     |     | UNIT                   |
|-------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------------------------|----------|-----|-----|-----------|-----|-----|------------------------|
|             |                                             |                                                                                                                   |                                  | MIN      | TYP | MAX | MIN       | TYP | MAX |                        |
| SR +        | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$                                                                          | $R_L = 2\text{ k}\Omega^\dagger$ | 45       |     |     | 45        |     |     | V/ $\mu\text{s}$       |
| SR –        | Negative slew rate                          |                                                                                                                   |                                  | 42       |     |     | 42        |     |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>2.5-V step                                                                                     | To 0.1%                          | 0.16     |     |     | 0.16      |     |     | $\mu\text{s}$          |
|             |                                             |                                                                                                                   | To 0.01%                         | 0.22     |     |     | 0.22      |     |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ ,<br>$f = 10\text{ Hz}$                                                                  |                                  | 15       |     |     | 15        |     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ ,<br>$f = 1\text{ kHz}$                                                                  |                                  | 10.5     |     |     | 10.5      |     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                                |                                  | 0.48     |     |     | 0.48      |     |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                               |                                  | 0.51     |     |     | 0.51      |     |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                                                                |                                  | 1.92     |     |     | 1.92      |     |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                                |                                  | 0.5      |     |     | 0.5       |     |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }3\text{ V}$ ,<br>$A_{VD} = 2$ ,<br>$R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 10\text{ kHz}$ |                                  | 0.0052%  |     |     | 0.0052%   |     |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}^\dagger$                                               |                                  | 5.9      |     |     | 5.9       |     |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 100\text{ kHz}$                                                        | $C_L = 100\text{ pF}^\dagger$    | 5.8      |     |     | 5.8       |     |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}$ ,<br>$A_{VD} = 1$                                                                        | $R_L = 2\text{ k}\Omega^\dagger$ | 660      |     |     | 660       |     |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}^\dagger$                                               |                                  | 57°      |     |     | 57°       |     |     |                        |

$^\dagger R_L$  and  $C_L$  terminated to 2.5 V.

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$ | TLE2141M    |               |     | TLE2141AM   |               |     | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                          |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, R_S = 50 \Omega$                            | 25°C          | 200         | 900           |     | 175         | 500           |     | $\mu V$          |
|                                                                                 |                                                          | Full range    |             | 1700          |     |             | 1200          |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                          | Full range    |             | 250           |     |             | 250           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                          | Full range    |             | -1.8          |     |             | -1.8          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                        | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                          | Full range    | -15 to 12.7 | -15.3 to 12.9 |     | -15 to 12.7 | -15.3 to 12.9 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                       | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 | $I_O = -1.5$ mA                                          |               | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 | $I_O = -15$ mA                                           |               | 13.1        | 13.7          |     | 13.1        | 13.7          |     |                  |
|                                                                                 | $I_O = -100 \mu A$                                       | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1$ mA                                            |               | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -10$ mA                                           |               | 13.1        |               |     | 13.1        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                        | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 | $I_O = 1.5$ mA                                           |               | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 | $I_O = 15$ mA                                            |               | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 | $I_O = 100 \mu A$                                        | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1$ mA                                             |               | -14.5       |               |     | -14.5       |               |     |                  |
|                                                                                 | $I_O = 10$ mA                                            |               | -13.4       |               |     | -13.4       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10$ V, $R_L = 2$ k $\Omega$                   | 25°C          | 100         | 450           |     | 100         | 450           |     | V/mV             |
|                                                                                 |                                                          | Full range    | 20          |               |     | 20          |               |     |                  |
| $r_i$ Input resistance                                                          |                                                          | 25°C          | 65          |               |     | 65          |               |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                          | 25°C          | 2.5         |               |     | 2.5         |               |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                              | 25°C          | 30          |               |     | 30          |               |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                   | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 |                                                          | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                          | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                          |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0, V_{IC} = 2.5$ V No load,                       | 25°C          | 3.5         | 4.5           |     | 3.5         | 4.5           |     | mA               |
|                                                                                 |                                                          | Full range    |             | 4.7           |     |             | 4.7           |     |                  |

$^\dagger$  Full range is -55°C to 125°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141M operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                |                          | TLE2141M |       |     | TLE2141AM |       |     | UNIT                   |
|-------------|---------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------|----------|-------|-----|-----------|-------|-----|------------------------|
|             |                                             |                                                                                                |                          | MIN      | TYP   | MAX | MIN       | TYP   | MAX |                        |
| SR+         | Positive slew rate                          | $A_{VD} = -1$ ,<br>$C_L = 100\text{ pF}$                                                       | $R_L = 2\text{ k}\Omega$ | 27       | 45    |     | 27        | 45    |     | V/ $\mu\text{s}$       |
| SR–         | Negative slew rate                          |                                                                                                |                          | 27       | 42    |     | 27        | 42    |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>10-V step                                                                   | To 0.1%                  |          | 0.34  |     |           | 0.34  |     | $\mu\text{s}$          |
|             |                                             |                                                                                                | To 0.01%                 |          | 0.4   |     |           | 0.4   |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ , $f = 10\text{ Hz}$                                                  |                          |          | 15    |     |           | 15    |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ , $f = 1\text{ kHz}$                                                  |                          |          | 10.5  |     |           | 10.5  |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                             |                          |          | 0.48  |     |           | 0.48  |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                            |                          |          | 0.51  |     |           | 0.51  |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                                                             |                          |          | 1.89  |     |           | 1.89  |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                             |                          |          | 0.47  |     |           | 0.47  |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_{O(PP)} = 20\text{ V}$ , $R_L = 2\text{ k}\Omega$ ,<br>$A_{VD} = 10$ , $f = 10\text{ kHz}$  |                          |          | 0.01% |     |           | 0.01% |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$                                               |                          |          | 6     |     |           | 6     |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$ ,<br>$f = 100\text{ kHz}$                     |                          |          | 5.9   |     |           | 5.9   |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 20\text{ V}$ , $R_L = 2\text{ k}\Omega$ ,<br>$A_{VD} = 1$ , $C_L = 100\text{ pF}$ |                          |          | 668   |     |           | 668   |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$                                               |                          |          | 58°   |     |           | 58°   |     |                        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142M electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                                                   | $T_A^\dagger$ | TLE2142M |             |      | TLE2142AM |             |      | UNIT                         |
|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------|----------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                                 |                                                                                                   |               | MIN      | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                                   | $V_O = 2.5\text{ V},$<br>$V_{IC} = 2.5\text{ V}$<br>$R_S = 50\ \Omega$                            | 25°C          | 220      | 1900        |      | 200       | 1500        |      | $\mu\text{V}$                |
|                                                                                 |                                                                                                   | Full range    |          |             | 2600 |           |             | 2200 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                                                   | Full range    | 1.7      |             |      | 1.7       |             |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                   |                                                                                                   | 25°C          | 8        | 100         |      | 8         | 100         |      | nA                           |
|                                                                                 |                                                                                                   | Full range    |          |             | 200  |           |             | 200  |                              |
| $I_{IB}$ Input bias current                                                     |                                                                                                   | 25°C          | -0.8     | -2          |      | -0.8      | -2          |      | $\mu\text{A}$                |
|                                                                                 |                                                                                                   | Full range    |          |             | -2.3 |           |             | -2.3 |                              |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                                | 25°C          | 0 to 3   | -0.3 to 3.2 |      | 0 to 3    | -0.3 to 3.2 |      | V                            |
|                                                                                 |                                                                                                   | Full range    | 0 to 2.7 | -0.3 to 2.9 |      | 0 to 2.7  | -0.3 to 2.9 |      |                              |
| $V_{OH}$ High-level output voltage                                              | $I_{OH} = -150\ \mu\text{A}$                                                                      | 25°C          | 3.9      | 4.1         |      | 3.9       | 4.1         |      | V                            |
|                                                                                 | $I_{OH} = -1.5\text{ mA}$                                                                         |               | 3.8      | 4           |      | 3.8       | 4           |      |                              |
|                                                                                 | $I_{OH} = -15\text{ mA}$                                                                          |               | 3.4      | 3.7         |      | 3.4       | 3.7         |      |                              |
|                                                                                 | $I_{OH} = 100\ \mu\text{A}$                                                                       | Full range    | 3.75     |             |      | 3.75      |             |      |                              |
|                                                                                 | $I_{OH} = 1\text{ mA}$                                                                            |               | 3.65     |             |      | 3.65      |             |      |                              |
|                                                                                 | $I_{OH} = 10\text{ mA}$                                                                           |               | 3.45     |             |      | 3.45      |             |      |                              |
| $V_{OL}$ Low-level output voltage                                               | $I_{OL} = 150\ \mu\text{A}$                                                                       | 25°C          | 75       | 125         |      | 75        | 125         |      | mV                           |
|                                                                                 | $I_{OL} = 1.5\text{ mA}$                                                                          |               | 150      | 225         |      | 150       | 225         |      |                              |
|                                                                                 | $I_{OL} = 15\text{ mA}$                                                                           |               | 1.2      | 1.4         |      | 1.2       | 1.4         |      | V                            |
|                                                                                 | $I_{OL} = 100\ \mu\text{A}$                                                                       | Full range    | 200      |             |      | 200       |             |      | mV                           |
|                                                                                 | $I_{OL} = 1\text{ mA}$                                                                            |               | 250      |             |      | 250       |             |      |                              |
|                                                                                 | $I_{OL} = 10\text{ mA}$                                                                           |               | 1.25     |             |      | 1.25      |             |      | V                            |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_{IC} = \pm 2.5\text{ V},$<br>$R_L = 2\text{ k}\Omega,$<br>$V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          | 50       | 220         |      | 50        | 220         |      | V/mV                         |
|                                                                                 |                                                                                                   | Full range    | 5        |             |      | 5         |             |      |                              |
| $r_i$ Input resistance                                                          |                                                                                                   | 25°C          | 70       |             |      | 70        |             |      | $\text{M}\Omega$             |
| $c_i$ Input capacitance                                                         |                                                                                                   | 25°C          | 2.5      |             |      | 2.5       |             |      | pF                           |
| $z_o$ Open-loop output impedance                                                | $f = 1\text{ MHz}$                                                                                | 25°C          | 30       |             |      | 30        |             |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin},$ $R_S = 50\ \Omega$                                                         | 25°C          | 85       | 118         |      | 85        | 118         |      | dB                           |
|                                                                                 |                                                                                                   | Full range    | 80       |             |      | 80        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V},$<br>$R_S = 50\ \Omega$                         | 25°C          | 90       | 106         |      | 90        | 106         |      | dB                           |
|                                                                                 |                                                                                                   | Full range    | 85       |             |      | 85        |             |      |                              |
| $I_{CC}$ Supply current                                                         | $V_O = 2.5\text{ V},$<br>$V_{IC} = 2.5\text{ V}$<br>No load,                                      | 25°C          | 6.6      | 8.8         |      | 6.6       | 8.8         |      | mA                           |
|                                                                                 |                                                                                                   | Full range    |          |             | 9.2  |           |             | 9.2  |                              |

$^\dagger$  Full range is -55°C to 125°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142M operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                                | TEST CONDITIONS                                                                |                                                             | TLE2142M |     |     | TLE2142AM |     |     | UNIT                   |
|-------------|------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------|----------|-----|-----|-----------|-----|-----|------------------------|
|             |                                                |                                                                                |                                                             | MIN      | TYP | MAX | MIN       | TYP | MAX |                        |
| SR +        | Positive slew rate                             | $A_{VD} = -1$ ,<br>$C_L = 500\text{ pF}$<br>$R_L = 2\text{ k}\Omega^\dagger$ , |                                                             | 45       |     |     | 45        |     |     | V/ $\mu\text{s}$       |
| SR –        | Negative slew rate                             |                                                                                |                                                             | 42       |     |     | 42        |     |     |                        |
| $t_s$       | Settling time                                  | $A_{VD} = -1$ ,<br>2.5-V step                                                  | To 0.1%                                                     | 0.16     |     |     | 0.16      |     |     | $\mu\text{s}$          |
|             |                                                |                                                                                | To 0.01%                                                    | 0.22     |     |     | 0.22      |     |     |                        |
| $V_n$       | Equivalent input noise volt-<br>age            | $R_S = 20\text{ }\Omega$ ,                                                     | $f = 10\text{ Hz}$                                          | 15       |     |     | 15        |     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                                | $R_S = 20\text{ }\Omega$ ,                                                     | $f = 1\text{ kHz}$                                          | 10.5     |     |     | 10.5      |     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent<br>input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                             |                                                             | 0.48     |     |     | 0.48      |     |     | $\mu\text{V}$          |
|             |                                                | $f = 0.1\text{ Hz to }10\text{ Hz}$                                            |                                                             | 0.51     |     |     | 0.51      |     |     |                        |
| $I_n$       | Equivalent input noise cur-<br>rent            | $f = 10\text{ Hz}$                                                             |                                                             | 1.92     |     |     | 1.92      |     |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                                | $f = 1\text{ kHz}$                                                             |                                                             | 0.5      |     |     | 0.5       |     |     |                        |
| THD + N     | Total harmonic distortion<br>plus noise        | $V_O = 1\text{ V to }3\text{ V}$ ,<br>$A_{VD} = 2$ ,                           | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 10\text{ kHz}$   | 0.0052%  |     |     | 0.0052%   |     |     |                        |
| $B_1$       | Unity-gain bandwidth                           | $R_L = 2\text{ k}\Omega^\dagger$ ,                                             | $C_L = 100\text{ pF}$                                       | 5.9      |     |     | 5.9       |     |     | MHz                    |
|             | Gain-bandwidth product                         | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$f = 100\text{ kHz}$                     | $C_L = 100\text{ pF}$                                       | 5.8      |     |     | 5.8       |     |     | MHz                    |
| $B_{OM}$    | Maximum output-swing<br>bandwidth              | $V_{O(PP)} = 2\text{ V}$ ,<br>$A_{VD} = 1$ ,                                   | $R_L = 2\text{ k}\Omega^\dagger$ ,<br>$C_L = 100\text{ pF}$ | 660      |     |     | 660       |     |     | kHz                    |
| $\phi_m$    | Phase margin                                   | $R_L = 2\text{ k}\Omega^\dagger$ ,                                             | $C_L = 100\text{ pF}$                                       | 57°      |     |     | 57°       |     |     |                        |

$^\dagger R_L$  terminates at 2.5 V.

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$ | TLE2142M    |               |     | TLE2142AM   |               |     | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                          |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, R_S = 50 \Omega$                            | 25°C          | 290         | 1200          |     | 275         | 750           |     | $\mu V$          |
|                                                                                 |                                                          | Full range    |             | 2000          |     |             | 1600          |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                          | Full range    |             | 250           |     |             | 250           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                          | Full range    |             | -1.8          |     |             | -1.8          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                        | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                          | Full range    | -15 to 12.7 | -15.3 to 12.9 |     | -15 to 12.7 | -15.3 to 12.9 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                       | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 | $I_O = -1.5$ mA                                          |               | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 | $I_O = -15$ mA                                           |               | 13.3        | 13.7          |     | 13.3        | 13.7          |     |                  |
|                                                                                 | $I_O = -100 \mu A$                                       | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1$ mA                                            |               | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -10$ mA                                           |               | 13.3        |               |     | 13.3        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                        | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 | $I_O = 1.5$ mA                                           |               | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 | $I_O = 15$ mA                                            |               | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 | $I_O = 100 \mu A$                                        | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1$ mA                                             |               | -14.5       |               |     | -14.5       |               |     |                  |
|                                                                                 | $I_O = 10$ mA                                            |               | -13.4       |               |     | -13.4       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10$ V, $R_L = 2$ k $\Omega$                   | 25°C          | 100         | 450           |     | 100         | 450           |     | V/mV             |
|                                                                                 |                                                          | Full range    | 20          |               |     | 20          |               |     |                  |
| $r_i$ Input resistance                                                          |                                                          | 25°C          | 65          |               |     | 65          |               |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                          | 25°C          | 2.5         |               |     | 2.5         |               |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                              | 25°C          | 30          |               |     | 30          |               |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                   | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 |                                                          | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                          | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                          |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0, V_{IC} = 2.5$ V No load,                       | 25°C          | 6.9         | 9             |     | 6.9         | 9             |     | mA               |
|                                                                                 |                                                          | Full range    |             | 9.4           |     |             | 9.4           |     |                  |

$^\dagger$  Full range is -55°C to 125°C.

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142M operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                   |                          | TLE2142M |     |     | TLE2142AM |     |      | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------|----------|-----|-----|-----------|-----|------|--------|
|                    |                                             |                                                                                                   |                          | MIN      | TYP | MAX | MIN       | TYP | MAX  |        |
| SR +               | Positive slew rate                          | R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF                                                 | A <sub>VD</sub> = −1,    | 27       | 45  |     | 27        | 45  | V/μs |        |
| SR −               | Negative slew rate                          |                                                                                                   |                          | 27       | 42  |     | 27        | 42  |      |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step                                                                | To 0.1%                  | 0.34     |     |     | 0.34      |     |      | μs     |
|                    |                                             |                                                                                                   | To 0.01%                 | 0.4      |     |     | 0.4       |     |      |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, f = 10 Hz                                                                  |                          | 15       |     |     | 15        |     |      | nV/√Hz |
|                    |                                             | R <sub>S</sub> = 20 Ω, f = 1 kHz                                                                  |                          | 10.5     |     |     | 10.5      |     |      |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                |                          | 0.48     |     |     | 0.48      |     |      | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                               |                          | 0.51     |     |     | 0.51      |     |      |        |
| I <sub>n</sub>     | Equivalent input noise current              | f = 10 Hz                                                                                         |                          | 1.89     |     |     | 1.89      |     |      | pA/√Hz |
|                    |                                             | f = 1 kHz                                                                                         |                          | 0.47     |     |     | 0.47      |     |      |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, R <sub>L</sub> = 2 kΩ,<br>A <sub>VD</sub> = 10, f = 10 kHz             |                          | 0.01%    |     |     | 0.01%     |     |      |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | R <sub>L</sub> = 2 kΩ,                                                                            | C <sub>L</sub> = 100 pF  | 6        |     |     | 6         |     |      | MHz    |
|                    | Gain-bandwidth product                      | R <sub>L</sub> = 2 kΩ,<br>f = 100 kHz                                                             | C <sub>L</sub> = 100 pF, | 5.9      |     |     | 5.9       |     |      | MHz    |
| B <sub>OM</sub>    | Maximum output-swing band-<br>width         | V <sub>O(PP)</sub> = 20 V, R <sub>L</sub> = 2 kΩ,<br>A <sub>VD</sub> = 1, C <sub>L</sub> = 100 pF |                          | 668      |     |     | 668       |     |      | kHz    |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 2 kΩ,                                                                            | C <sub>L</sub> = 100 pF  | 58°      |     |     | 58°       |     |      |        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144M electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                        | TEST CONDITIONS                                                                                     | $T_A^\dagger$ | TLE2144M |             |     | TLE2144AM |             |     | UNIT                         |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------|----------|-------------|-----|-----------|-------------|-----|------------------------------|
|                                                                                  |                                                                                                     |               | MIN      | TYP         | MAX | MIN       | TYP         | MAX |                              |
| $V_{IO}$ Input offset voltage                                                    | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$<br>$R_S = 50\ \Omega$                             | 25°C          | 0.5      | 3.8         |     | 0.5       | 3           |     | mV                           |
|                                                                                  |                                                                                                     | Full range    |          |             | 5.2 |           |             | 4.4 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                   |                                                                                                     | Full range    |          | 1.7         |     |           | 1.7         |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                    |                                                                                                     | 25°C          | 8        | 100         |     | 8         | 100         |     | nA                           |
|                                                                                  |                                                                                                     | Full range    |          | 250         |     |           | 250         |     |                              |
| $I_{IB}$ Input bias current                                                      |                                                                                                     | 25°C          | –0.8     | –2          |     | –0.8      | –2          |     | $\mu\text{A}$                |
|                                                                                  |                                                                                                     | Full range    |          | –2.3        |     |           | –2.3        |     |                              |
| $V_{ICR}$ Common-mode input voltage range                                        | $R_S = 50\ \Omega$                                                                                  | 25°C          | 0 to 3   | –0.3 to 3.2 |     | 0 to 3    | –0.3 to 3.2 |     | V                            |
|                                                                                  |                                                                                                     | Full range    | 0 to 2.7 | –0.3 to 2.9 |     | 0 to 2.7  | –0.3 to 2.9 |     |                              |
| $V_{OH}$ High-level output voltage                                               | $I_{OH} = -150\ \mu\text{A}$                                                                        | 25°C          | 3.9      | 4.1         |     | 3.9       | 4.1         |     | V                            |
|                                                                                  | $I_{OH} = -1.5\text{ mA}$                                                                           |               | 3.8      | 4           |     | 3.8       | 4           |     |                              |
|                                                                                  | $I_{OH} = -15\text{ mA}$                                                                            |               | 3.4      | 3.7         |     | 3.4       | 3.7         |     |                              |
|                                                                                  | $I_{OH} = 100\ \mu\text{A}$                                                                         | Full range    | 3.75     |             |     | 3.75      |             |     |                              |
|                                                                                  | $I_{OH} = 1\text{ mA}$                                                                              |               | 3.65     |             |     | 3.65      |             |     |                              |
|                                                                                  | $I_{OH} = 10\text{ mA}$                                                                             |               | 3.45     |             |     | 3.45      |             |     |                              |
| $V_{OL}$ Low-level output voltage                                                | $I_{OL} = 150\ \mu\text{A}$                                                                         | 25°C          | 75       | 125         |     | 75        | 125         |     | mV                           |
|                                                                                  | $I_{OL} = 1.5\ \mu\text{A}$                                                                         |               | 150      | 225         |     | 150       | 225         |     |                              |
|                                                                                  | $I_{OL} = 15\text{ mA}$                                                                             |               | 1.2      | 1.6         |     | 1.2       | 1.6         |     | V                            |
|                                                                                  | $I_{OL} = 100\ \mu\text{A}$                                                                         | Full range    | 200      |             |     | 200       |             |     | mV                           |
|                                                                                  | $I_{OL} = 1\text{ mA}$                                                                              |               | 250      |             |     | 250       |             |     |                              |
|                                                                                  | $I_{OL} = 10\text{ mA}$                                                                             |               | 1.45     |             |     | 1.45      |             |     | V                            |
| $A_{VD}$ Large-signal differential voltage amplification                         | $V_{IC} = \pm 2.5\text{ V}$ ,<br>$R_L = 2\text{ k}\Omega$ ,<br>$V_O = 1\text{ V to } -1.5\text{ V}$ | 25°C          | 50       | 95          |     | 50        | 95          |     | V/mV                         |
|                                                                                  |                                                                                                     | Full range    | 5        |             |     | 5         |             |     |                              |
| $r_i$ Input resistance                                                           |                                                                                                     | 25°C          | 70       |             |     | 70        |             |     | $\text{M}\Omega$             |
| $c_i$ Input capacitance                                                          |                                                                                                     | 25°C          | 2.5      |             |     | 2.5       |             |     | pF                           |
| $z_o$ Open-loop output impedance                                                 | $f = 1\text{ MHz}$                                                                                  | 25°C          | 30       |             |     | 30        |             |     | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                 | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                                          | 25°C          | 85       | 118         |     | 85        | 118         |     | dB                           |
|                                                                                  |                                                                                                     | Full range    | 80       |             |     | 80        |             |     |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC} \pm / \Delta V_{IO}$ ) | $V_{CC} \pm = \pm 2.5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$                         | 25°C          | 90       | 106         |     | 90        | 106         |     | dB                           |
|                                                                                  |                                                                                                     | Full range    | 85       |             |     | 85        |             |     |                              |
| $I_{CC}$ Supply current                                                          | $V_O = 2.5\text{ V}$ ,<br>$V_{IC} = 2.5\text{ V}$ No load,                                          | 25°C          | 13.2     | 17.6        |     | 13.2      | 17.6        |     | mA                           |
|                                                                                  |                                                                                                     | Full range    | 18.4     |             |     | 18.4      |             |     |                              |

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144M operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                      |          | TLE2144M |      | TLE2144AM |        | UNIT   |
|--------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------|----------|----------|------|-----------|--------|--------|
|                    |                                             |                                                                                                      |          | MIN      | TYP  | MAX       | MIN    |        |
| SR +               | Positive slew rate                          | A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ <sup>†</sup> ,<br>C <sub>L</sub> = 500 pF                |          | 45       |      | 45        |        | V/μs   |
| SR −               | Negative slew rate                          |                                                                                                      |          | 42       |      | 42        |        |        |
| t <sub>S</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>2.5-V step                                                                  | To 0.1%  | 0.16     |      | 0.16      |        | μs     |
|                    |                                             |                                                                                                      | To 0.01% | 0.22     |      | 0.22      |        |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, f = 10 Hz                                                                     | 15       |          | 15   |           | nV/√Hz |        |
|                    |                                             | R <sub>S</sub> = 20 Ω, f = 1 kHz                                                                     | 10.5     |          | 10.5 |           |        |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                   |          | 0.48     |      | 0.48      |        | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                  |          | 0.51     |      | 0.51      |        |        |
| I <sub>n</sub>     | Equivalent input noise current              | f = 10 Hz                                                                                            |          | 1.92     |      | 1.92      |        | pA/√Hz |
|                    |                                             | f = 1 kHz                                                                                            |          | 0.5      |      | 0.5       |        |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = 1 V to 3 V, R <sub>L</sub> = 2 kΩ <sup>†</sup> ,<br>A <sub>VD</sub> = 2, f = 10 kHz |          | 0.0052%  |      | 0.0052%   |        |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | R <sub>L</sub> = 2 kΩ <sup>†</sup> , C <sub>L</sub> = 100 pF                                         | 5.9      |          | 5.9  |           | MHz    |        |
|                    | Gain-bandwidth product                      | R <sub>L</sub> = 2 kΩ <sup>†</sup> , C <sub>L</sub> = 100 pF,<br>f = 100 kHz                         | 5.8      |          | 5.8  |           | MHz    |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V, R <sub>L</sub> = 2 kΩ <sup>†</sup> ,<br>A <sub>VD</sub> = 1                | 660      |          | 660  |           | kHz    |        |
| φ <sub>m</sub>     | Phase margin                                | R <sub>L</sub> = 2 kΩ <sup>†</sup> , C <sub>L</sub> = 100 pF                                         | 57°      |          | 57°  |           |        |        |

$^\dagger R_L$  terminates at 2.5 V

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$ | TLE2144M    |               |     | TLE2144AM   |               |     | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|---------------|-------------|---------------|-----|-------------|---------------|-----|------------------|
|                                                                                 |                                                          |               | MIN         | TYP           | MAX | MIN         | TYP           | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, R_S = 50 \Omega$                            | 25°C          | 0.6         | 2.4           |     | 0.5         | 1.5           |     | mV               |
|                                                                                 |                                                          | Full range    |             |               | 4   |             |               | 3.2 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | Full range    | 1.7         |               |     | 1.7         |               |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C          | 7           | 100           |     | 7           | 100           |     | nA               |
|                                                                                 |                                                          | Full range    |             | 250           |     |             | 250           |     |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C          | -0.7        | -1.5          |     | -0.7        | -1.5          |     | $\mu A$          |
|                                                                                 |                                                          | Full range    |             | -1.8          |     |             | -1.8          |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                        | 25°C          | -15 to 13   | -15.3 to 13.2 |     | -15 to 13   | -15.3 to 13.2 |     | V                |
|                                                                                 |                                                          | Full range    | -15 to 12.7 | -15.3 to 12.9 |     | -15 to 12.7 | -15.3 to 12.9 |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150 \mu A$                                       | 25°C          | 13.8        | 14.1          |     | 13.8        | 14.1          |     | V                |
|                                                                                 | $I_O = -1.5$ mA                                          |               | 13.7        | 14            |     | 13.7        | 14            |     |                  |
|                                                                                 | $I_O = -15$ mA                                           |               | 13.1        | 13.7          |     | 13.1        | 13.7          |     |                  |
|                                                                                 | $I_O = -100 \mu A$                                       | Full range    | 13.7        |               |     | 13.7        |               |     |                  |
|                                                                                 | $I_O = -1$ mA                                            |               | 13.6        |               |     | 13.6        |               |     |                  |
|                                                                                 | $I_O = -10$ mA                                           |               | 13.1        |               |     | 13.1        |               |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150 \mu A$                                        | 25°C          | -14.7       | -14.9         |     | -14.7       | -14.9         |     | V                |
|                                                                                 | $I_O = 1.5$ mA                                           |               | -14.5       | -14.8         |     | -14.5       | -14.8         |     |                  |
|                                                                                 | $I_O = 15$ mA                                            |               | -13.4       | -13.8         |     | -13.4       | -13.8         |     |                  |
|                                                                                 | $I_O = 100 \mu A$                                        | Full range    | -14.6       |               |     | -14.6       |               |     |                  |
|                                                                                 | $I_O = 1$ mA                                             |               | -14.5       |               |     | -14.5       |               |     |                  |
|                                                                                 | $I_O = 10$ mA                                            |               | -13.4       |               |     | -13.4       |               |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10$ V, $R_L = 2$ k $\Omega$                   | 25°C          | 100         | 170           |     | 100         | 170           |     | V/mV             |
|                                                                                 |                                                          | Full range    | 20          |               |     | 20          |               |     |                  |
| $r_i$ Input resistance                                                          |                                                          | 25°C          | 65          |               |     | 65          |               |     | M $\Omega$       |
| $c_i$ Input capacitance                                                         |                                                          | 25°C          | 2.5         |               |     | 2.5         |               |     | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                              | 25°C          | 30          |               |     | 30          |               |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                   | 25°C          | 85          | 108           |     | 85          | 108           |     | dB               |
|                                                                                 |                                                          | Full range    | 80          |               |     | 80          |               |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C          | 90          | 106           |     | 90          | 106           |     | dB               |
|                                                                                 |                                                          | Full range    | 85          |               |     | 85          |               |     |                  |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                | 25°C          | -25         | -50           |     | -25         | -50           |     | mA               |
|                                                                                 |                                                          |               | 20          | 31            |     | 20          | 31            |     |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0, V_{IC} = 2.5$ V No load,                       | 25°C          | 13.8        | 18            |     | 13.8        | 18            |     | mA               |
|                                                                                 |                                                          | Full range    |             | 18.8          |     |             | 18.8          |     |                  |

$^\dagger$  Full range is -55°C to 125°C



**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144M operating characteristics,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |                                             | TEST CONDITIONS                                     |                                                     | TLE2144M |            |     | TLE2144AM |            |     | UNIT                   |
|-------------|---------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|----------|------------|-----|-----------|------------|-----|------------------------|
|             |                                             |                                                     |                                                     | MIN      | TYP        | MAX | MIN       | TYP        | MAX |                        |
| SR+         | Positive slew rate                          | $R_L = 2\text{ k}\Omega$ ,<br>$C_L = 100\text{ pF}$ | $A_{VD} = -1$ ,                                     | 27       | 45         |     | 27        | 45         |     | V/ $\mu\text{s}$       |
| SR–         | Negative slew rate                          |                                                     |                                                     | 27       | 42         |     | 27        | 42         |     |                        |
| $t_s$       | Settling time                               | $A_{VD} = -1$ ,<br>10-V step                        | To 0.1%                                             |          | 0.34       |     |           | 0.34       |     | $\mu\text{s}$          |
|             |                                             |                                                     | To 0.01%                                            |          | .4         |     |           | .4         |     |                        |
| $V_n$       | Equivalent input noise voltage              | $R_S = 20\text{ }\Omega$ ,                          | $f = 10\text{ Hz}$                                  |          | 15         |     |           | 15         |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $R_S = 20\text{ }\Omega$ ,                          | $f = 1\text{ kHz}$                                  |          | 10.5       |     |           | 10.5       |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                  |                                                     |          | 0.48       |     |           | 0.48       |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                 |                                                     |          | 0.51       |     |           | 0.51       |     |                        |
| $I_n$       | Equivalent input noise current              | $f = 10\text{ Hz}$                                  |                                                     |          | 1.89       |     |           | 1.89       |     | pA/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 10\text{ kHz}$                                 |                                                     |          | 0.47       |     |           | 0.47       |     |                        |
| THD + N     | Total harmonic distortion plus noise        | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 10$ ,      | $R_L = 2\text{ k}\Omega$ ,<br>$f = 10\text{ kHz}$   |          | 0.01%      |     |           | 0.01%      |     |                        |
| $B_1$       | Unity-gain bandwidth                        | $R_L = 2\text{ k}\Omega$ ,                          | $C_L = 100\text{ pF}$                               |          | 6          |     |           | 6          |     | MHz                    |
|             | Gain-bandwidth product                      | $R_L = 2\text{ k}\Omega$ ,<br>$f = 100\text{ kHz}$  | $C_L = 100\text{ pF}$ ,                             |          | 5.9        |     |           | 5.9        |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 20\text{ V}$ ,<br>$A_{VD} = 1$ ,       | $R_L = 2\text{ k}\Omega$ ,<br>$C_L = 100\text{ pF}$ |          | 668        |     |           | 668        |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 2\text{ k}\Omega$ ,                          | $C_L = 100\text{ pF}$                               |          | $58^\circ$ |     |           | $58^\circ$ |     |                        |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED

## PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2141Y electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                               | TLE2141Y                |                     |      | UNIT             |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------|---------------------|------|------------------|
|                                                                               |                                                                               | MIN                     | TYP                 | MAX  |                  |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0$ , $R_S = 50\ \Omega$ ,<br>$V_O = 0$                              |                         | 200                 | 1000 | $\mu\text{V}$    |
| $I_{IO}$ Input offset current                                                 |                                                                               |                         | 7                   | 100  | nA               |
| $I_{IB}$ Input bias current                                                   |                                                                               |                         | -0.7                | -1.5 | $\mu\text{A}$    |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50\ \Omega$                                                            | -15<br>to<br>13         | -15.3<br>to<br>13.2 |      | V                |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $I_O = -150\ \mu\text{A}$                                                     | 13.8                    | 14.1                |      | V                |
|                                                                               | $I_O = -1.5\ \text{mA}$                                                       | 13.7                    | 14                  |      |                  |
|                                                                               | $I_O = -15\ \text{mA}$                                                        | 13.3                    | 13.7                |      |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $I_O = 150\ \mu\text{A}$                                                      | -14.7                   | -14.9               |      | V                |
|                                                                               | $I_O = 1.5\ \text{mA}$                                                        | -14.5                   | -14.8               |      |                  |
|                                                                               | $I_O = 15\ \text{mA}$                                                         | -13.4                   | -13.8               |      |                  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10\ \text{V}$ , $R_L = 2\ \text{k}\Omega$                          | 100                     | 450                 |      | V/mV             |
| $r_i$ Input resistance                                                        |                                                                               |                         | 65                  |      | $\text{M}\Omega$ |
| $c_i$ Input capacitance                                                       |                                                                               |                         | 2.5                 |      | pF               |
| $z_o$ Open-loop output impedance                                              | $f = 1\ \text{MHz}$                                                           |                         | 30                  |      | $\Omega$         |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                    | 80                      | 108                 |      | dB               |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\ \text{V}$ to $\pm 15\ \text{V}$ ,<br>$R_S = 50\ \Omega$ | 85                      | 106                 |      | dB               |
| $I_{OS}$ Short-circuit output current                                         | $V_O = 0$                                                                     | $V_{ID} = 1\ \text{V}$  | -25                 | -50  | mA               |
|                                                                               |                                                                               | $V_{ID} = -1\ \text{V}$ | 20                  | 31   |                  |
| $I_{CC}$ Supply current                                                       | $V_O = 0$ , No load                                                           |                         | 3.5                 | 4.5  | mA               |

**TLE214x, TLE214xA**  
**EXCALIBUR LOW-NOISE HIGH-SPEED**  
**PRECISION OPERATIONAL AMPLIFIERS**

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2142Y electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER |                                                                       | TEST CONDITIONS                                                               | TLE2142Y                |                     |      | UNIT          |
|-----------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------|---------------------|------|---------------|
|           |                                                                       |                                                                               | MIN                     | TYP                 | MAX  |               |
| $V_{IO}$  | Input offset voltage                                                  | $V_{IC} = 0$ ,<br>$V_O = 0$<br>$R_S = 50\ \Omega$                             |                         | 150                 | 875  | $\mu\text{V}$ |
| $I_{IO}$  | Input offset current                                                  |                                                                               |                         | 7                   | 100  | nA            |
| $I_{IB}$  | Input bias current                                                    |                                                                               |                         | -0.7                | -1.5 | $\mu\text{A}$ |
| $V_{ICR}$ | Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                            | -15<br>to<br>13         | -15.3<br>to<br>13.2 |      | V             |
| $V_{OM+}$ | Maximum positive peak output voltage swing                            | $I_O = -150\ \mu\text{A}$                                                     | 13.8                    | 14.1                |      | V             |
|           |                                                                       | $I_O = -1.5\ \text{mA}$                                                       | 13.7                    | 14                  |      |               |
|           |                                                                       | $I_O = -15\ \text{mA}$                                                        | 13.3                    | 13.7                |      |               |
| $V_{OM-}$ | Maximum negative peak output voltage swing                            | $I_O = 150\ \mu\text{A}$                                                      | -14.7                   | -14.9               |      | V             |
|           |                                                                       | $I_O = 1.5\ \text{mA}$                                                        | -14.5                   | -14.8               |      |               |
|           |                                                                       | $I_O = 15\ \text{mA}$                                                         | -13.4                   | -13.8               |      |               |
| $A_{VD}$  | Large-signal differential voltage amplification                       | $V_O = \pm 10\ \text{V}$ , $R_L = 2\ \text{k}\Omega$                          | 100                     | 450                 |      | V/mV          |
| $r_i$     | Input resistance                                                      |                                                                               |                         | 65                  |      | M $\Omega$    |
| $c_i$     | Input capacitance                                                     |                                                                               |                         | 2.5                 |      | pF            |
| $z_o$     | Open-loop output impedance                                            | $f = 1\ \text{MHz}$                                                           |                         | 30                  |      | $\Omega$      |
| CMRR      | Common-mode rejection ratio                                           | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                    | 80                      | 108                 |      | dB            |
| $k_{SVR}$ | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\ \text{V}$ to $\pm 15\ \text{V}$ ,<br>$R_S = 50\ \Omega$ | 85                      | 106                 |      | dB            |
| $I_{OS}$  | Short-circuit output current                                          | $V_O = 0$                                                                     | $V_{ID} = 1\ \text{V}$  | -25                 | -50  | mA            |
|           |                                                                       |                                                                               | $V_{ID} = -1\ \text{V}$ | 20                  | 31   |               |
| $I_{CC}$  | Supply current                                                        | $V_O = 0$ , No load                                                           |                         | 6.9                 | 9    | mA            |

# TLE214x, TLE214xA

## EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

**TLE2144Y electrical characteristics at  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                              | TLE2144Y                |                     |      | UNIT             |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------|---------------------|------|------------------|
|                                                                                 |                                                                              | MIN                     | TYP                 | MAX  |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, \quad V_O = 0 \quad R_S = 50\ \Omega,$                          |                         | 0.3                 | 1.8  | mV               |
| $I_{IO}$ Input offset current                                                   |                                                                              |                         | 7                   | 100  | nA               |
| $I_{IB}$ Input bias current                                                     |                                                                              |                         | -0.7                | -1.5 | $\mu\text{A}$    |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                           | -15<br>to<br>13         | -15.3<br>to<br>13.2 |      | V                |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -150\ \mu\text{A}$                                                    | 13.8                    | 14.1                |      | V                |
|                                                                                 | $I_O = -1.5\ \text{mA}$                                                      | 13.7                    | 14                  |      |                  |
|                                                                                 | $I_O = -15\ \text{mA}$                                                       | 13.3                    | 13.7                |      |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 150\ \mu\text{A}$                                                     | -14.7                   | -14.9               |      | V                |
|                                                                                 | $I_O = 1.5\ \text{mA}$                                                       | -14.5                   | -14.8               |      |                  |
|                                                                                 | $I_O = 15\ \text{mA}$                                                        | -13.4                   | -13.8               |      |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10\ \text{V}, \quad R_L = 2\ \text{k}\Omega$                      | 100                     | 450                 |      | V/mV             |
| $r_i$ Input resistance                                                          |                                                                              |                         | 65                  |      | $\text{M}\Omega$ |
| $c_i$ Input capacitance                                                         |                                                                              |                         | 2.5                 |      | pF               |
| $z_o$ Open-loop output impedance                                                | $f = 1\ \text{MHz}$                                                          |                         | 30                  |      | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, \quad R_S = 50\ \Omega$                                | 80                      | 108                 |      | dB               |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 2.5\ \text{V to } \pm 15\ \text{V}, \quad R_S = 50\ \Omega$ | 85                      | 106                 |      | dB               |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                                    | $V_{ID} = 1\ \text{V}$  | -25                 | -50  | mA               |
|                                                                                 |                                                                              | $V_{ID} = -1\ \text{V}$ | 20                  | 31   |                  |
| $I_{CC}$ Supply current                                                         | $V_O = 0, \quad \text{No load}$                                              |                         | 13.8                | 18   | mA               |

## TYPICAL CHARACTERISTICS

**Table of Graphs**


|                |                                                 |                                                                                       | FIGURE             |
|----------------|-------------------------------------------------|---------------------------------------------------------------------------------------|--------------------|
| $V_{IO}$       | Input offset voltage                            | Distribution                                                                          | 1, 2, 3            |
| $I_{IO}$       | Input offset current                            | vs Free-air temperature                                                               | 4                  |
| $I_{IB}$       | Input bias current                              | vs Common-mode input voltage<br>vs Free-air temperature                               | 5<br>6             |
| $V_{OM+}$      | Maximum positive peak output voltage            | vs Supply voltage<br>vs Free-air temperature<br>vs Output current<br>vs Settling time | 7<br>8<br>9<br>11  |
| $V_{OM-}$      | Maximum negative peak output voltage            | vs Supply voltage<br>vs Free-air temperature<br>vs Output current<br>vs Settling time | 7<br>8<br>10<br>11 |
| $V_{O(PP)}$    | Maximum peak-to-peak output voltage             | vs Frequency                                                                          | 12                 |
| $V_{OH}$       | High-level output voltage                       | vs Output current                                                                     | 13                 |
| $V_{OL}$       | Low-level output voltage                        | vs Output current                                                                     | 14                 |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Frequency<br>vs Free-air temperature                                               | 15<br>16           |
| $z_o$          | Closed-loop output impedance                    | vs Frequency                                                                          | 17                 |
| $I_{OS}$       | Short-circuit output current                    | vs Free-air temperature                                                               | 18                 |
| CMRR           | Common-mode rejection ratio                     | vs Frequency<br>vs Free-air temperature                                               | 19<br>20           |
| $k_{SVR}$      | Supply-voltage rejection ratio                  | vs Frequency<br>vs Free-air temperature                                               | 21<br>22           |
| $I_{CC}$       | Supply current                                  | vs Supply voltage<br>vs Free-air temperature                                          | 23<br>24           |
| $V_n$          | Equivalent input noise voltage                  | vs Frequency                                                                          | 25                 |
| $V_n$          | Input noise voltage                             | Over a 10-second period                                                               | 26                 |
| $I_n$          | Noise current                                   | vs Frequency                                                                          | 27                 |
| THD + N        | Total harmonic distortion plus noise            | vs Frequency                                                                          | 28                 |
| SR             | Slew rate                                       | vs Free-air temperature<br>vs Load capacitance                                        | 29<br>30           |
| Pulse response | Noninverting large signal                       | vs Time                                                                               | 31                 |
|                | Inverting large signal                          | vs Time                                                                               | 32                 |
|                | Small signal                                    | vs Time                                                                               | 33                 |
| $B_1$          | Unity-gain bandwidth                            | vs Load capacitance                                                                   | 34                 |
|                | Gain margin                                     | vs Load capacitance                                                                   | 35                 |
| $\phi_m$       | Phase margin                                    | vs Load capacitance                                                                   | 36                 |
|                | Phase shift                                     | vs Frequency                                                                          | 15                 |

# TLE214x, TLE214xA EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006


## TYPICAL CHARACTERISTICS

**TLE2141  
DISTRIBUTION OF  
INPUT OFFSET VOLTAGE**

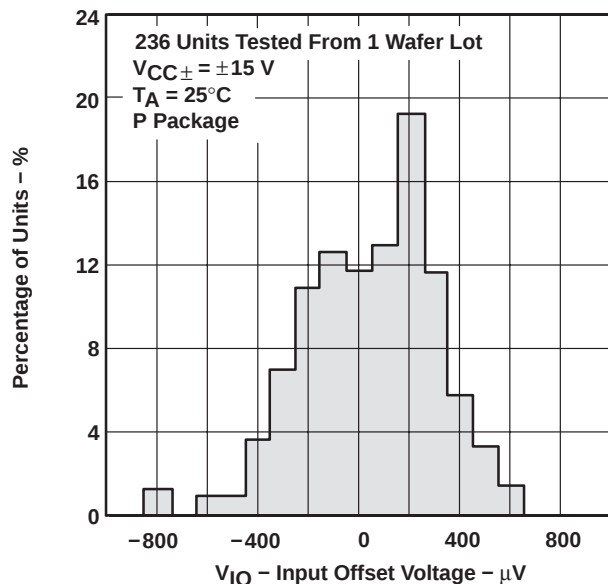


**Figure 1**

**TLE2142  
DISTRIBUTION OF  
INPUT OFFSET VOLTAGE**

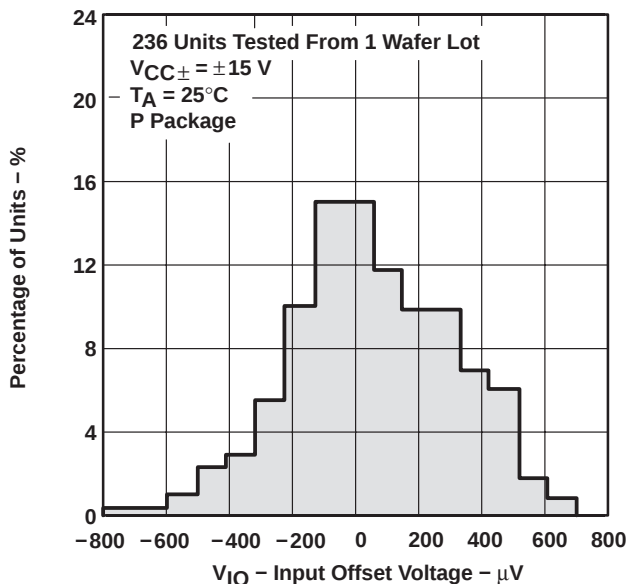


**Figure 2**

**TLE2144  
DISTRIBUTION OF  
INPUT OFFSET VOLTAGE**

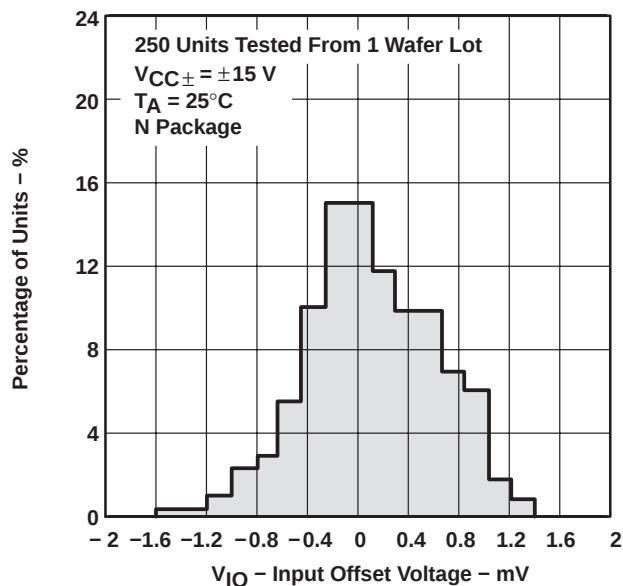

**Figure 3**





**INPUT OFFSET CURRENT<sup>†</sup>  
VS  
FREE-AIR TEMPERATURE**

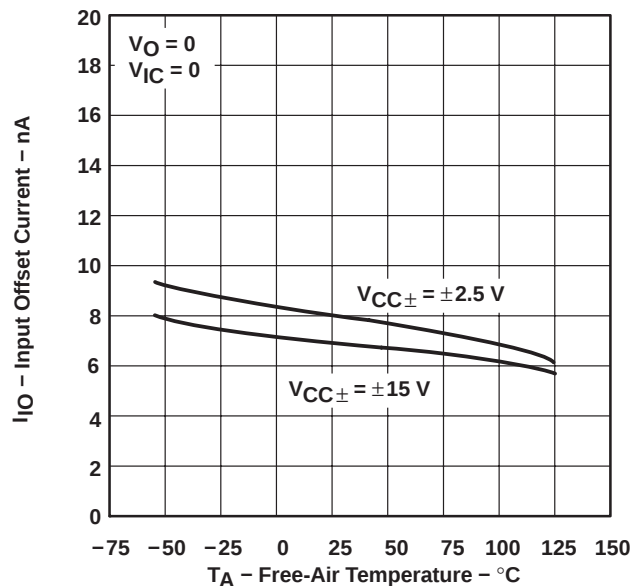

**Figure 4**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

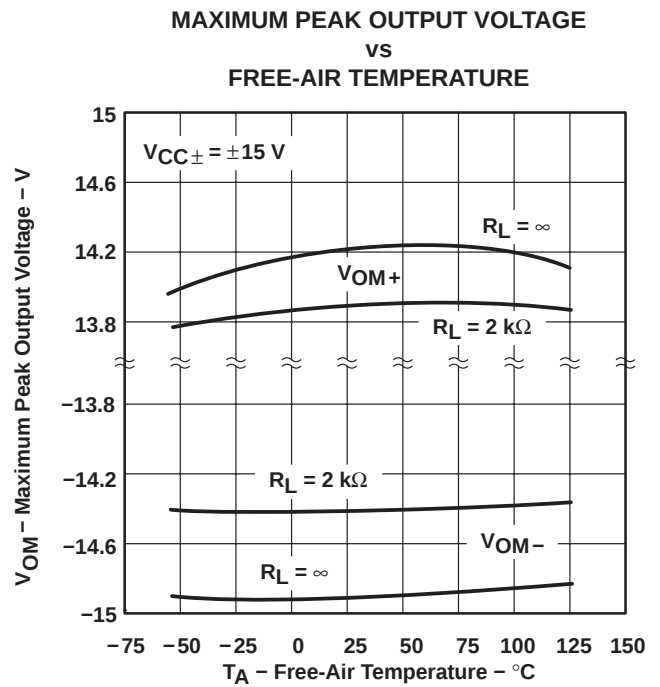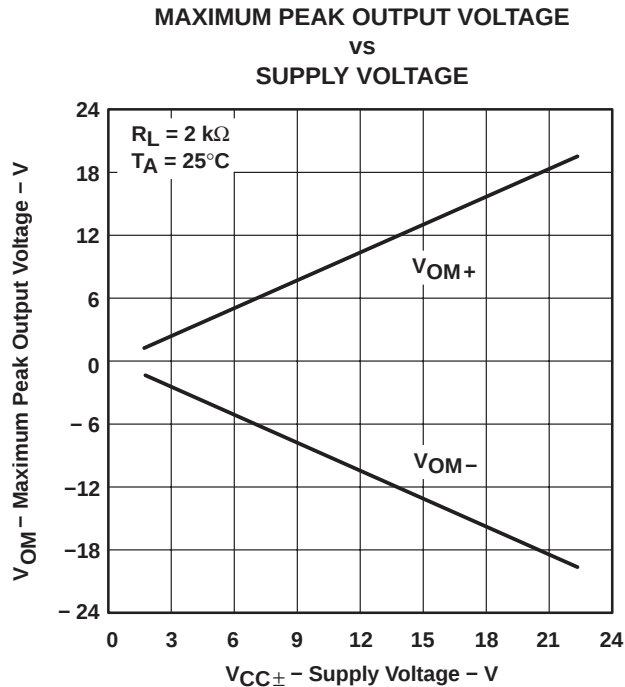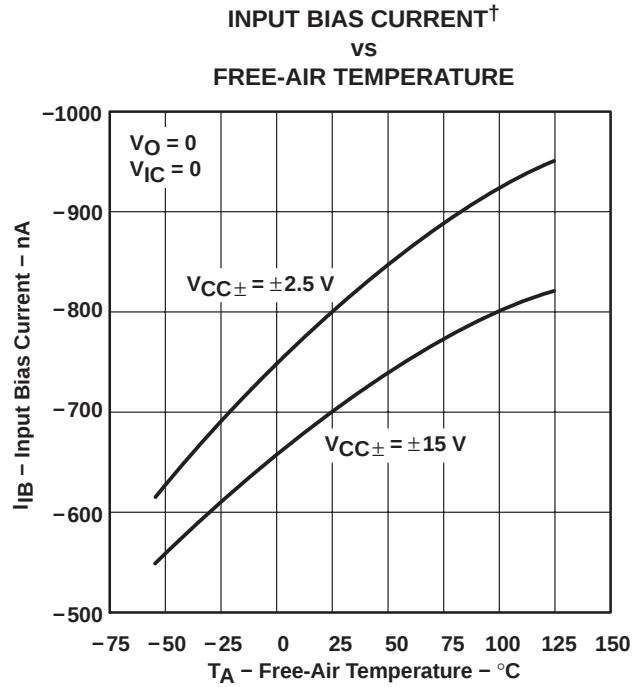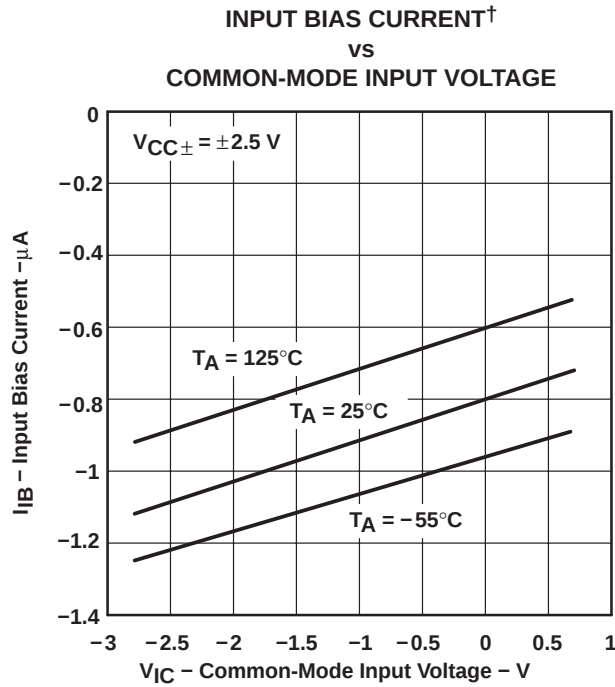

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE214x, TLE214xA EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

## TYPICAL CHARACTERISTICS

MAXIMUM POSITIVE PEAK  
OUTPUT VOLTAGE<sup>†</sup>  
VS  
OUTPUT CURRENT

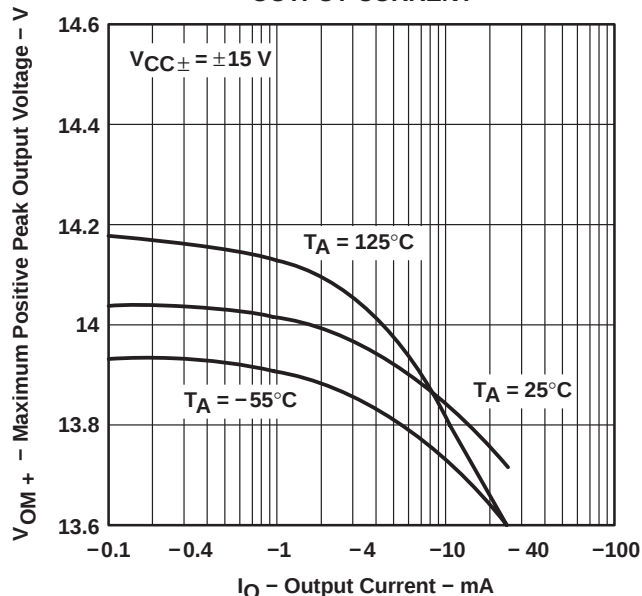


Figure 9

MAXIMUM NEGATIVE PEAK  
OUTPUT VOLTAGE<sup>†</sup>  
VS  
OUTPUT CURRENT

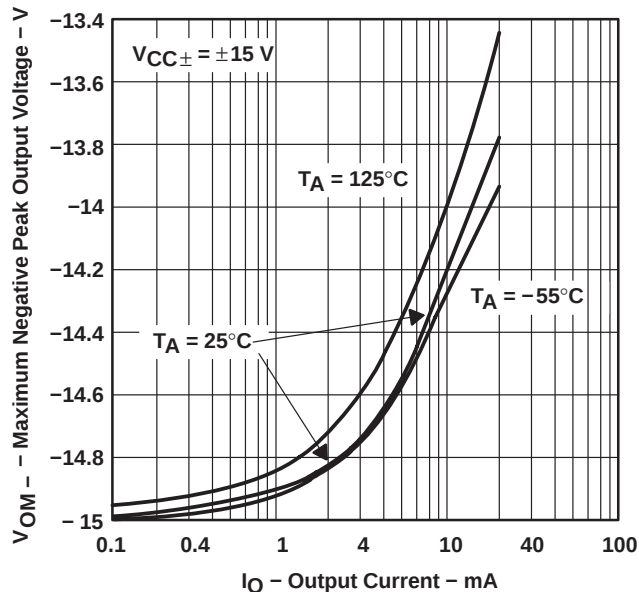


Figure 10

MAXIMUM PEAK OUTPUT VOLTAGE  
VS  
SETTLING TIME

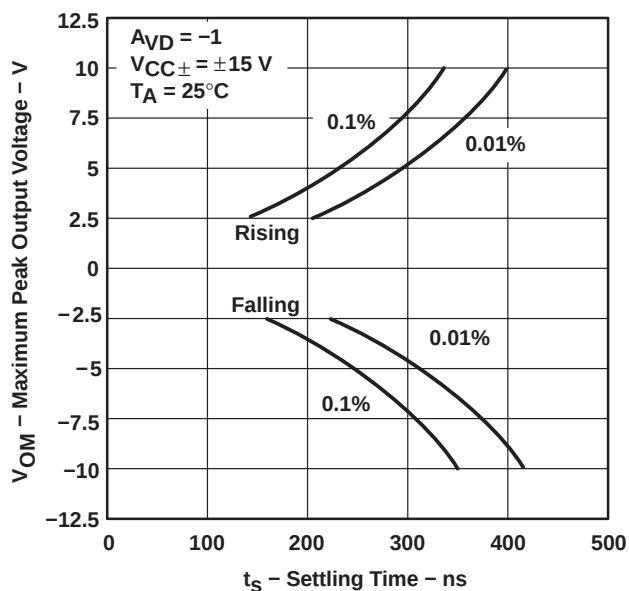


Figure 11

MAXIMUM PEAK-TO-PEAK  
OUTPUT VOLTAGE<sup>†</sup>  
VS  
FREQUENCY



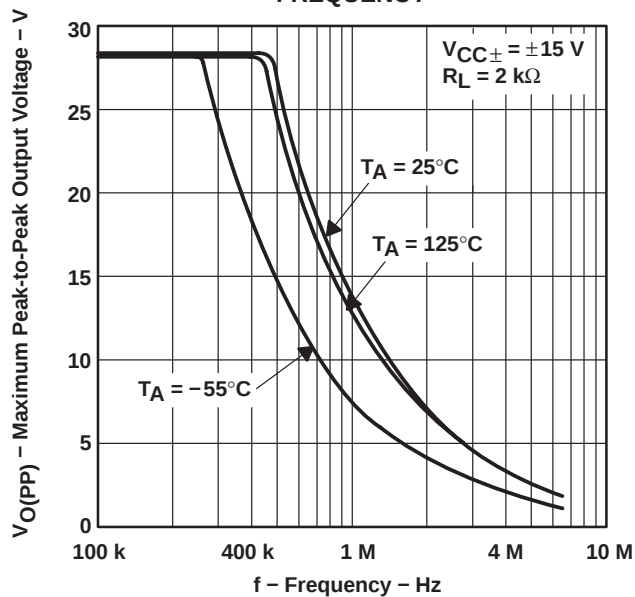



Figure 12

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

### TYPICAL CHARACTERISTICS

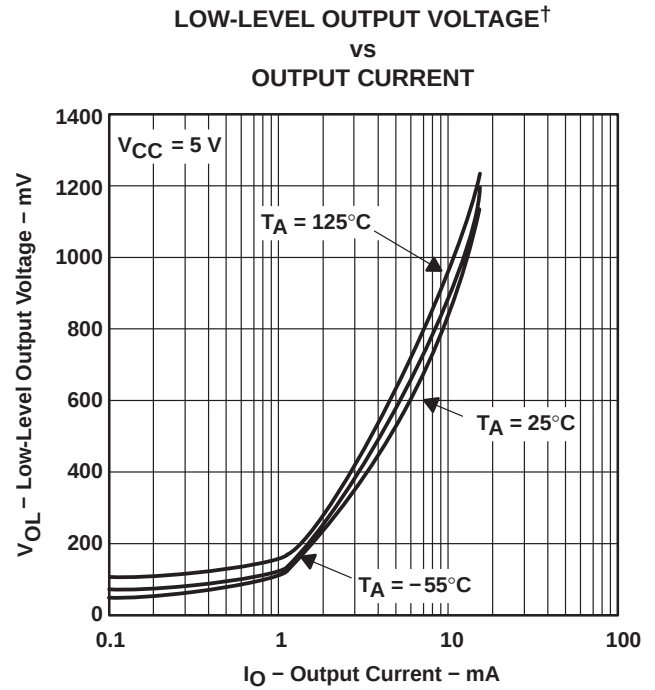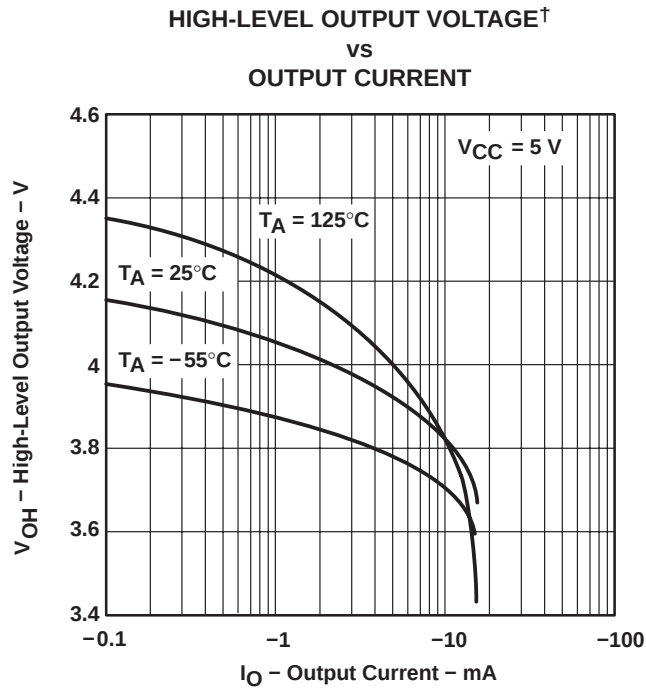

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT VS FREQUENCY

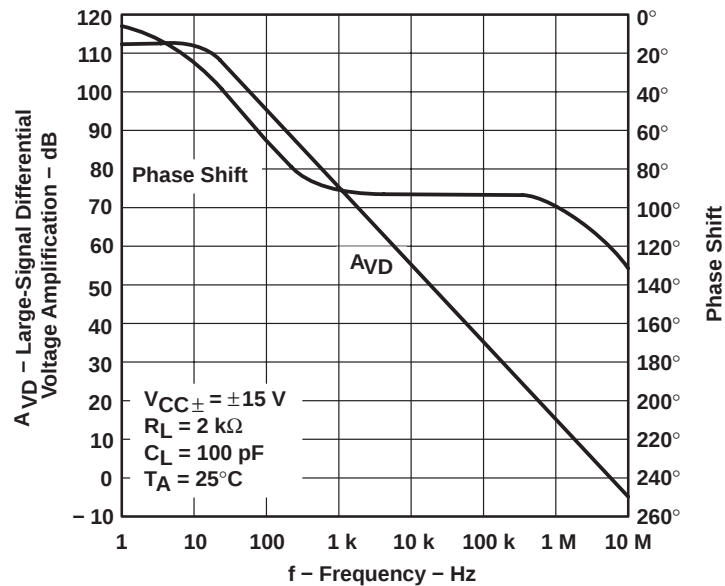

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE214x, TLE214xA EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

## TYPICAL CHARACTERISTICS

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION<sup>†</sup>

VS

FREE-AIR TEMPERATURE

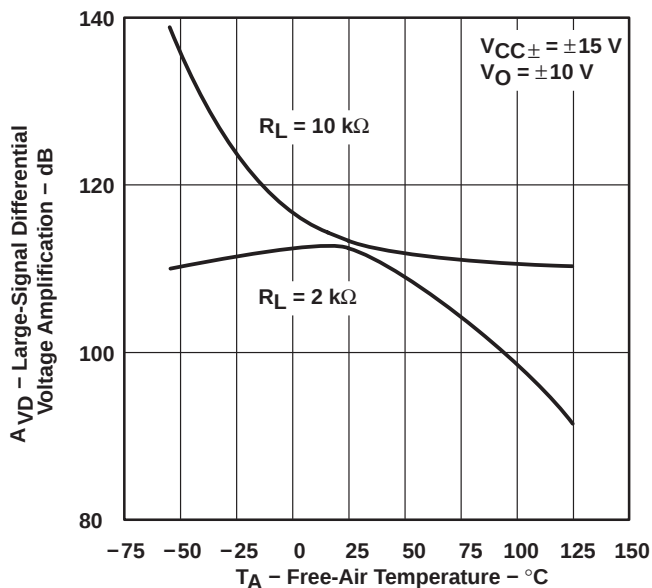


Figure 16

### CLOSED-LOOP OUTPUT IMPEDANCE

VS

FREQUENCY

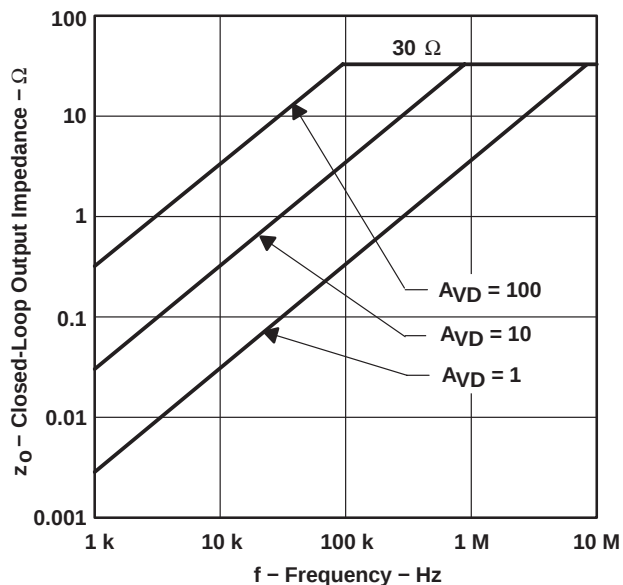


Figure 17

### SHORT-CIRCUIT OUTPUT CURRENT<sup>†</sup>

VS

FREE-AIR TEMPERATURE

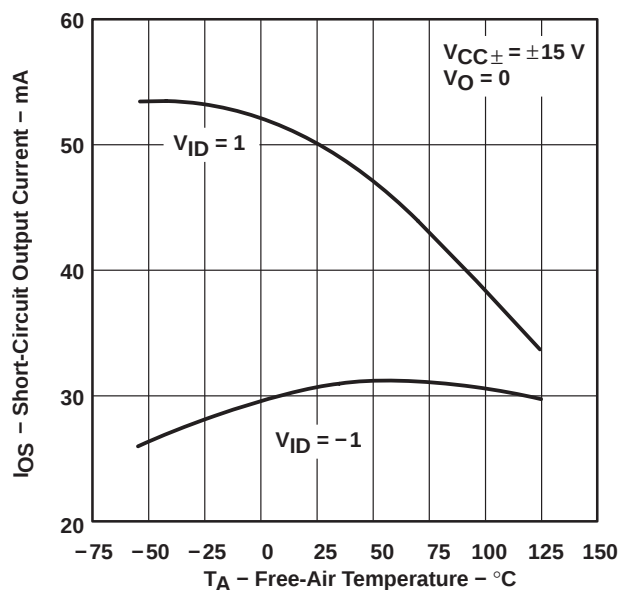


Figure 18

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

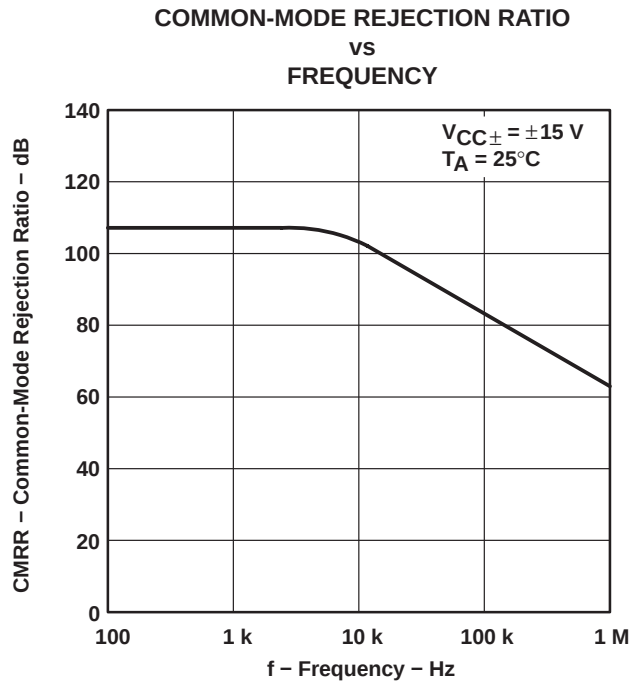


Figure 19

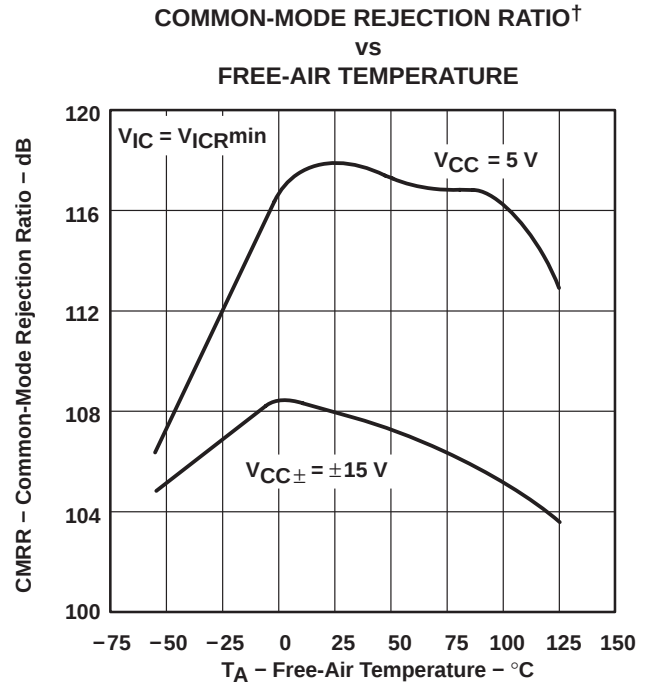


Figure 20

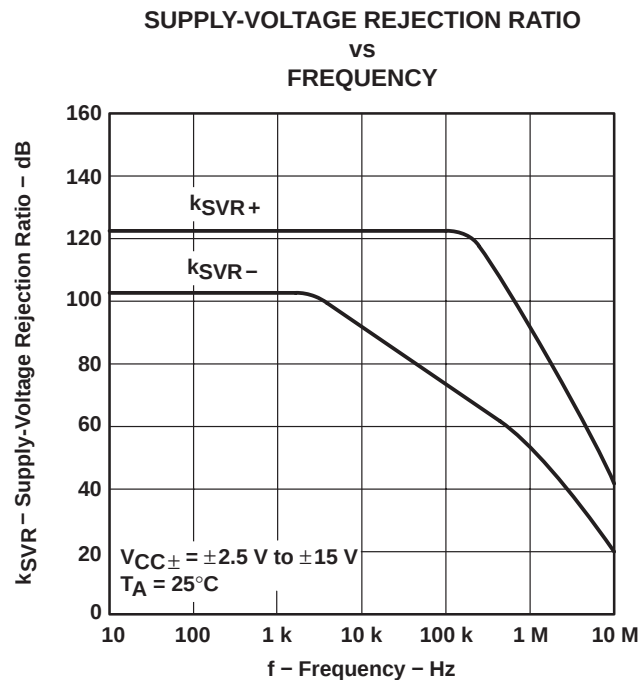


Figure 21

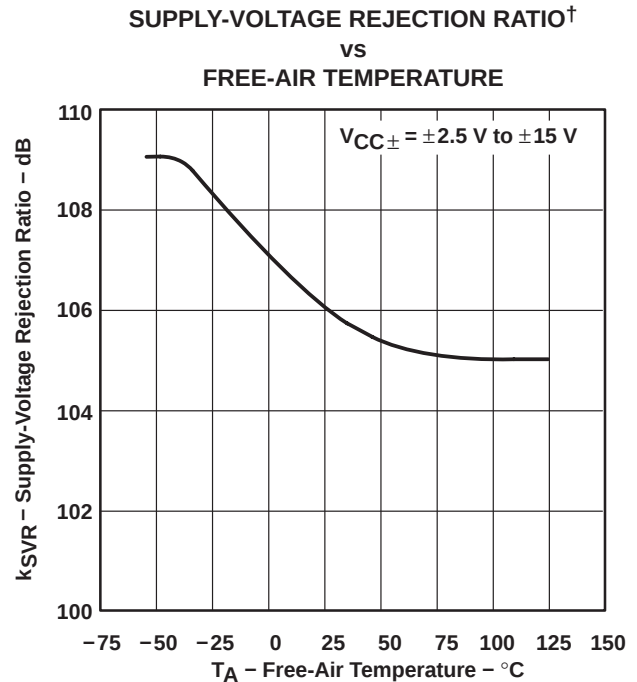


Figure 22

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE214x, TLE214xA EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

## TYPICAL CHARACTERISTICS

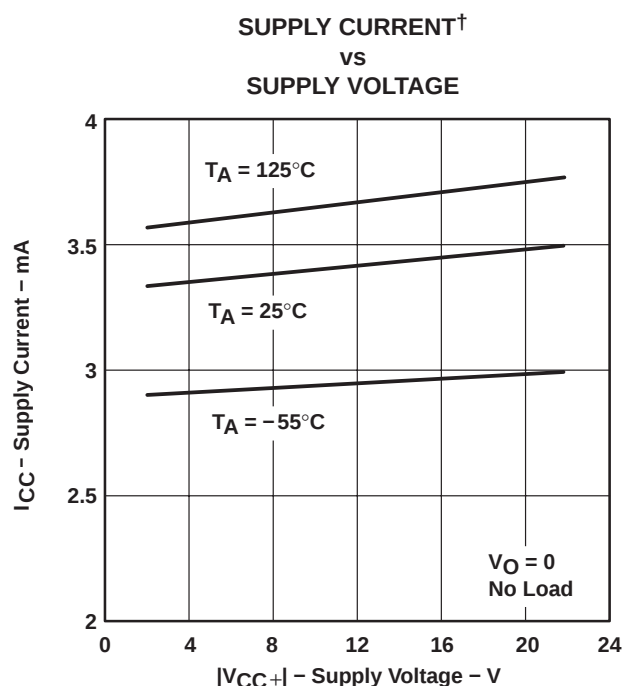


Figure 23

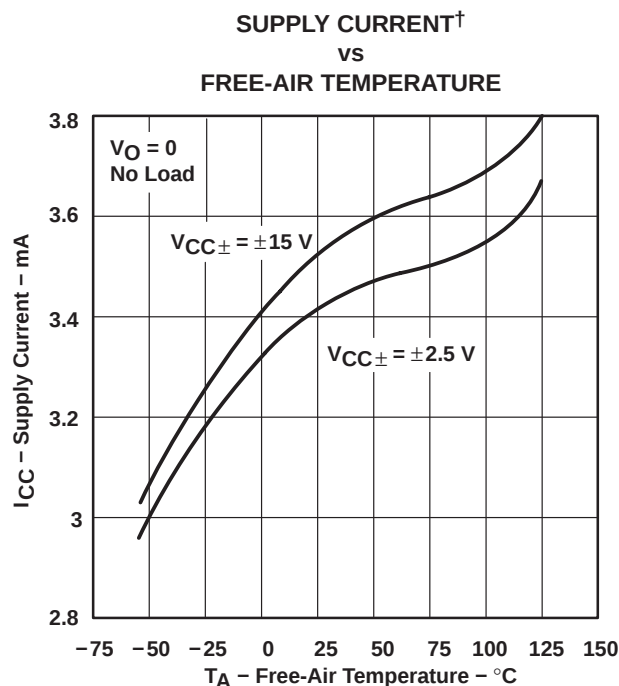


Figure 24

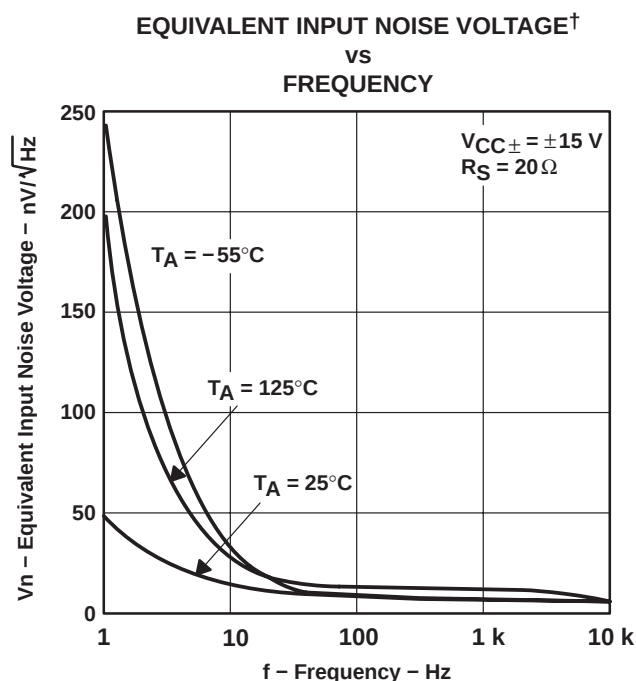


Figure 25





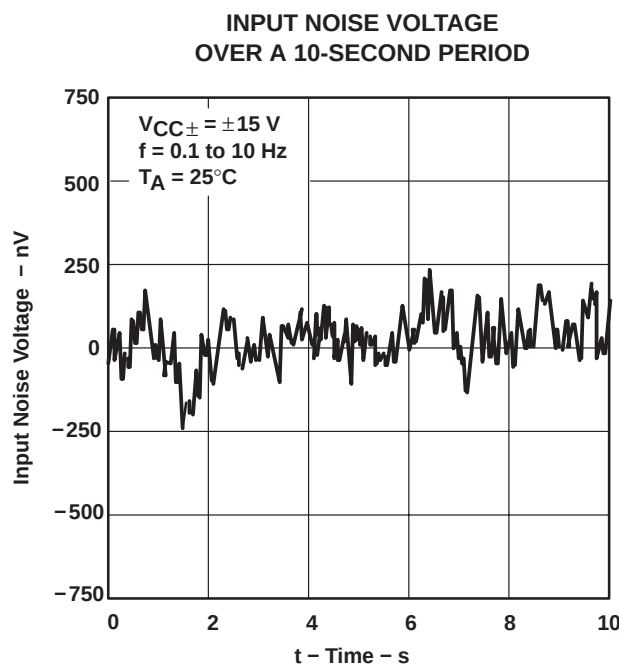


Figure 26

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

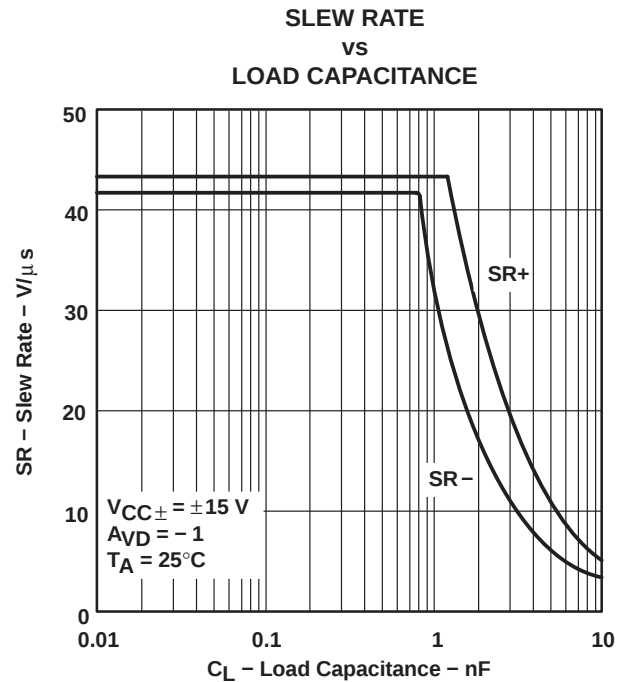
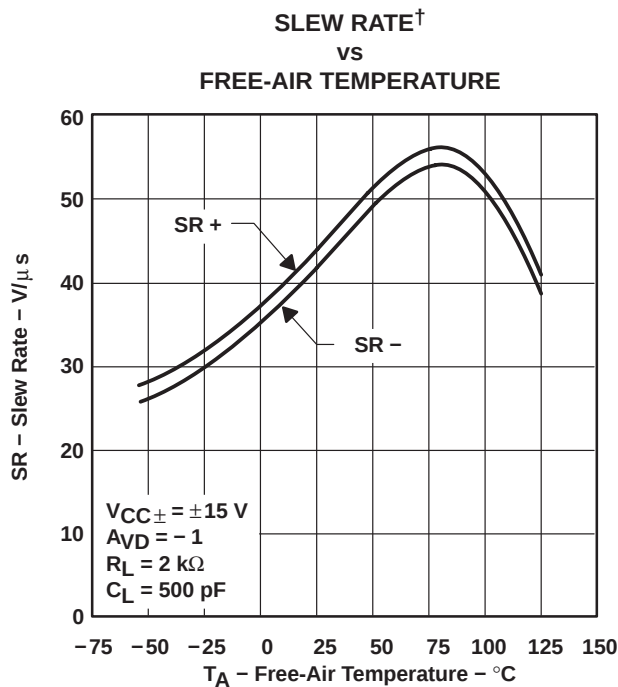
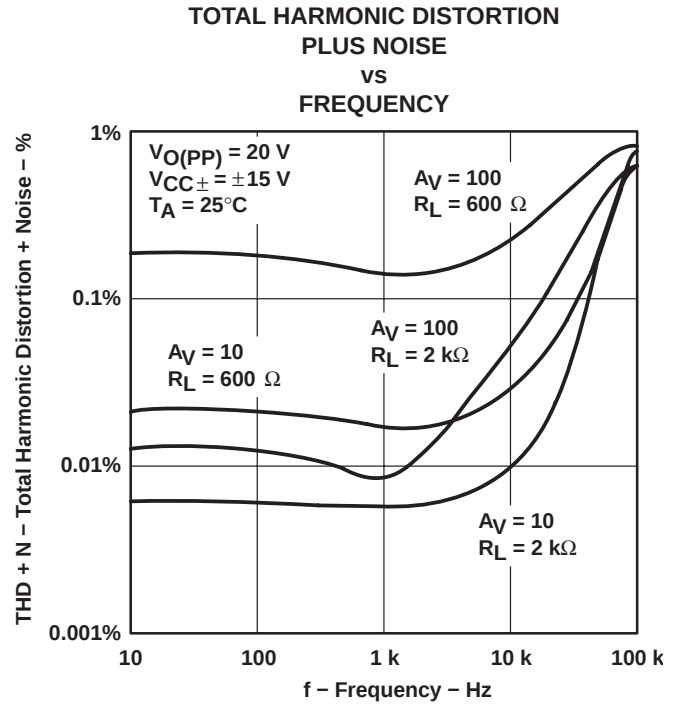
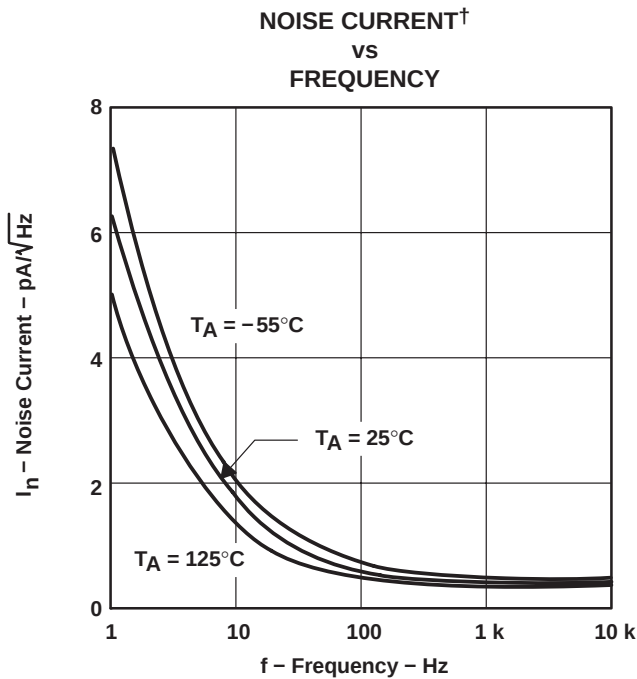


<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE214x, TLE214xA EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

## TYPICAL CHARACTERISTICS

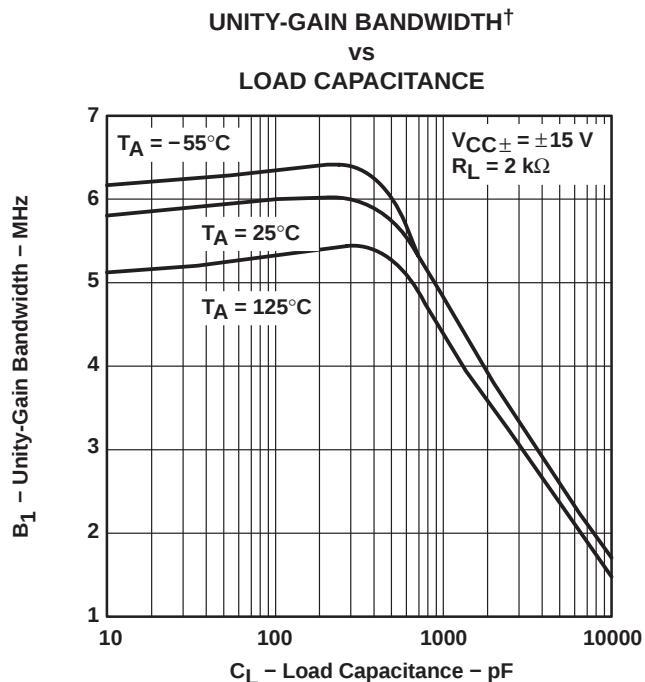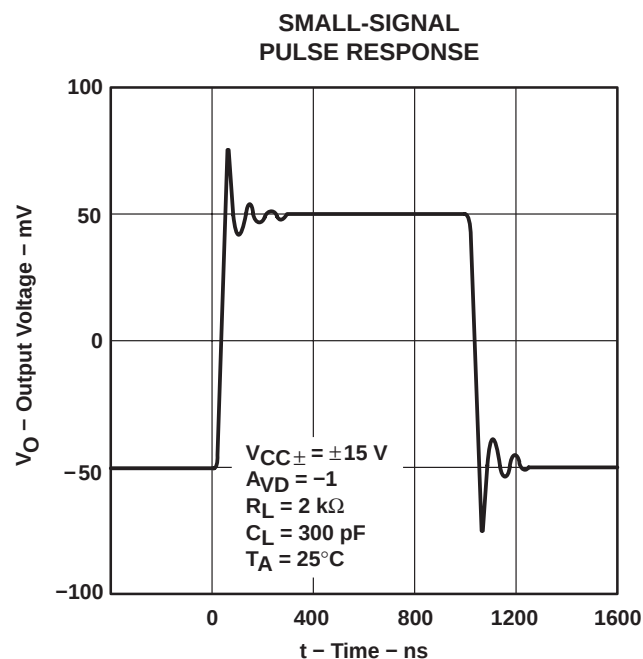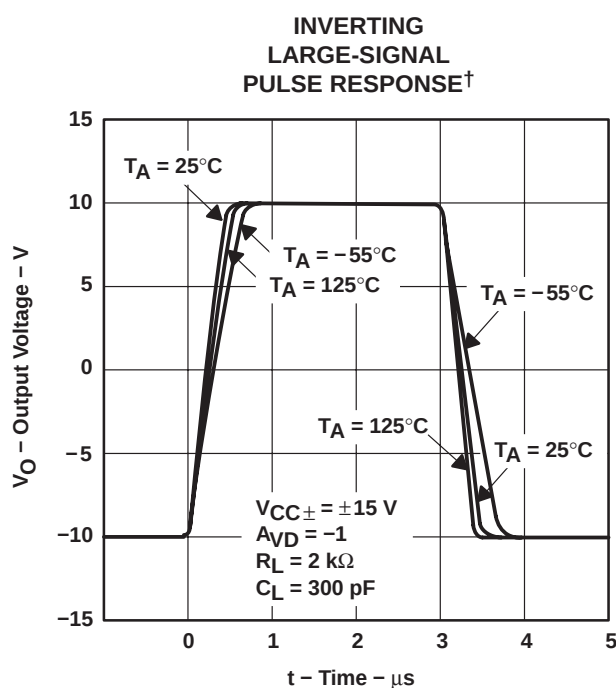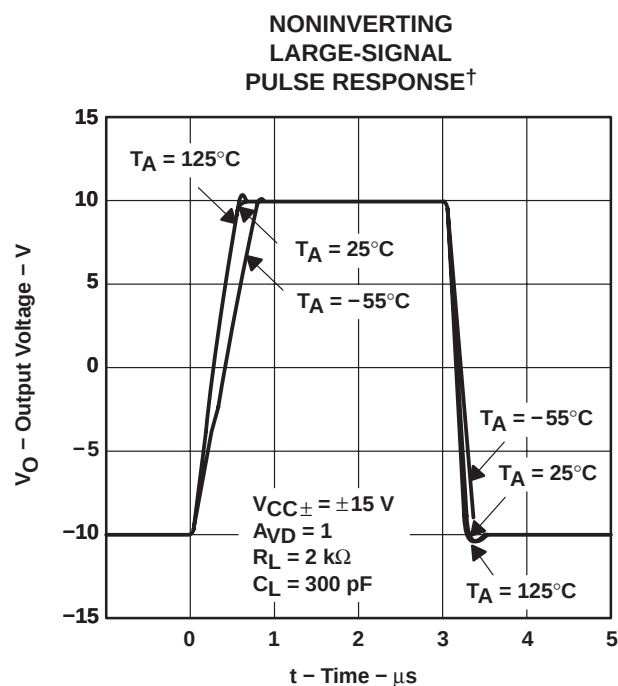

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

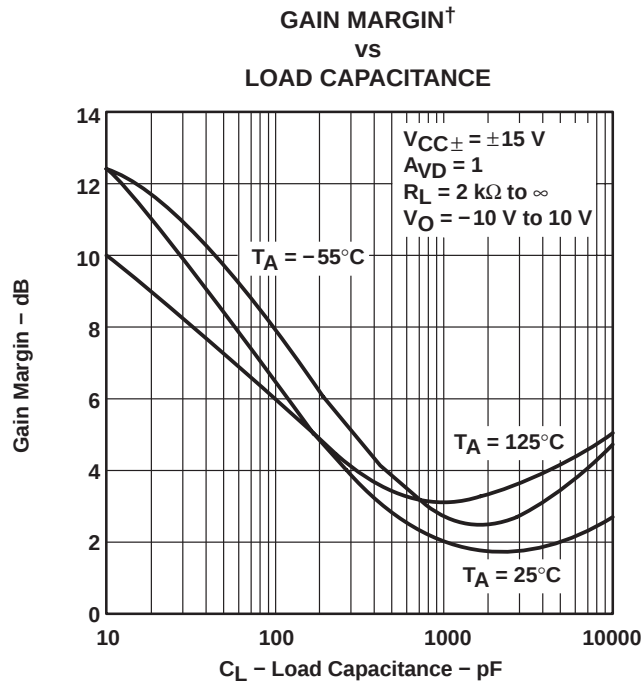


Figure 35

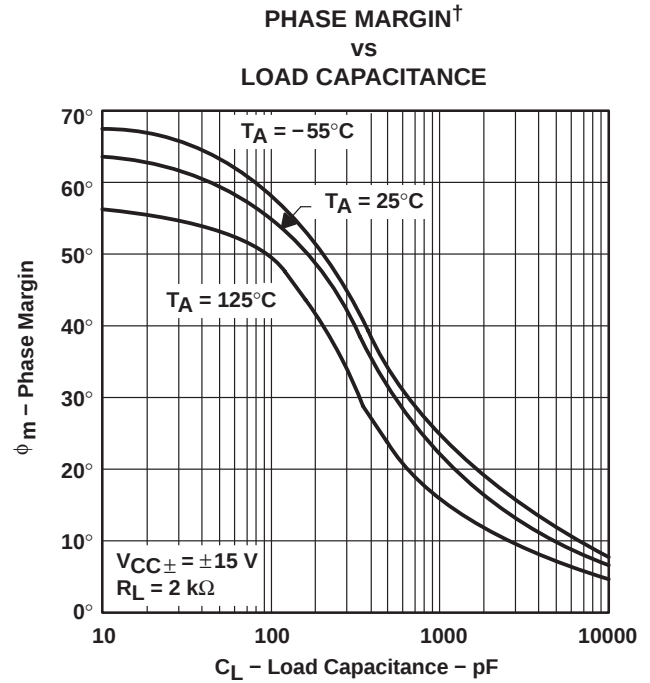


Figure 36

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE214x, TLE214xA EXCALIBUR LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS183C – FEBRUARY 1997 – REVISED JUNE 2006

## APPLICATION INFORMATION

### input offset voltage nulling

The TLE2141 series offers external null pins that can be used to further reduce the input offset voltage. If this feature is desired, connect the circuit of Figure 37 as shown. If external nulling is not needed, the null pins may be left unconnected.

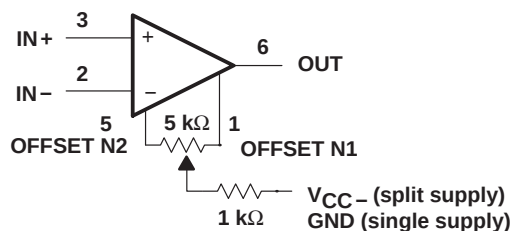


Figure 37. Input Offset Voltage Null Circuit

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| 5962-9321603Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 5962-9321603QHA  | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 5962-9321603QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 5962-9321604Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 5962-9321604QHA  | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 5962-9321604QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 5962-9321605Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 5962-9321605QCA  | ACTIVE                | CDIP         | J               | 14   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 5962-9321606Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 5962-9321606QCA  | ACTIVE                | CDIP         | J               | 14   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2141ACD       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141ACDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141ACP       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141ACPE4     | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141AID       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141AIDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141AIDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141AIDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141AIP       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141AIPe4     | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141CD        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141CDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141CDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141CP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141CPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141IDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLE2141IDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2141IP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141IPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2141MD        | ACTIVE                | SOIC         | D               | 8    | 75          | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2141MDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2142ACD       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142ACDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142ACDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142ACDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142ACP       | OBSOLETE              | PDIP         | P               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TLE2142AID       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142AIDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142AIDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142AIDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142AIP       | OBSOLETE              | PDIP         | P               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TLE2142AMD       | ACTIVE                | SOIC         | D               | 8    | 75          | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2142AMDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142AMDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2142AMDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142AMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| TLE2142AMJG      | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2142AMJGB     | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2142AMUB      | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2142CD        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142CDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLE2142CDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLE2142CP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2142CPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2142CPWLE     | OBSOLETE              | TSSOP        | PW              | 16   |             | TBD                     | Call TI          | Call TI                      |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLE2142CPWR      | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142CPWRG4    | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142IDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLE2142IDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLE2142IP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2142IPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2142MD        | ACTIVE                | SOIC         | D               | 8    | 75          | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2142MDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142MDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2142MDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2142MFKB      | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| TLE2142MJGB      | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2142MUB       | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2144ACN       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144ACNE4     | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144AIN       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144AINE4     | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144AMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| TLE2144AMJB      | ACTIVE                | CDIP         | J               | 14   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2144CDW       | ACTIVE                | SOIC         | DW              | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144CDWG4     | ACTIVE                | SOIC         | DW              | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144CDWR      | ACTIVE                | SOIC         | DW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144CDWRG4    | ACTIVE                | SOIC         | DW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144CN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144CNE4      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144IDW       | ACTIVE                | SOIC         | DW              | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144IDWG4     | ACTIVE                | SOIC         | DW              | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| no Sb/Br)        |                       |              |                 |      |             |                         |                  |                              |
| TLE2144IDWR      | ACTIVE                | SOIC         | DW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144IDWRG4    | ACTIVE                | SOIC         | DW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144IN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144INE4      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLE2144MDW       | ACTIVE                | SOIC         | DW              | 16   | 40          | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLE2144MDWG4     | ACTIVE                | SOIC         | DW              | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLE2144MFKB      | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| TLE2144MJB       | ACTIVE                | CDIP         | J               | 14   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| TLE2144MN        | OBSOLETE              | PDIP         | N               | 14   |             | TBD                     | Call TI          | Call TI                      |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF TLE2141, TLE2141A, TLE2142, TLE2142A, TLE2142AM, TLE2142M, TLE2144, TLE2144A, TLE2144AM, TLE2144M :**

- Automotive: [TLE2142-Q1](#)
- Enhanced Product: [TLE2141-EP](#), [TLE2144-EP](#)
- Military: [TLE2141M](#), [TLE2141AM](#)

**NOTE: Qualified Version Definitions:**

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product - Supports Defense, Aerospace and Medical Applications
- Military - QML certified for Military and Defense Applications


**TAPE AND REEL INFORMATION**

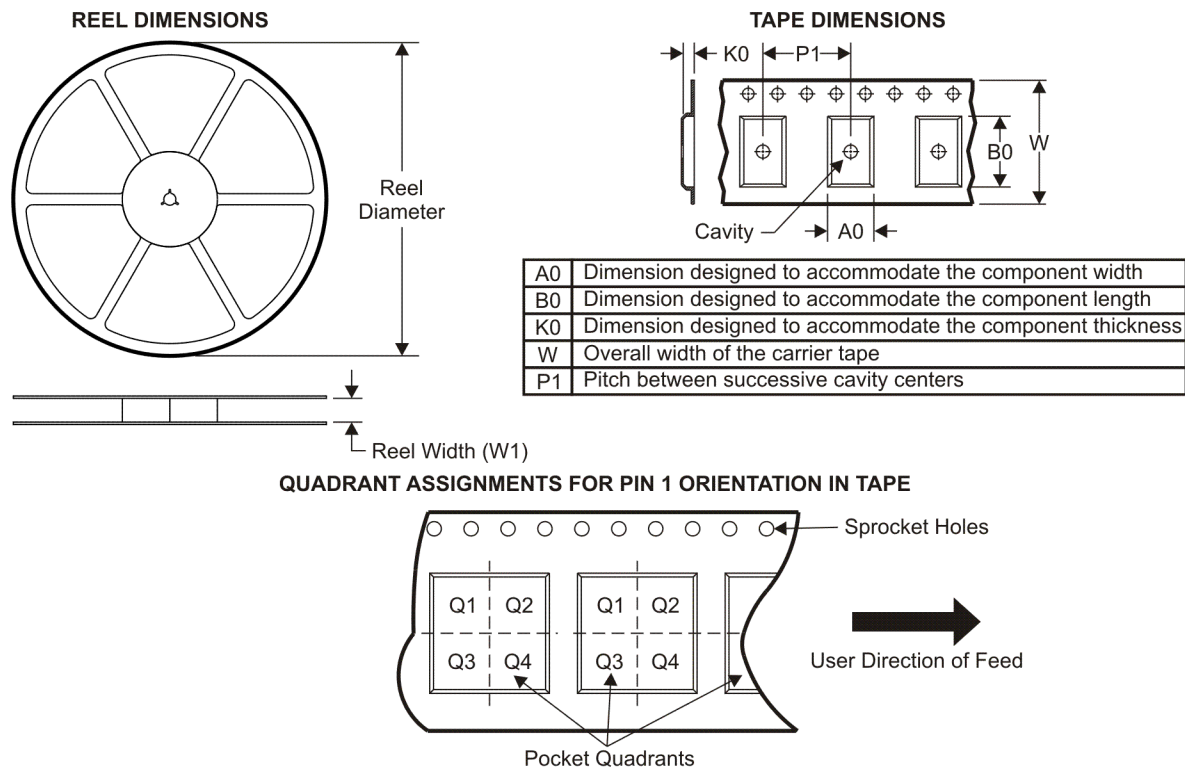

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLE2141AIDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2141CDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2141IDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2142ACDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2142AIDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2142CDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2142CPWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 7.0     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLE2142IDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLE2144CDWR | SOIC         | DW              | 16   | 2000 | 330.0              | 16.4               | 10.75   | 10.7    | 2.7     | 12.0    | 16.0   | Q1            |
| TLE2144IDWR | SOIC         | DW              | 16   | 2000 | 330.0              | 16.4               | 10.75   | 10.7    | 2.7     | 12.0    | 16.0   | Q1            |

**TAPE AND REEL BOX DIMENSIONS**

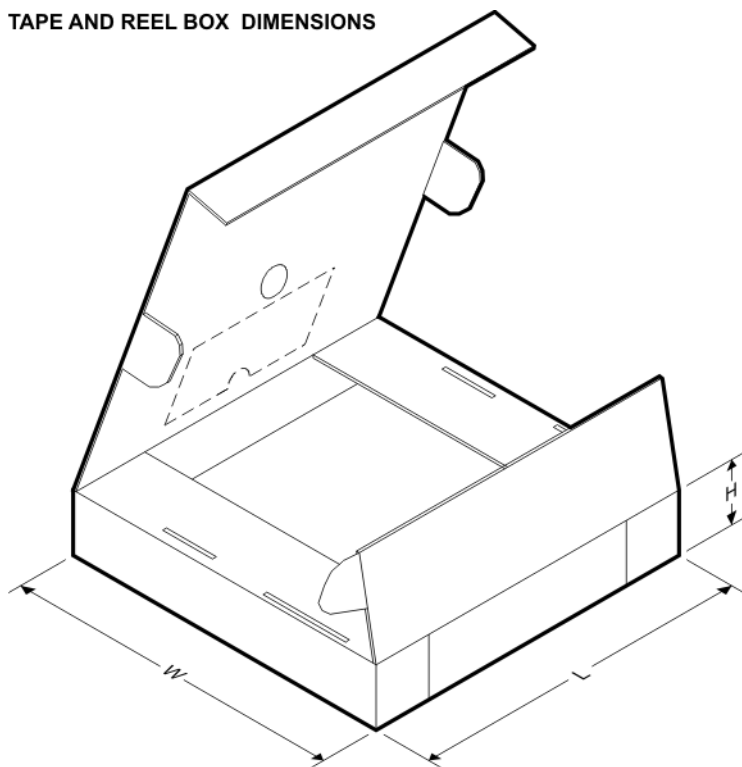


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLE2141AIDR | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2141CDR  | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2141IDR  | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2142ACDR | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2142AIDR | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2142CDR  | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2142CPWR | TSSOP        | PW              | 16   | 2000 | 346.0       | 346.0      | 29.0        |
| TLE2142IDR  | SOIC         | D               | 8    | 2500 | 346.0       | 346.0      | 29.0        |
| TLE2144CDWR | SOIC         | DW              | 16   | 2000 | 346.0       | 346.0      | 33.0        |
| TLE2144IDWR | SOIC         | DW              | 16   | 2000 | 346.0       | 346.0      | 33.0        |

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

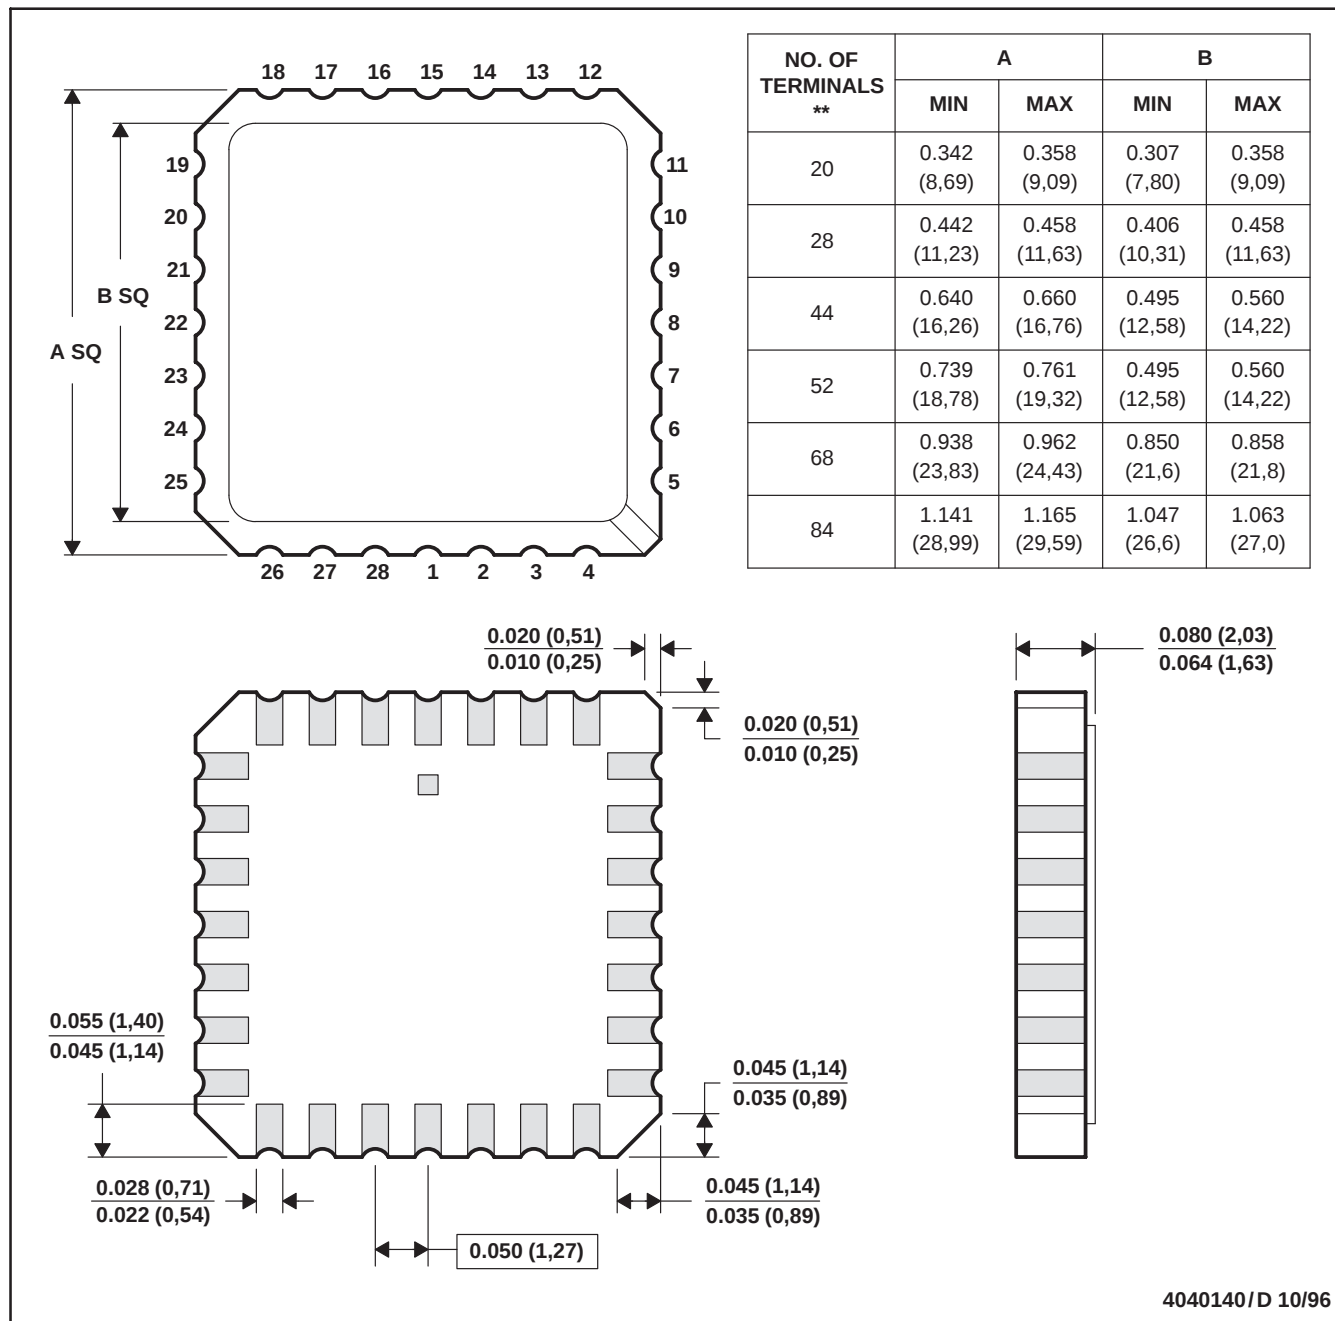


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a metal lid.
  - D. The terminals are gold plated.
  - E. Falls within JEDEC MS-004


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

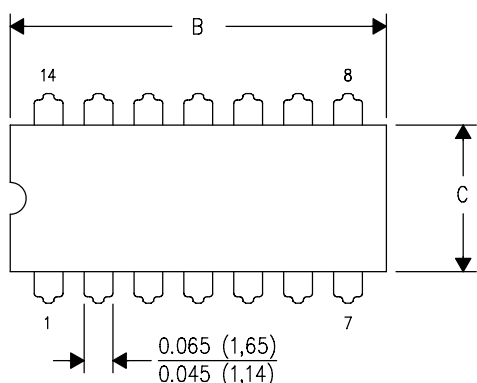

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

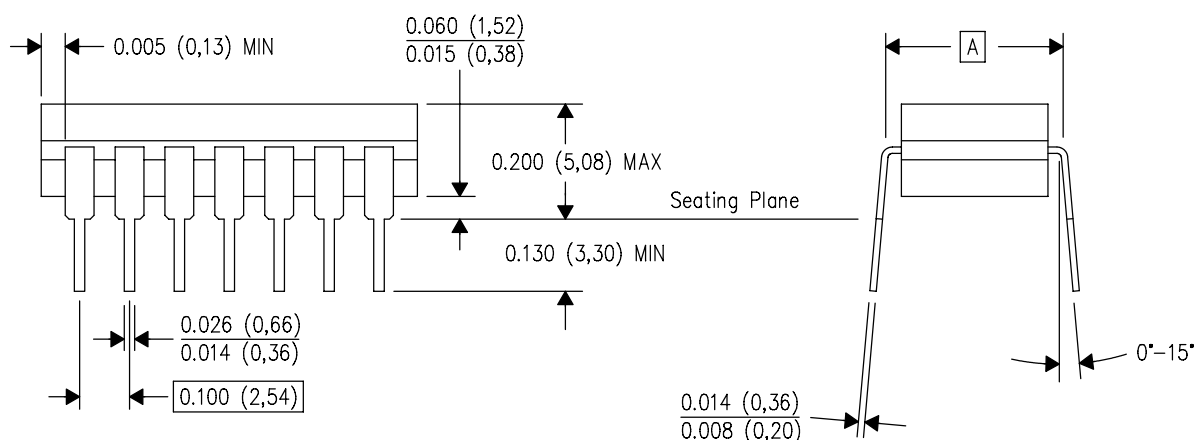


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## PW (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE


14 PINS SHOWN

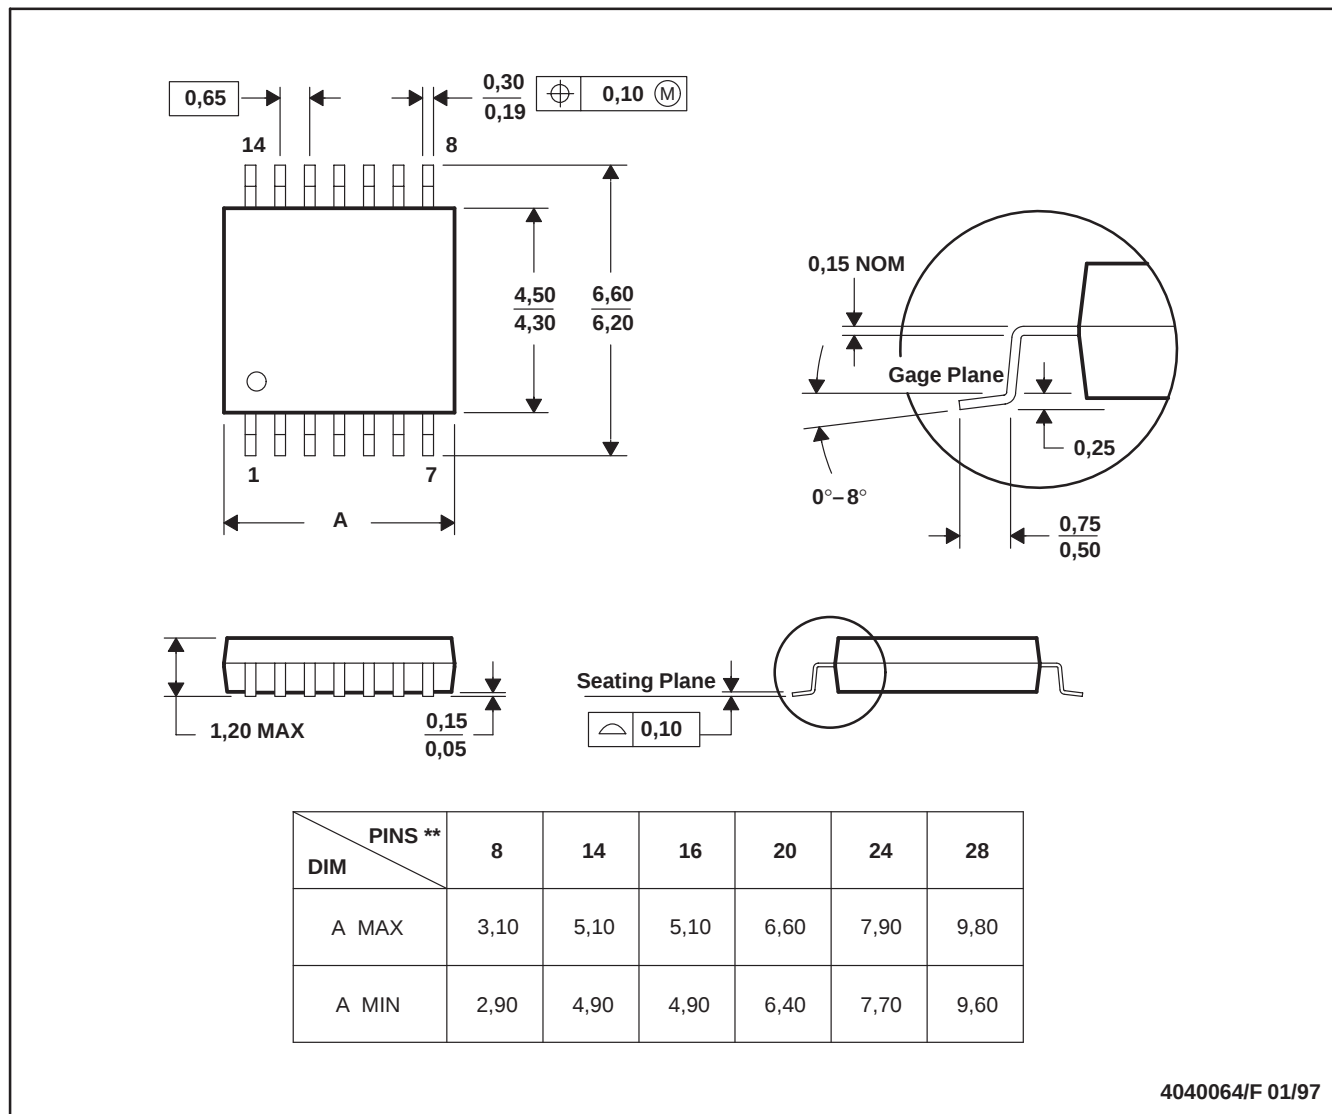

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153

## D (R-PDSO-G8)

# PLASTIC SMALL-OUTLINE PACKAGE

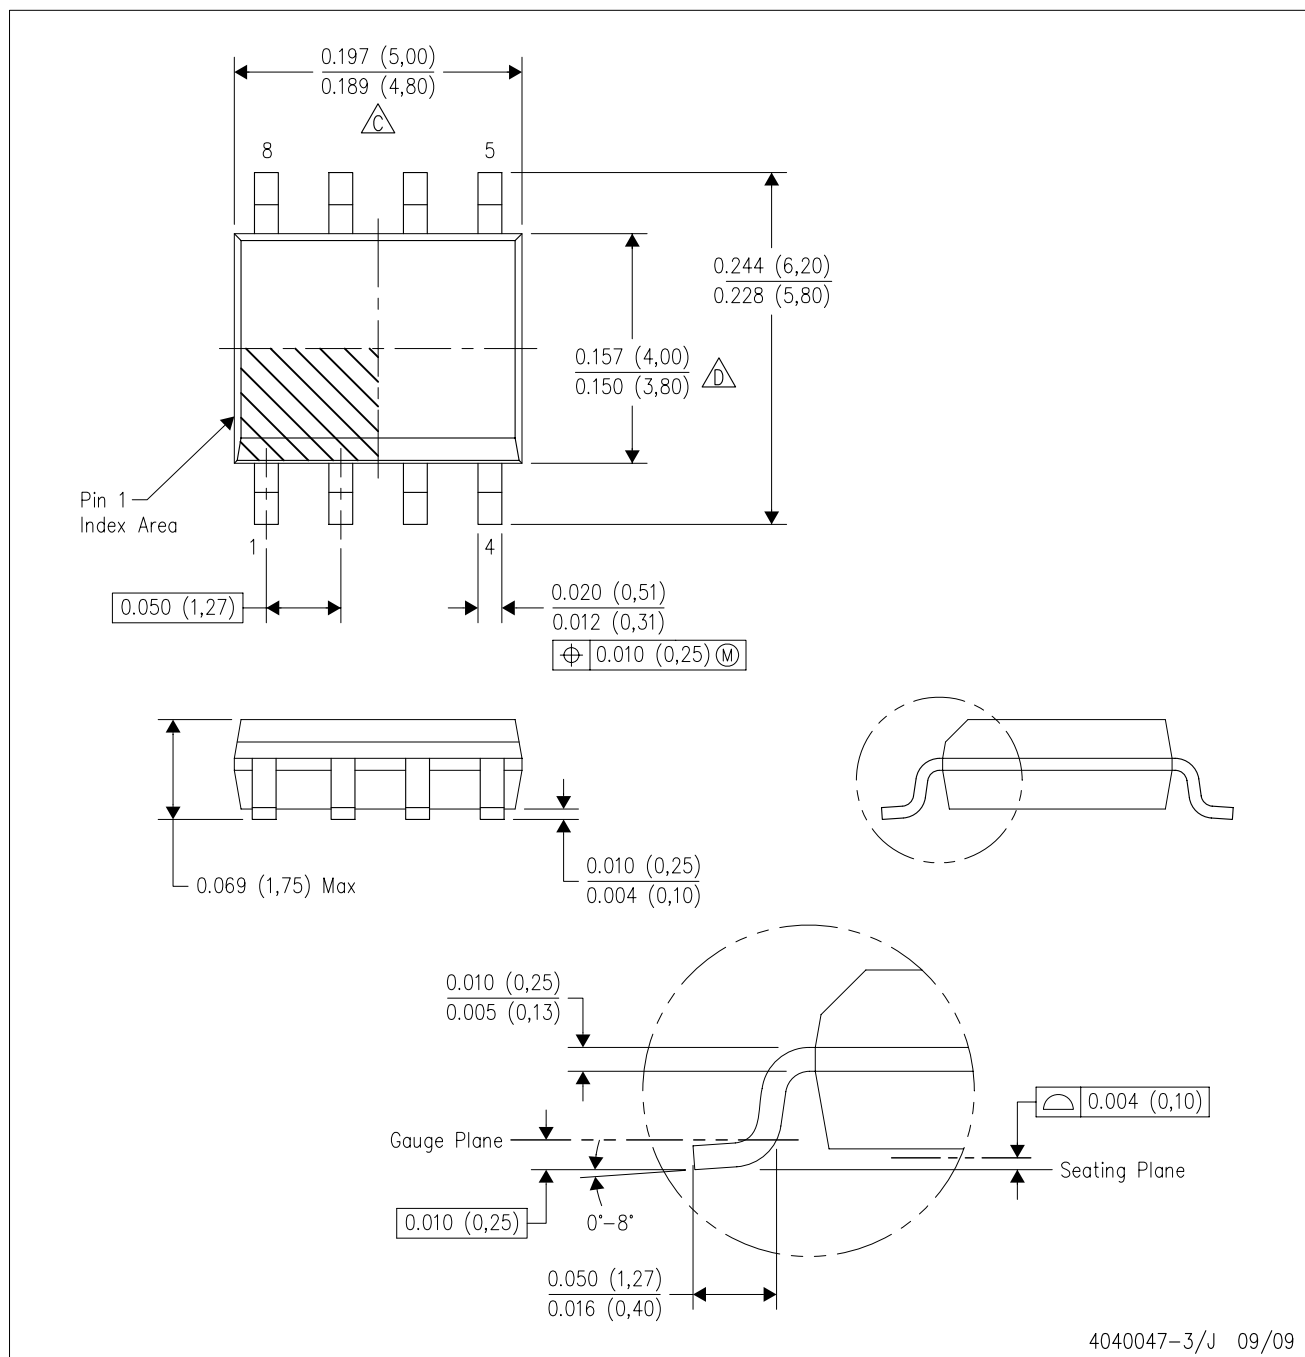


NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.  
**C** Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.  
**D** Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.  
E. Reference JEDEC MS-012 variation AA.

## JG (R-GDIP-T8)


## CERAMIC DUAL-IN-LINE

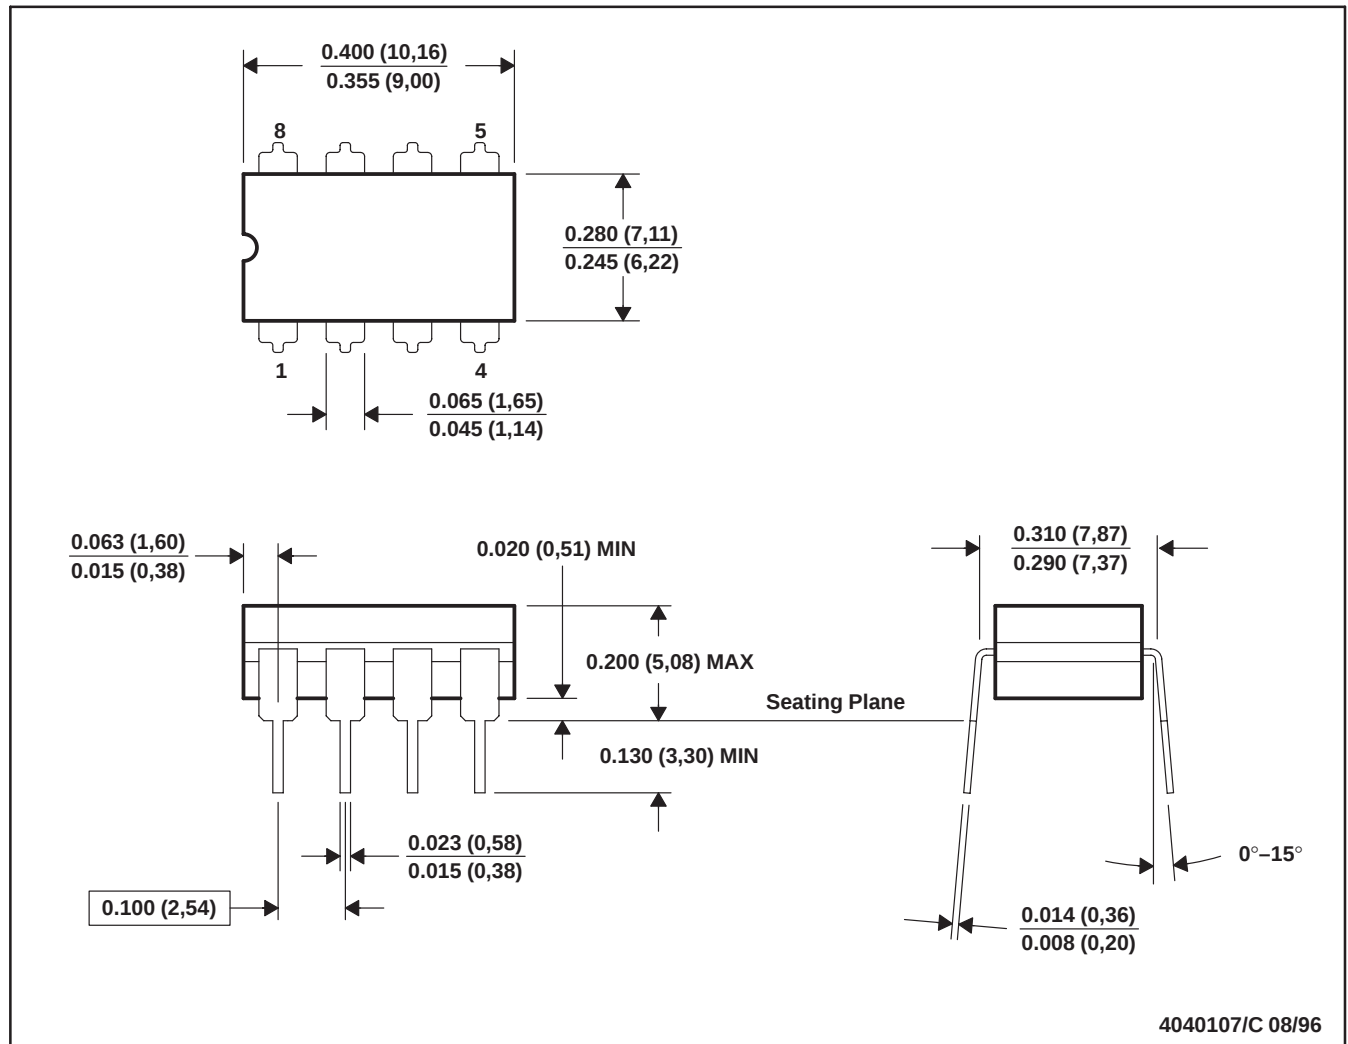

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification.  
 E. Falls within MIL STD 1835 GDIP1-T8

## DW (R-PDSO-G16)


## PLASTIC SMALL-OUTLINE PACKAGE

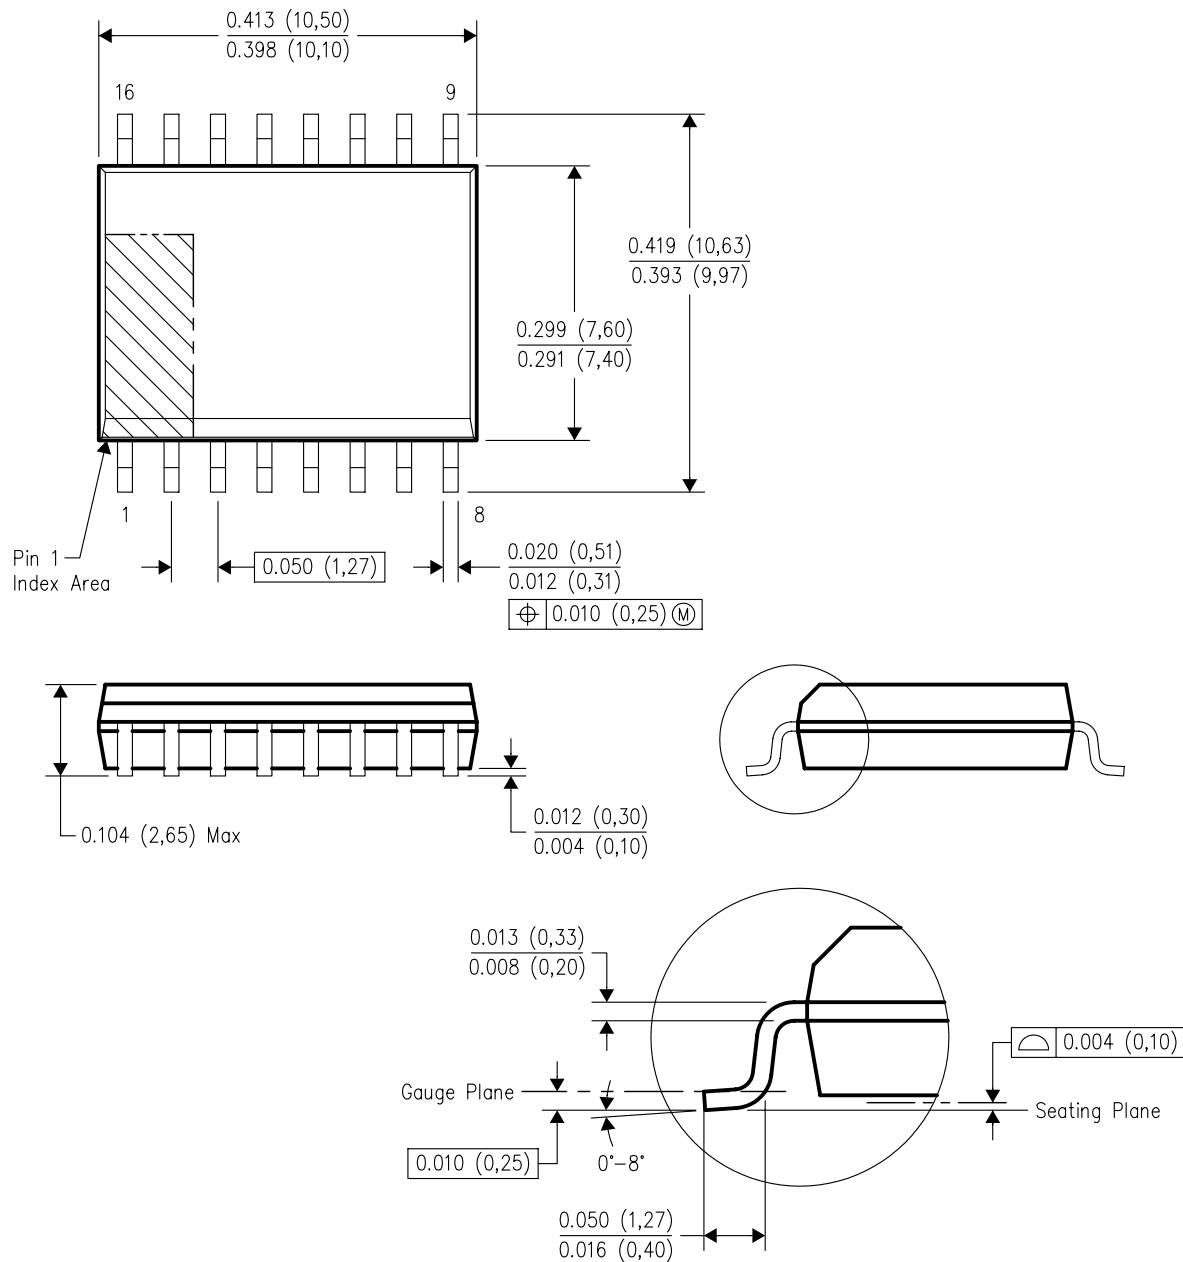

4040000-2/F 06/2004

## P (R-PDIP-T8)

## PLASTIC DUAL-IN-LINE

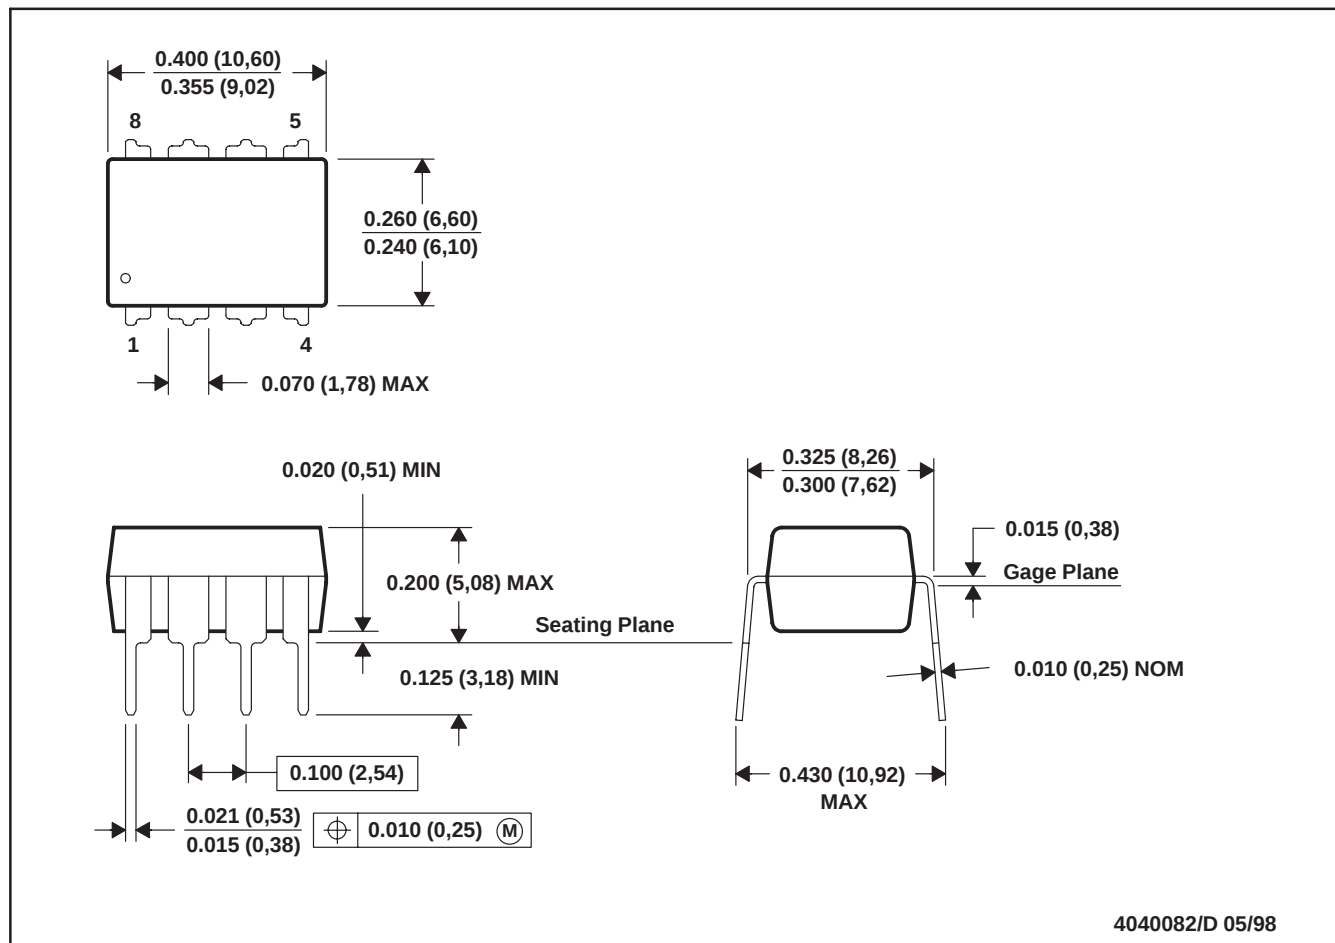

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001

For the latest package information, go to [http://www.ti.com/sc/docs/package/pkg\\_info.htm](http://www.ti.com/sc/docs/package/pkg_info.htm)

Technical drawing of a mechanical component, likely a connector or plug, showing dimensions in millimeters (mm) and inches (in).

**Top View Dimensions:**

- Overall width:  $0.045$  (1,14) /  $0.026$  (0,66)
- Overall height:  $0.080$  (2,03) /  $0.050$  (1,27)
- Internal width:  $0.250$  (6,35) /  $0.240$  (6,10)
- Internal height:  $0.008$  (0,20) /  $0.004$  (0,10)
- Distance from center to edge:  $0.300$  (7,62) MAX

**Side View Dimensions:**

- Overall height:  $0.280$  (7,11) /  $0.230$  (5,84)
- Distance from center to edge:  $0.350$  (8,89) /  $0.250$  (6,35)
- Internal height:  $0.019$  (0,48) /  $0.015$  (0,38)
- Internal width:  $0.050$  (1,27)
- Distance from center to edge:  $0.350$  (8,89) /  $0.250$  (6,35)
- 4 Places  $0.005$  (0,13) MIN

**Notes:**


- Base and Seating Plane
- 1
- 10
- 5
- 6

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only.
  - E. Falls within MIL STD 1835 GDFP1-F10 and JEDEC MO-092AA


N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

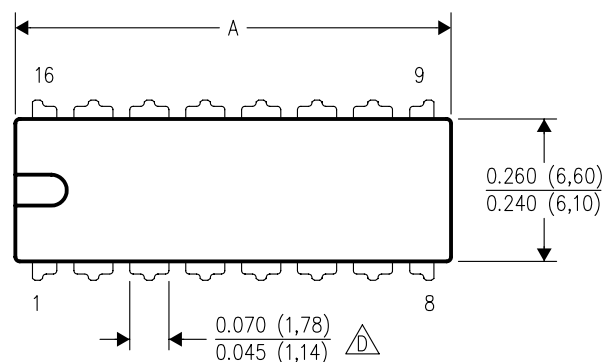

| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

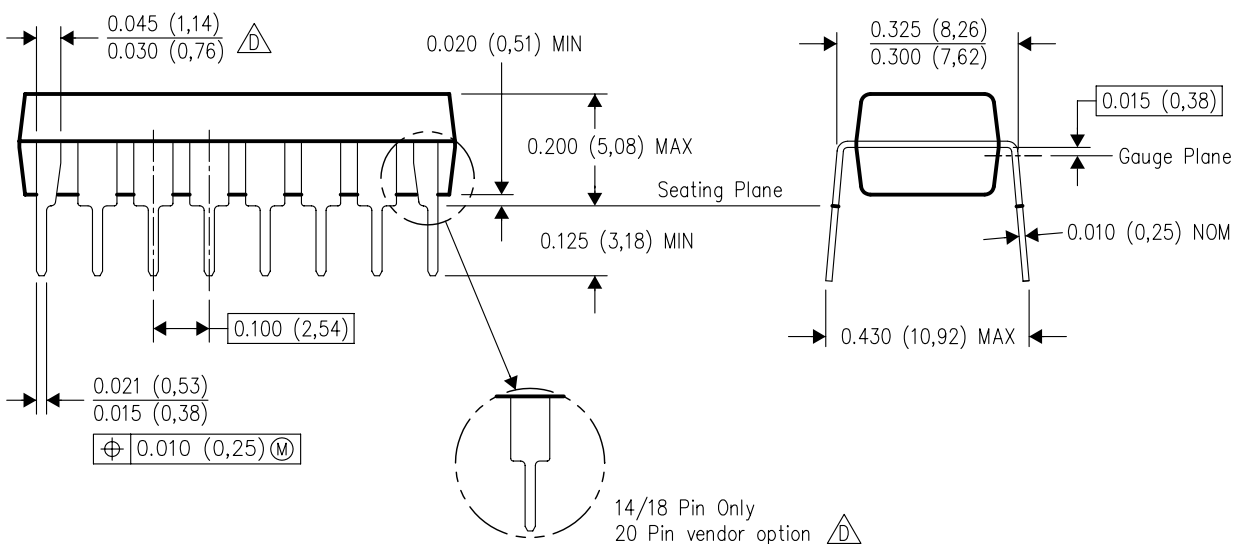

4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DLP® Products               | <a href="http://www.dlp.com">www.dlp.com</a>                       |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Medical            | <a href="http://www.ti.com/medical">www.ti.com/medical</a>               |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2009, Texas Instruments Incorporated