






ACTUAL SIZE



RECOMMENDED LED
SIZE T-1

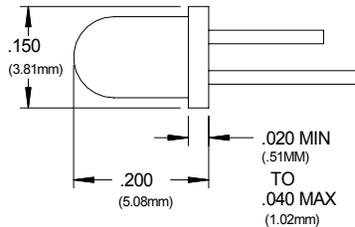

LEDs with a major ID of .125" can be accommodated by reducing the panel mounting hole size.

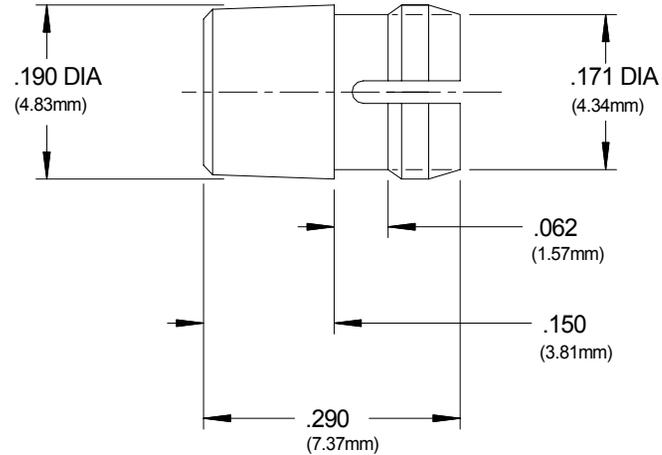

ORDERING CODES

MODEL **SML 190 RTP**
 COLOR

RTP Red Transparent BTP Blue Transparent
 ATP Amber Transparent YTP Yellow Transparent
 GTP Green Transparent CTP Clear Transparent

NOTES:

MATERIAL: Polycarbonate

DESIGN: Low profile lens using fresnel rings and striated lines.

MOUNTING: Mounts thru the front of panel. Mounting holes should be deburred but not chamfered.
 Lens mounts in a .171 ±.002 (4.34mm) hole on 1/4" centers
 Panel thickness 1/32" to 1/16"

Standard metal or plastic washer can be used to increase panel thickness if necessary.

U.S. & Foreign Pat. Issued & Pend.

TOLERANCES (EXCEPT AS NOTED)		REVISIONS			CLIPLITE® SML 190 VISUAL COMMUNICATIONS COMPANY, INC. <small>7920-G ARJONS DRIVE SAN DIEGO, CA 92126 U.S.A. (619) 549-6900</small>		
DECIMAL ±.010	ANGLE ± 30'	NO.	DESCRIPTION	DATE			
		1					
		2					
		3			DRAWN BY	JMS	
		4			SCALE	5 X	
		5			DATE	10/25/85	
					CHK'D		
					TRACED		
					MATERIAL	See Notes	
					DRAWING NO.	SML190A	