



1				
SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	5x22 AWG			
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			



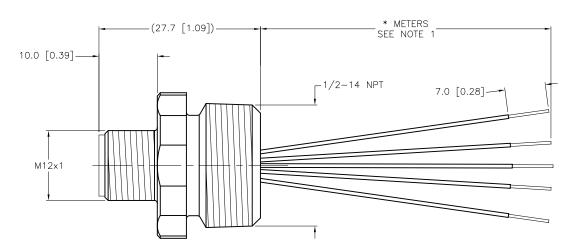

CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

С	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

2.

3.

MATERIAL

FINISH

SEE SPECIFICATIONS

SEE SPECIFICATIONS

Turck inc

High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

DATE 09/16/02 RDS SCALE 1 = .7UNIT OF MEASUREMENT MILLIMETER [INCH]

PROHIBITED.

FS 4.5-*/14.5/NPT

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO. REV FILE: 777001257 SHEET 1 OF 1