
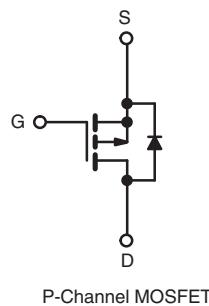


## Power MOSFET

<b>PRODUCT SUMMARY</b>	
V <sub>DS</sub> (V)	- 50
R <sub>DS(on)</sub> (Ω)	V <sub>GS</sub> = - 10 V 0.50
Q <sub>g</sub> (Max.) (nC)	9.1
Q <sub>gs</sub> (nC)	3.0
Q <sub>gd</sub> (nC)	5.9
Configuration	Single



### FEATURES

- Surface Mountable (Order as IRFR9010, SiHFR9010)
- Straight Lead Option (Order as IRFU9010, SiHFU9010)
- Repetitive Avalanche Ratings
- Dynamic dV/dt Rating
- Simple Drive Requirements
- Ease of Parallelizing
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
**HALOGEN**  
**FREE**  
Available

### DESCRIPTION

The power MOSFET technology is the key to Vishay's advanced line of power MOSFET transistors. The efficient geometry and unique processing of this latest "State of the Art" design achieves: very low on-state resistance combined with high transconductance; superior reverse energy and diode recovery dV/dt capability.

The power MOSFET transistors also feature all of the well established advantages of MOSFETs such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters.

Surface mount packages enhance circuit performance by reducing stray inductances and capacitance. The DPAK (TO-252) surface mount package brings the advantages of power MOSFETs to high volume applications where PC Board surface mounting is desirable. The surface mount option IRFR9010, SiHFR9010 is provided on 16 mm tape. The straight lead option IRFU9010, SiHFU9010 of the device is called the IPAK (TO-251).

They are well suited for applications where limited heat dissipation is required such as, computers and peripherals, telecommunication equipment, DC/DC converters, and a wide range of consumer products.

<b>ORDERING INFORMATION</b>				
Package	DPAK (TO-252)	DPAK (TO-252)	DPAK (TO-252)	IPAK (TO-251)
Lead (Pb)-free and Halogen-free	SiHFR9010-GE3	SiHFR9010TR-GE3 <sup>a</sup>	SiHFR9010TRL-GE3 <sup>a</sup>	SiHFU9010-GE3
Lead (Pb)-free	IRFR9010PbF	IRFR9010TRPbF <sup>a</sup>	IRFR9010TRLPbF <sup>a</sup>	IRFU9010PbF
	SiHFR9010-E3	SiHFR9010T-E3 <sup>a</sup>	SiHFR9010TL-E3 <sup>a</sup>	SiHFU9010-E3

#### Note

a. See device orientation.

<b>ABSOLUTE MAXIMUM RATINGS</b> (T <sub>C</sub> = 25 °C, unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V <sub>DS</sub>	- 50	V
Gate-Source Voltage	V <sub>GS</sub>	± 20	
Continuous Drain Current	V <sub>GS</sub> at - 10 V	T <sub>C</sub> = 25 °C T <sub>C</sub> = 100 °C	I <sub>D</sub>
		- 5.3 - 3.3	A
Pulsed Drain Current <sup>a</sup>	I <sub>DM</sub>	- 21	
Linear Derating Factor		0.20	W/°C
Single Pulse Avalanche Energy <sup>b</sup>	E <sub>AS</sub>	136	mJ
Repetitive Avalanche Current <sup>a</sup>	I <sub>AR</sub>	- 5.3	A
Repetitive Avalanche Energy <sup>a</sup>	E <sub>AR</sub>	2.5	mJ
Maximum Power Dissipation	T <sub>C</sub> = 25 °C	P <sub>D</sub>	W
Peak Diode Recovery dV/dt <sup>c</sup>	dV/dt	5.8	V/ns
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	- 55 to + 150	°C
Soldering Recommendations (Peak Temperature) <sup>d</sup>	for 10 s	300	

#### Notes

a. Repetitive rating; pulse width limited by maximum junction temperature (see fig. 14).  
b. V<sub>DD</sub> = - 25 V, starting T<sub>J</sub> = 25 °C, L = 9.7 mH, R<sub>g</sub> = 25 Ω, peak I<sub>L</sub> = - 5.3 A.  
c. I<sub>SD</sub> ≤ - 5.3 A, dI/dt ≤ - 80 A/μs, V<sub>DD</sub> ≤ 40 V, T<sub>J</sub> ≤ 150 °C, suggested R<sub>g</sub> = 24 Ω.  
d. 0.063" (1.6 mm) from case.


**THERMAL RESISTANCE RATINGS**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Maximum Junction-to-Ambient	$R_{thJA}$	-	-	110	°C/W
Case-to-Sink	$R_{thCS}$	-	1.7	-	
Maximum Junction-to-Case (Drain) <sup>a</sup>	$R_{thJC}$	-	-	5.0	

**Note**







a. Mounting pad must cover heatsink surface area.





**SPECIFICATIONS (T<sub>J</sub> = 25 °C, unless otherwise noted)**


PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
<b>Static</b>							
Drain-Source Breakdown Voltage	$V_{DS}$	$V_{GS} = 0 \text{ V}$ , $I_D = - 250 \mu\text{A}$		- 50	-	-	V
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = - 250 \mu\text{A}$		- 2.0	-	- 4.0	V
Gate-Source Leakage	$I_{GSS}$	$V_{GS} = \pm 20 \text{ V}$		-	-	$\pm 500$	nA
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = \text{max. rating}$ , $V_{GS} = 0 \text{ V}$		-	-	- 250	$\mu\text{A}$
		$V_{DS} = 0.8 \times \text{max. rating}$ , $V_{GS} = 0 \text{ V}$ , $T_J = 125 \text{ }^\circ\text{C}$		-	-	- 1000	
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS} = - 10 \text{ V}$	$I_D = - 2.8 \text{ A}^b$	-	0.35	0.5	$\Omega$
Forward Transconductance	$g_{fs}$	$V_{DS} \leq - 50 \text{ V}$ , $I_{DS} = - 2.8 \text{ A}$		1.1	1.7	-	S
<b>Dynamic</b>							
Input Capacitance	$C_{iss}$	$V_{GS} = 0 \text{ V}$ , $V_{DS} = - 25 \text{ V}$ , $f = 1.0 \text{ MHz}$ , see fig. 9		-	240	-	pF
Output Capacitance	$C_{oss}$			-	160	-	
Reverse Transfer Capacitance	$C_{rss}$			-	30	-	
Total Gate Charge	$Q_g$	$V_{GS} = - 10 \text{ V}$	$I_D = - 4.7 \text{ A}$ , $V_{DS} = 0.8 \times \text{max. rating}$ , see fig. 16 (Independent operating temperature)	-	6.1	9.1	nC
Gate-Source Charge	$Q_{gs}$			-	2.0	3.0	
Gate-Drain Charge	$Q_{gd}$			-	3.9	5.9	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = - 25 \text{ V}$ , $I_D = - 4.7 \text{ A}$ , $R_g = 24 \Omega$ , $R_D = 5.6 \Omega$ , see fig. 15 (Independent operating temperature)		-	6.1	9.2	ns
Rise Time	$t_r$			-	47	71	
Turn-Off Delay Time	$t_{d(off)}$			-	13	20	
Fall Time	$t_f$			-	35	59	
Internal Drain Inductance	$L_D$	Between lead, 6 mm (0.25") from package and center of die contact.		-	4.5	-	nH
Internal Source Inductance	$L_S$			-	7.5	-	
<b>Drain-Source Body Diode Characteristics</b>							
Continuous Source-Drain Diode Current	$I_S$	MOSFET symbol showing the integral reverse p - n junction diode		-	-	- 5.3	A
Pulsed Diode Forward Current <sup>a</sup>	$I_{SM}$			-	-	- 18	
Body Diode Voltage	$V_{SD}$	$T_J = 25 \text{ }^\circ\text{C}$ , $I_S = - 5.3 \text{ A}$ , $V_{GS} = 0 \text{ V}^b$		-	-	- 5.5	V
Body Diode Reverse Recovery Time	$t_{rr}$	$T_J = 25 \text{ }^\circ\text{C}$ , $I_F = - 4.7 \text{ A}$ , $dI/dt = 100 \text{ A}/\mu\text{s}^b$		33	75	160	ns
Body Diode Reverse Recovery Charge	$Q_{rr}$			0.090	0.22	0.52	$\mu\text{C}$
Forward Turn-On Time	$t_{on}$	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S$ and $L_D$ )					

**Notes**


a. Repetitive rating; pulse width limited by maximum junction temperature (see fig. 14).  
b. Pulse width  $\leq 300 \mu\text{s}$ ; duty cycle  $\leq 2 \%$ .

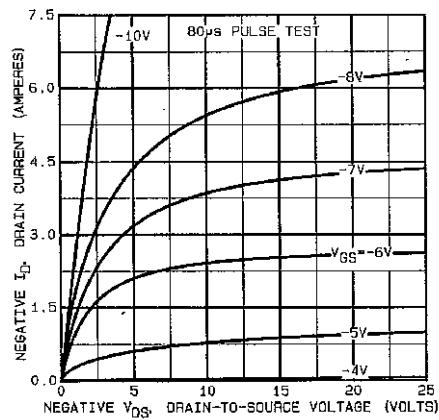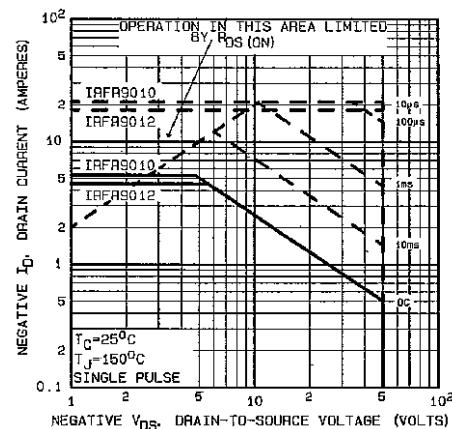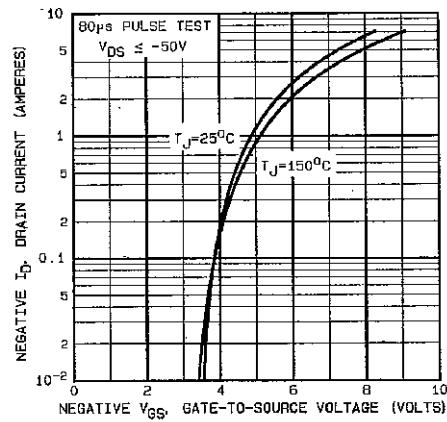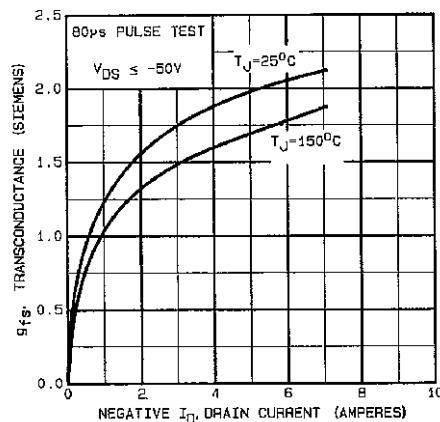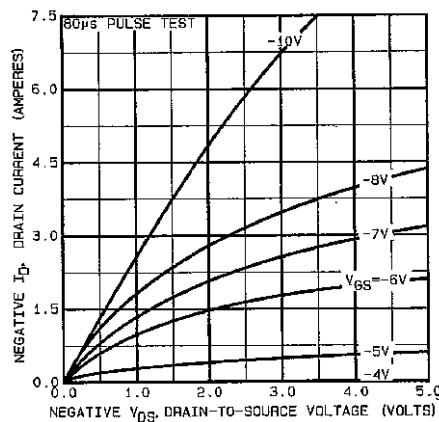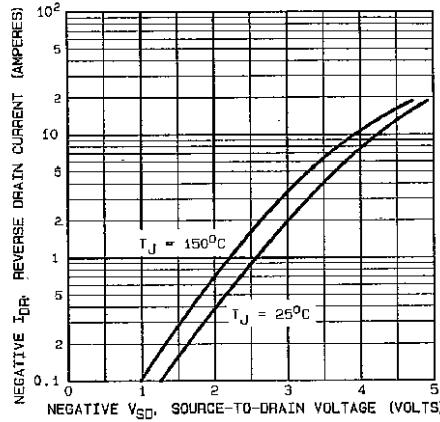**TYPICAL CHARACTERISTICS** (25 °C, unless otherwise noted)

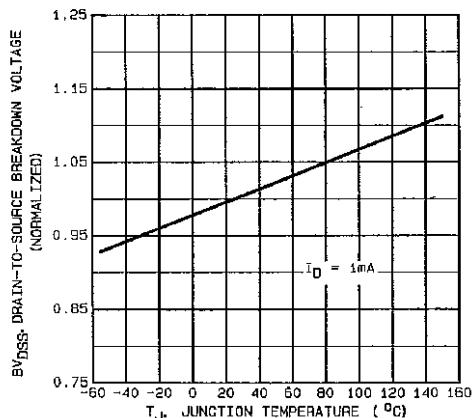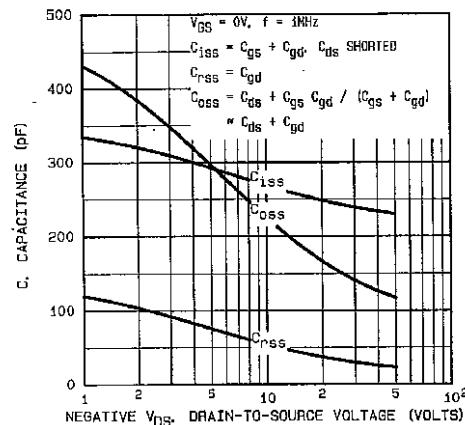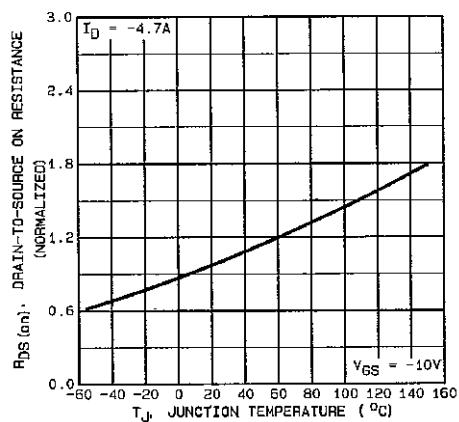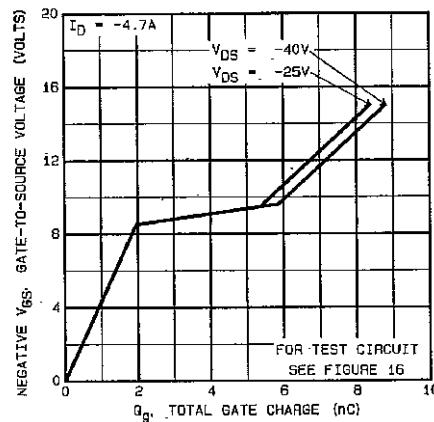**Fig. 1 - Typical Output Characteristics**

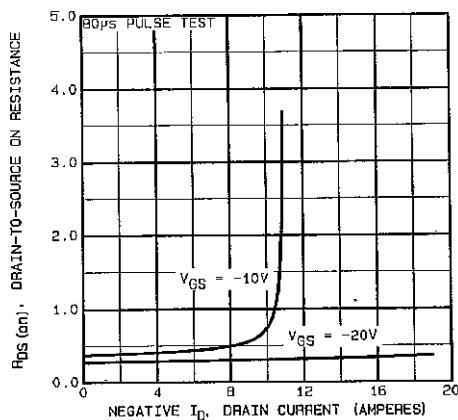**Fig. 4 - Maximum Safe Operating Area**

**Fig. 2 - Typical Transfer Characteristics**

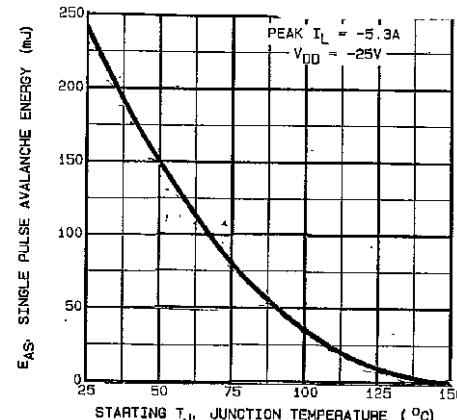**Fig. 5 - Typical Transconductance vs. Drain Current**

**Fig. 3 - Typical Saturation Characteristics**

**Fig. 6 - Typical Source-Drain Diode Forward Voltage**



**Fig. 7 - Breakdown Voltage vs. Temperature**

**Fig. 9 - Typical Capacitance vs. Drain-to-Source Voltage**

**Fig. 8 - Normalized On-Resistance vs. Temperature**

**Fig. 10 - Typical Gate Charge vs. Gate-to-Source Voltage**

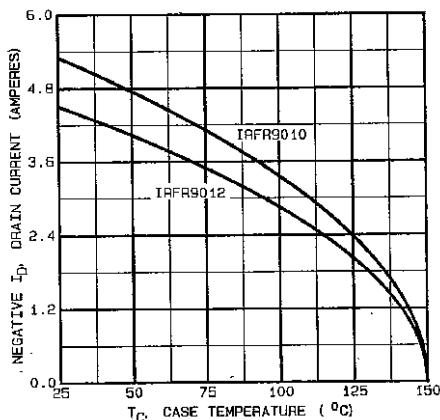


**Fig. 11 - Typical On-Resistance vs. Drain Current**




**Fig. 13a - Maximum Avalanche vs. Starting Junction Temperature**




**Fig. 12 - Maximum Drain Current vs. Case Temperature**

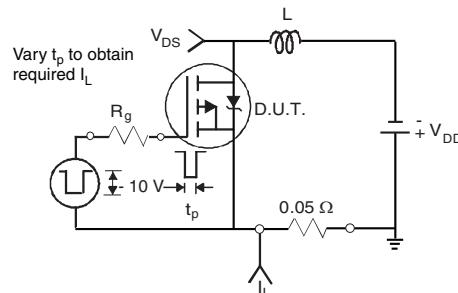


**Fig. 13b - Unclamped Inductive Test Circuit**

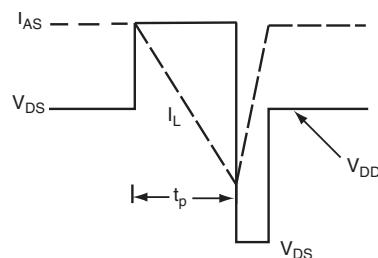


**Fig. 13c - Unclamped Inductive Waveforms**

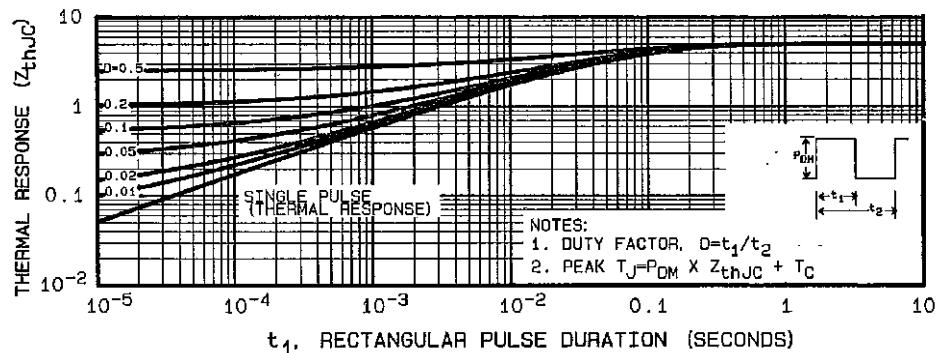


**Fig. 14 - Maximum Effective Transient Thermal Impedance, Junction-to-Case vs. Pulse Duration**

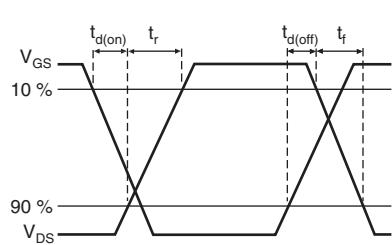


**Fig. 15a - Switching Time Waveforms**

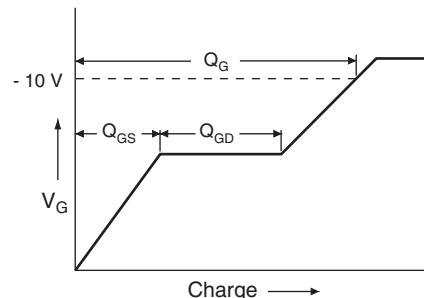



**Fig. 16a - Basic Gate Charge Waveform**

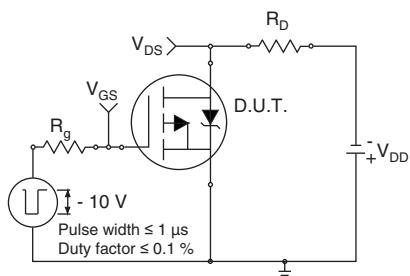

**Fig. 15b - Switching Time Test Circuit**

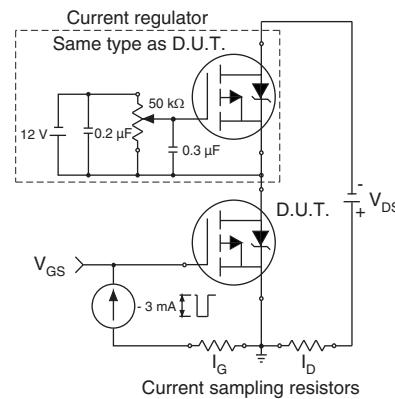

**Fig. 16b - Gate Charge Test Circuit**

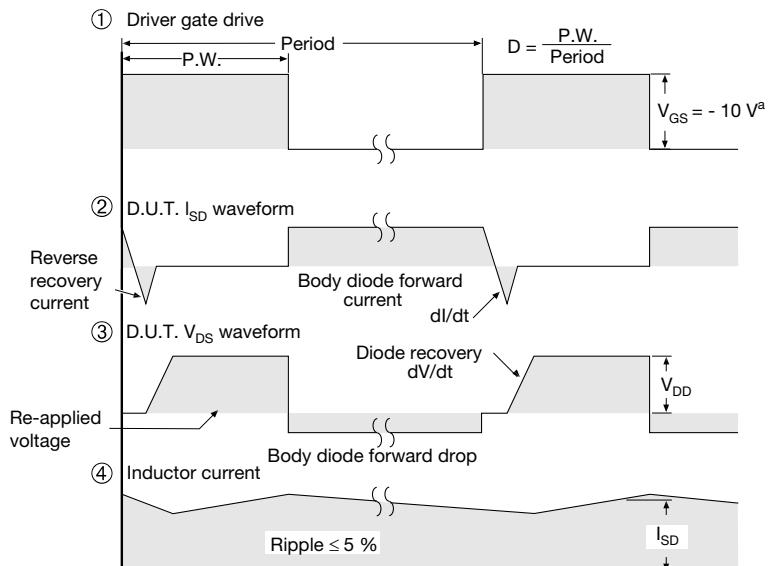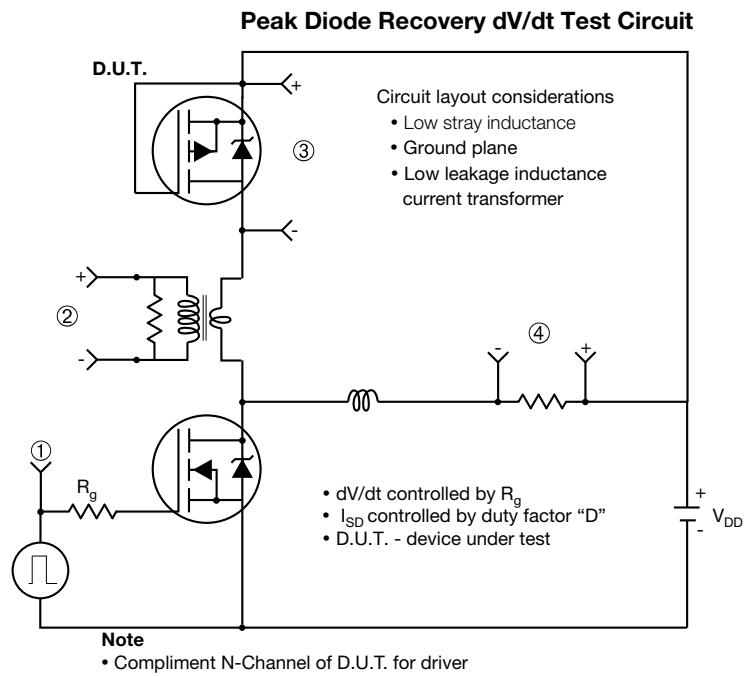


**Fig. 17 - For P-Channel**

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?91378](http://www.vishay.com/ppg?91378).

## TO-252AA Case Outline

### VERSION 1: FACILITY CODE = Y

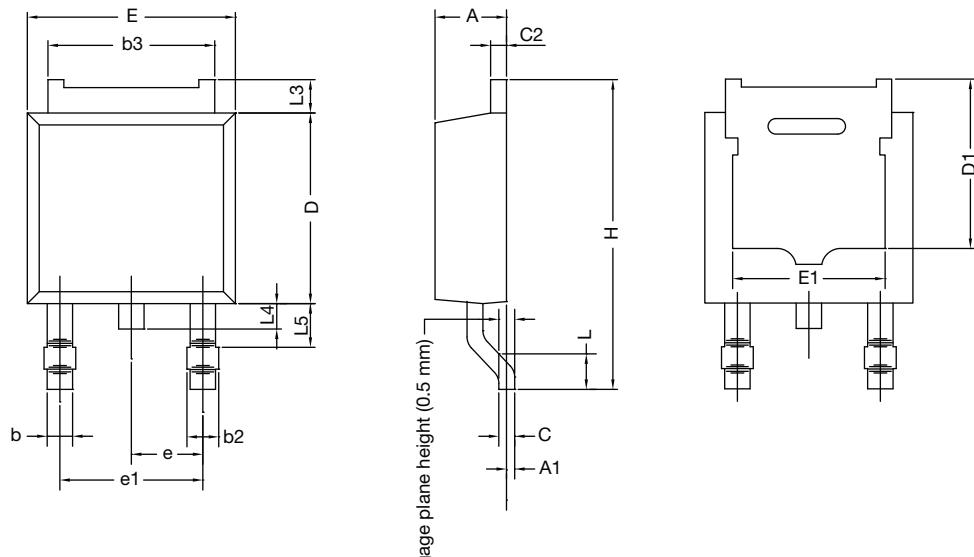


<b>MILLIMETERS</b>		
<b>DIM.</b>	<b>MIN.</b>	<b>MAX.</b>
A	2.18	2.38
A1	-	0.127
b	0.64	0.88
b2	0.76	1.14
b3	4.95	5.46
C	0.46	0.61
C2	0.46	0.89
D	5.97	6.22
D1	4.10	-
E	6.35	6.73
E1	4.32	-
H	9.40	10.41
e	2.28 BSC	
e1	4.56 BSC	
L	1.40	1.78
L3	0.89	1.27
L4	-	1.02
L5	1.01	1.52

**Note**

- Dimension L3 is for reference only

**VERSION 2: FACILITY CODE = N**

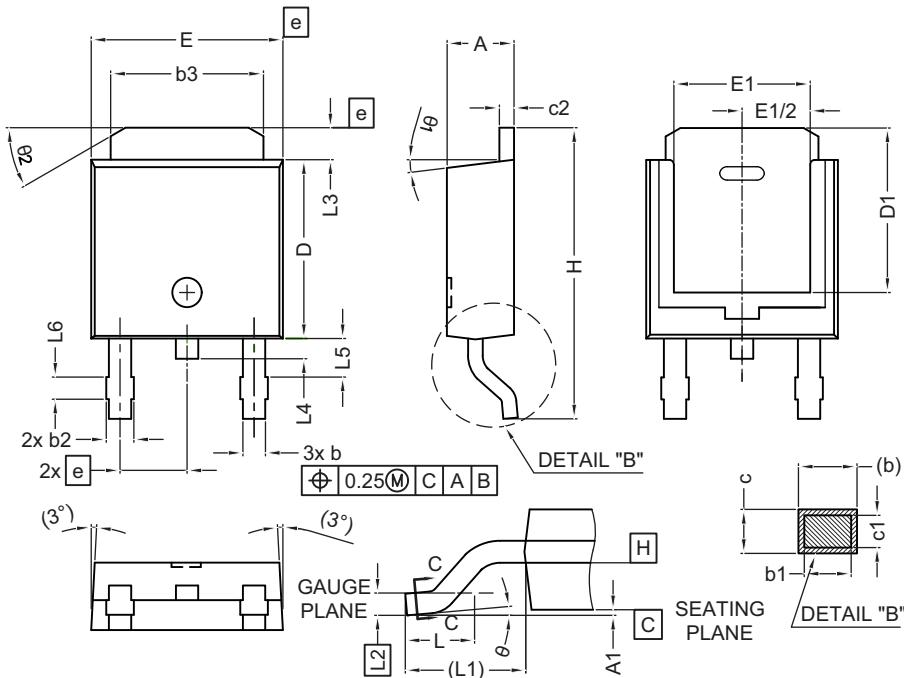

<b>MILLIMETERS</b>		
<b>DIM.</b>	<b>MIN.</b>	<b>MAX.</b>
A	2.18	2.39
A1	-	0.13
b	0.65	0.89
b1	0.64	0.79
b2	0.76	1.13
b3	4.95	5.46
c	0.46	0.61
c1	0.41	0.56
c2	0.46	0.60
D	5.97	6.22
D1	5.21	-
E	6.35	6.73
E1	4.32	-
e	2.29 BSC	
H	9.94	10.34


<b> MILLIMETERS</b>		
<b>DIM.</b>	<b>MIN.</b>	<b>MAX.</b>
L	1.50	1.78
L1	2.74 ref.	
L2	0.51 BSC	
L3	0.89	1.27
L4	-	1.02
L5	1.14	1.49
L6	0.65	0.85
$\theta$	0°	10°
01	0°	15°
02	25°	35°

## Notes

- Dimensioning and tolerance confirm to ASME Y14.5M-1994
- All dimensions are in millimeters. Angles are in degrees
- Heat sink side flash is max. 0.8 mm
- Radius on terminal is optional

ECN: E19-0649-Rev. Q, 16-Dec-2019  
DWG: 5347

## RECOMMENDED MINIMUM PADS FOR DPAK (TO-252)

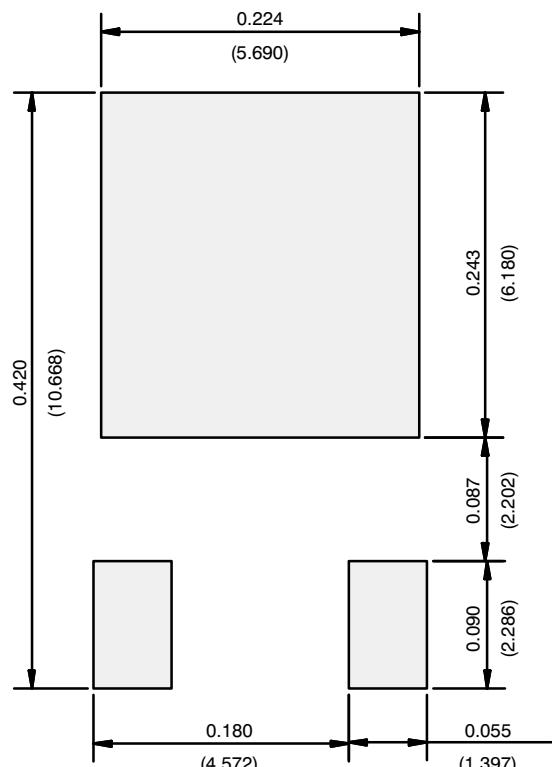

**Recommended Minimum Pads  
Dimensions in Inches/(mm)**

[Return to Index](#)

## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.