







Customer drawing



L17158706 / L17159706



L17158706 / L17159706

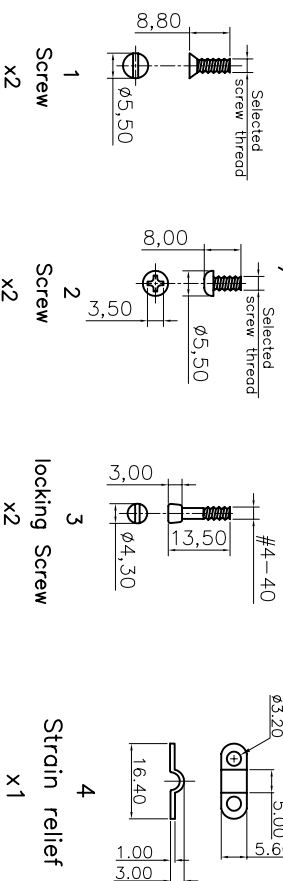

size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	—	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	—	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metalized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated

Long screws can be ordered separately:

P/N: L17D4J25401

Screws: Steel, nickel, indication of thread should be matched with the shell


Cable strain relief: Steel . nickel plated

Temperature range: -40°C to 120°C





UNLESS OTHERWISE SPECIFIED			APPROVAL		DATE	
TOLERANCES			DRAWN		10/19/07	
U.S.			CHECKED		10/19/07	
METRIC			116. working			
.X +/-			0.50			
.XX +/-			0.30			
.XXX +/-			0.20			
FRACTIONS +/-						
ANGLES +/-			5.			
FOR MATERIALS AND FINISHES			DRAWING FILE :			
SEE NOTES			(drawing) Drawn/CITY/XXXXX			
REMOVE SHARP EDGES			ANGLE OF PROJECTION			
DIMENSIONS						
O/S. INCHES						
METRIC						
TITLE			Metelized and plastic HOOD			
SIZE			DRAWING NO.		REV.	
A4			C L71XXXX06		A	
SCALE			NONE		SHEET 1 OF 5	

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be distributed, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation without its prior consent. All right is granted to distribute or to use any information in this document.




Customer drawing



L17158806 /L17159806



L17158806 /L17159806

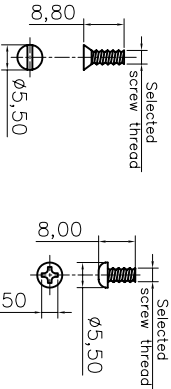

1
Screw
x2

2
Screw
x2

3
locking Screw
x2

4
Strain relief
x1



size	plastic/short screws	metallized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

REVSIONS			
SN	EDN	DESCRIPTION	DATE
A	HK4729	Release new drawing	10/19/07

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metallized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated

Long screws can be ordered separately:

P/N: L17D4J25401

Screws: Steel, nickel, indication of thread should be matched with the shell

Cable strain relief: Steel . nickel plated

Temperature range: -40°C to 120°C

UNLESS OTHERWISE SPECIFIED			
TOLERANCES			
U.S.	METRIC	APPROVAL	DATE
XX +/-	0.50	DRAWN	10/19/07
XX +/-	0.30	CHECKED	10/19/07
XX +/-	0.20		
ANGLES +/-	5°		
FOR MATERIALS AND FINISHES			
SEE MATERIALS AND FINISHES			
REMOVE SHARP EDGES			
DIMENSIONS			
TOLERANCE			
ANGLE OF PROJECTION			
SIZE			
DRAWING NO.			
C L171XXX06			
SCALE			
NONE			
SHEET 2 OF 5			

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be duplicated, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation. Amphenol Corporation assumes no responsibility for the use of this document without its prior consent, and that no right is granted to disclose or to use any information in this document.

Customer drawing

REVISONS			
SN	EDN	DESCRIPTION	DATE
A	HK4729	Release new drawing	10/19/07
			APPROVED
			IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metallized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated


Long screws can be ordered separately:

P/N: L17D4J25401




Screws: Steel, nickel, indication of thread should be matched with the shell

Cable strain relief: Steel . nickel plated



Temperature range: -40°C to 120°C




L17158906 /L17159906




L17158906 /L17159906



1
Screw
x2



2
Screw
x2



3
locking Screw
x2



4
Strain relief
x1



size	plastic/short screws	metallized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

DIMENSIONS SPECIFIED				APPROVAL		DATE	
TOLERANCES				DRAWN		CHECKED	
U.S.				10/19/07		10/19/07	
METRIC				10/19/07		10/19/07	
X				X		X	
XX				XX		XX	
XXX				XXX		XXX	
ANGLES				5°		5°	
FOR MATERIALS AND FINISHES				DRAWING FILE		DRAWING FILE	
REMOVE SHARP EDGES				ANGLE OF PROJECTION		ANGLE OF PROJECTION	
DIMENSIONS				SIZE		SCALE	
THICKNESS				A4		NONE	
MIN				C L171XXX06		SHEET 3 OF 5	
REWORK				REV		REV	
				A		A	

Amphenol

Metallized and plastic H00D

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be duplicated, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

Customer drawing

REVISONS			
SN	EDN	DESCRIPTION	DATE
A	HK4729	Release new drawing	10/19/07
			APPROVED
			IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metalized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated



Long screws can be ordered separately:

P/N: L17D4J25401

Screws: Steel, nickel, indication of thread should be matched with the shell

Cable strain relief: Steel . nickel plated

Temperature range: -40°C to 120°C

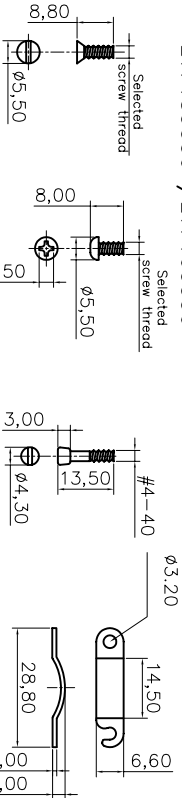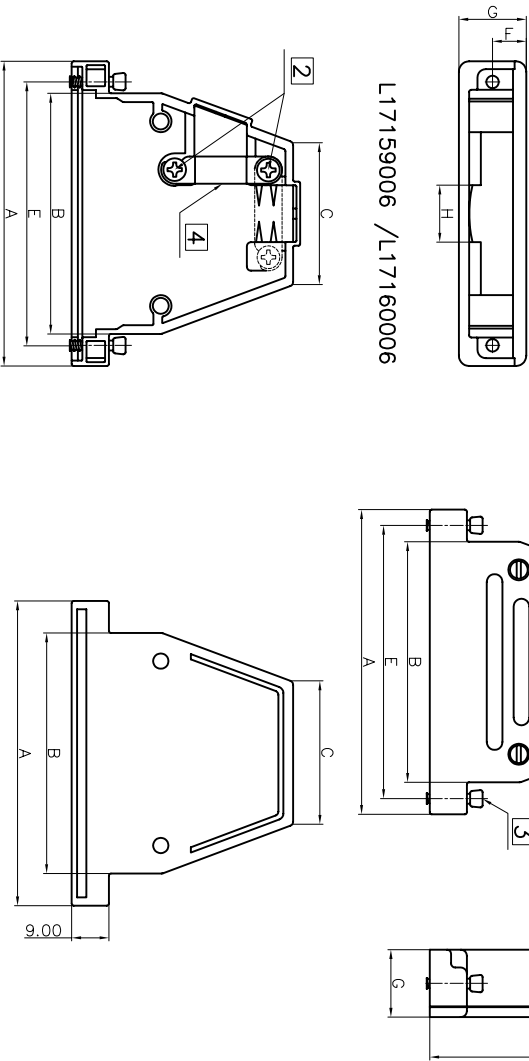

size	plastic/short screws	metalized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5

UNLESS OTHERWISE SPECIFIED				APPROVAL		DATE	
TOLERANCES				DRAWN		CHECKED	
U.S.				10/19/07		10/19/07	
METRIC				10/19/07		10/19/07	
X +/-				0.50		0.50	
XX +/-				0.30		0.30	
XXX +/-				0.20		0.20	
ANGLES +/-				5°			
SURF. MATERIALS AND FINISHES SEE REMOTE SHARP EDGES				DRAWING FILE : C:\P\17XXX06			
				drawing/Draw/Copy/17XXX06			
DIMENSIONS				ANGLE OF PROJECTION			
FIRST ANGLE				FIRST ANGLE			
SECOND ANGLE				SECOND ANGLE			
THIRD ANGLE				THIRD ANGLE			
FOURTH ANGLE				FOURTH ANGLE			
FIFTH ANGLE				FIFTH ANGLE			
SIXTH ANGLE				SIXTH ANGLE			
SEVENTH ANGLE				SEVENTH ANGLE			
EIGHTH ANGLE				EIGHTH ANGLE			
NINTH ANGLE				NINTH ANGLE			
TENTH ANGLE				TENTH ANGLE			
ELEVENTH ANGLE				ELEVENTH ANGLE			
TWELFTH ANGLE				TWELFTH ANGLE			
THIRTEENTH ANGLE				THIRTEENTH ANGLE			
FOURTEENTH ANGLE				FOURTEENTH ANGLE			
FIFTEENTH ANGLE				FIFTEENTH ANGLE			
SIXTEENTH ANGLE				SIXTEENTH ANGLE			
SEVENTEENTH ANGLE				SEVENTEENTH ANGLE			
EIGHTEENTH ANGLE				EIGHTEENTH ANGLE			
NINETEENTH ANGLE				NINETEENTH ANGLE			
TWENTIETH ANGLE				TWENTIETH ANGLE			
TITLES				Metalized and plastic H00D			
SIZE				DRAWING NO.			
A4				C L171XXX06			
SCALE				NONE			
SHEET				4 OF 5			

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be duplicated, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation. Amphenol Corporation and its subsidiaries and affiliates shall not be held responsible for any errors or omissions in this document. Amphenol Corporation and its subsidiaries and affiliates shall not be held responsible for any damages or losses of any kind, including consequential damages, arising from the use of this document or the products described herein.

Customer drawing

D-SUB TECHNICAL DATA

Material and finish:

Shell: plastic type :plastic

metallized type :UL94 V-0 plastic material with plating

Locking screws: Steel , nickel plated



Long screws can be ordered separately:

P/N: L17D4J25401

Screws: Steel, nickel, indication of thread should be matched with the shell

Cable strain relief: Steel . nickel plated

Temperature range: -40°C to 120°C

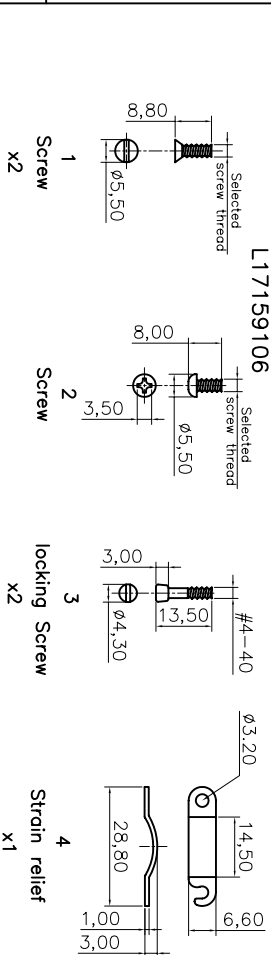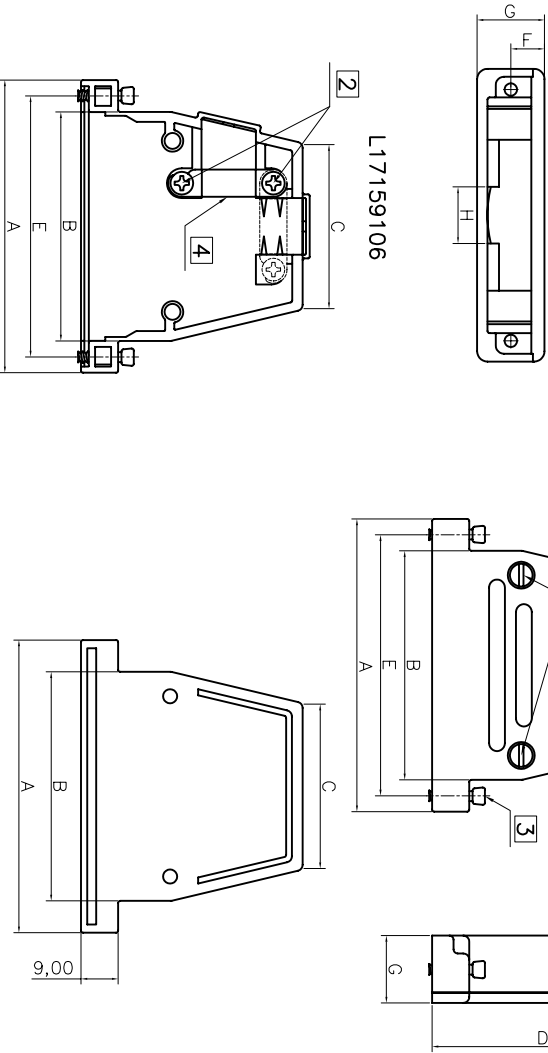

size	plastic/short screws	metallized / short screws	Dimension							
			A	B	C	D	E	F	G	H
E	L17-1587-06	L17-1597-06	34.5	19.3	-	40.9	25.0	8.15	16.3	6.4
A	L17-1588-06	L17-1598-06	42.9	27.6	-	48.0	33.3	8.15	16.3	9.5
B	L17-1589-06	L17-1599-06	56.6	41.3	32.5	48.0	47.0	8.15	16.3	9.5
C	L17-1590-06	L17-1600-06	73.0	57.7	35.6	53.1	63.5	8.15	16.3	13.5
D	L17-1591-06		70.6	55.4	39.8	53.1	61.1	9.65	19.2	13.5



REVISIONS			
SN	EDN	DESCRIPTION	DATE
A	HK4729	Release new drawing	10/19/07

UNLESS OTHERWISE SPECIFIED			
TOLERANCES			
U.S.	METRIC	APPROVAL	DATE
XX +/-	0.50	DRAWN	10/19/07
XX +/-	0.30	CHECKED	10/19/07
XX +/-	0.20		
ANGLES +/-	5°		
SURF. MATERIALS AND FINISHES			
REMOVE SHARP EDGES			
DIMENSIONS			
TOLERANCE			
ANGLE OF PROJECTION			
SIZE DRAWING NO.			
SCALE			
SHEET 5 OF 5			