

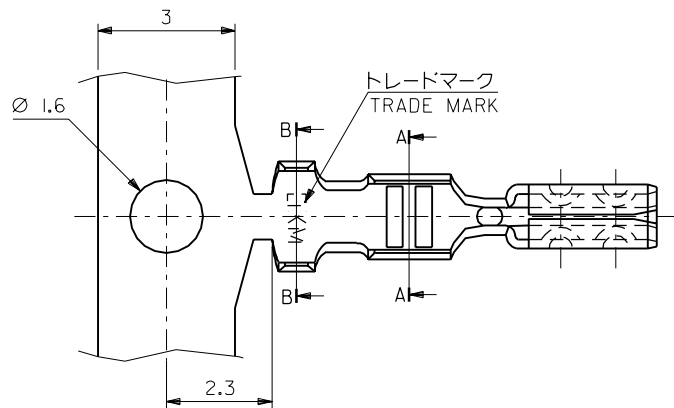



断面 A-A
SECT. A-A



断面 B-B
SECT. B-B

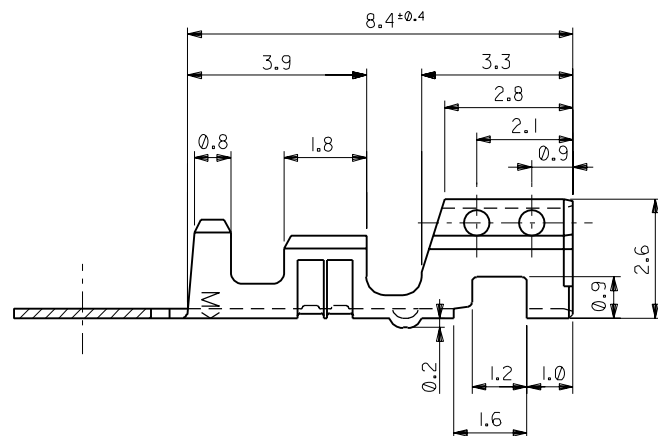

挿抜力により管理

CONTROL TO
INSERTION &
EXTRACTION FORCE.

注記 NOTES:

I. 適合ハウジング:
APPLICABLE HOUSING: 51191-**-00

錫メッキ済リン青銅 PRE-TINNED PHOS-BRO.	50802-8100	バラ状 LOOSE
錫メッキ済リン青銅 PRE-TINNED PHOS-BRO.	50802-8000	連鎖状 CHAIN
錫メッキ済黄銅 PRE-TINNED BRASS	50802-9101	バラ状 LOOSE
錫メッキ済黄銅 PRE-TINNED BRASS	50802-9001	連鎖状 CHAIN
材料 MATERIAL	MATERIAL NO.	端子形状 FORM

MODEL NO. 50802-****		DIMENSIONS:		SHT	REV
DESIGN UNITS	2ND ANGLE PROJECTION	☐ mm ☐ INCH	☐ INCH ☐ mm	☒ mm ONLY	REVISE ON CAD ONLY
☒ mm ☐ INCH					

DRAWN BY & DATE S.MATSUZAKI 98/4/9	TITLE: 2.5 WIRE TO BOARD CONN. CRIMP RECEPTACLE
CHECKED BY & DATE S. KUNITSU 98/4/10	

APPROVED BY & DATE M.FUKUSHIMA 98/4/10		MOLEX MOLEX INCORPORATED	
CAD FILENAME 50802002.S01	MATERIAL NO. 50802-****	DRAWING NO. SD-50802-002	SHEET NO. 1/1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

P84NO. DRWN: CH'K: APPR: P83NO. DRWN: CH'K: APPR: P82NO. DRWN: CH'K: APPR: P81NO. DRWN: CH'K: APPR:	RELEASED 060NO. JC80766 DRWN: S.MATSUZAKI '98/4/9 CH'K: S.KUNISHI '98/4/10 APPR: M.FUKUSHIMA '98/4/10	MATERIAL 材料 表参照 (t=0.203) SEE TABLE FINISH 仕上げ  WIRE RANGE 適用電線範囲 AWG #22 ~ #28 0.33 ~ 0.08mm ²	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差
	0	INS. RANGE 被覆外径 Ø 1.15 ~ 1.9	10 UNDER 未満 ±0.2 10 OVER 30 UNDER 以上 未満 ±0.2 30 OVER 以上 ±0.3 ANGLE 角度 ±3°