

8

7

6






5

4



3

2

1

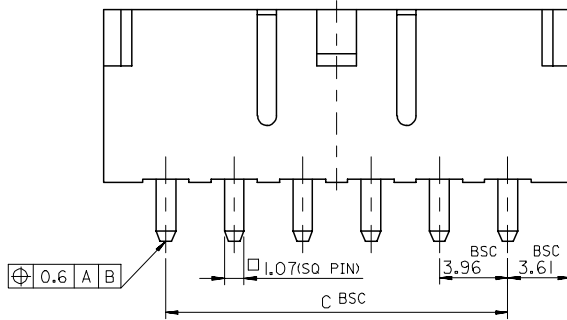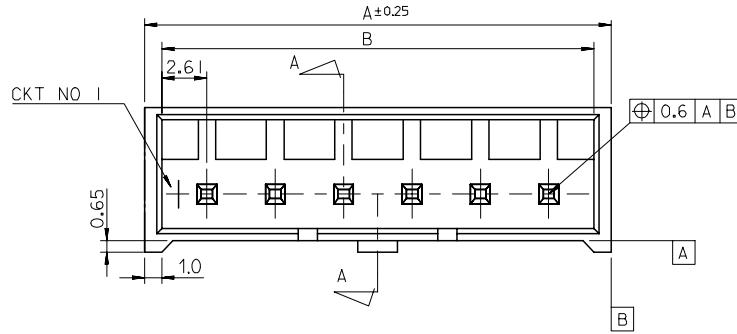

2 CKT ONLY

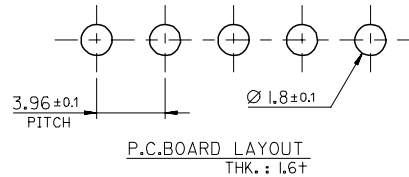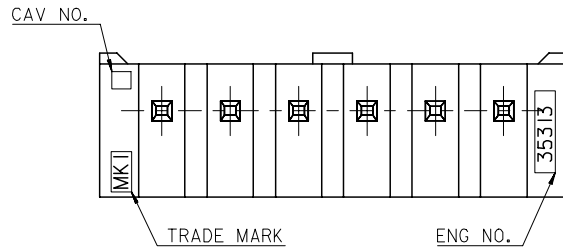


NOTE

1. MATERIAL : WAFER : NYLON66, GLASS FILLED 20%
PIN : BRASS, TIN PLATED

2. LEGEND

35313-** 6 *

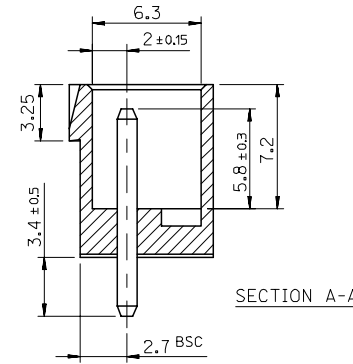COLOR : 0 - NATURAL
1 - BLACK
2 - RED
3 - YELLOW
4 - BLUE
CKT NO.(02,03,04...)3. THIS PRODUCT SHALL BE COMPLIED WITH
RoHS COMPATIBLE(LEAD FREE SOLDERABILITY)

SECTION A-A

43.56	48.78	50.78	35313-126*	12
39.6	44.82	46.82	-116*	11
35.64	40.86	42.86	-106*	10
31.68	36.9	38.9	-096*	9
27.72	32.94	34.94	-086*	8
23.76	28.98	30.98	-076*	7
19.8	25.02	27.02	-066*	6
15.84	21.06	23.06	-056*	5
11.88	17.1	19.1	-046*	4
7.92	13.14	15.14	-036*	3
3.96	9.18	11.18	35313-026*	2
C	B	A	ENG NO.	CKT NO.

REVISED	EC NO. KOR2006-0105 DRWN: K.S.KIM 06/03/23 CHK: K.S.KIM APPR: Y.Soo.KIM	DESCRIPTION	QUALITY SYMBOLS MAJOR = CRITICAL C =	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 3.5:1	DESIGN UNITS ☒ mm ☐ INCH		THIRD ANGLE PROJECTION	☐ mm INCH	☐ INCH mm	☒ mm ONLY	REVISE ON CAD ONLY
					mm	INCH	DRAWN BY & DATE K.S.KIM 040513		TITLE: 3.96 PITCH W/B CONN. WAFER ASS'Y (WITH LOCK)				
				4 PLACES	±0.	±.	CHECKED BY & DATE Y.Soo.KIM						
				3 PLACES	±0.	±.	APPROVED BY & DATE C.W.LEE						
				2 PLACES	±0.2	±.	CAD FILENAME _____		MATERIAL NO. SEE CHART	DRAWING NO. SD-35313-001		SHEET NO. 1 OF 1	
				1 PLACE	±0.2	±.	MOLEX MOLEX INCORPORATED						
				ANGULAR: ± °									
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.							SIZE B

8

7

6

5

4

3

2

MX-A3