



ORDERING CODE

Example:

ZP=Zettler standard series

AP=Customized series

HP=High Performance series

DP=DC-DC

Output Power (W)

03=3W

20=20W

Output Type

S=Single Output

D=Dual Output

T=Triple Output

First Output Voltage

05=5V, 12=12V

Second Output Voltage

06=6V, 12=12V

00= No Second Output

Input AC Voltage Range

W=Wide Voltage Input


H=High Voltage Input ($\geq 165\text{VAC}$)

L=Low Voltage Input ($< 165\text{VAC}$)

Case Dimension

A: A Type case

B: B Type case...

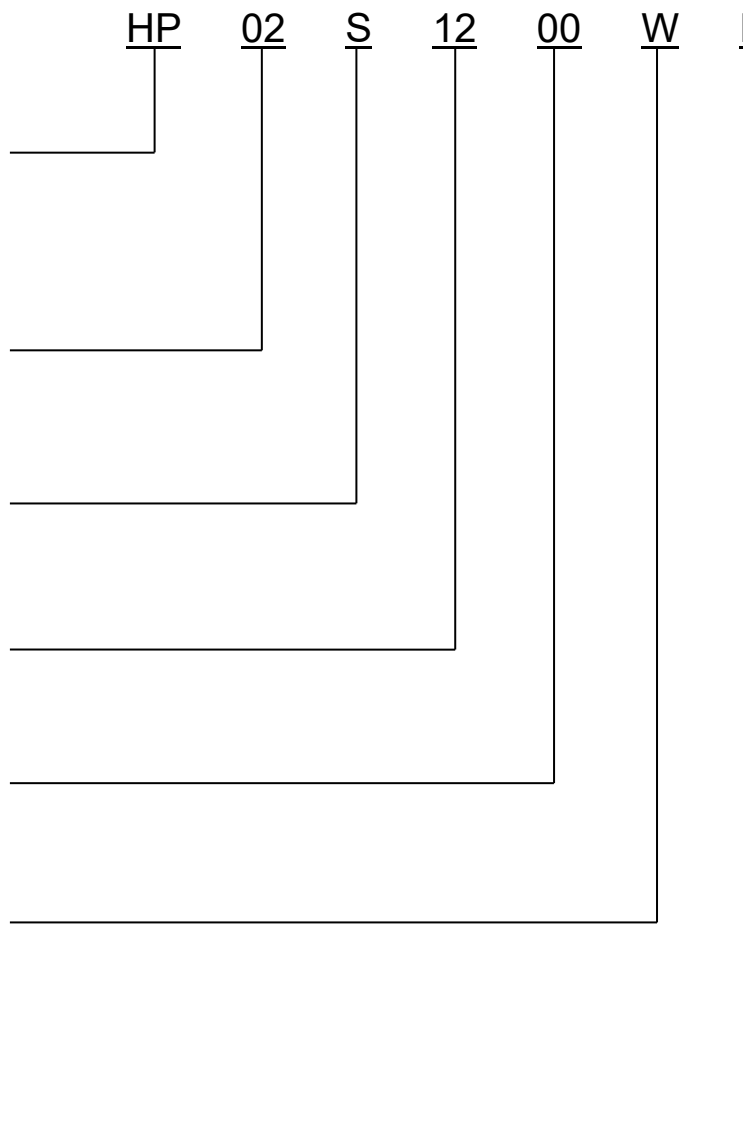

FEATURES

- PCB mounted switching Power module
- AC input voltage range: 85VAC~305VAC
- DC input voltage range: 100VDC~430VDC
- Ambient temperature range: -25℃~85℃
- Storage temperature range: -40℃~105℃
- Leakage current (Input :305VAC): <0.25mA
- Isolation voltage: Input –Output ≥3600VAC 60S
- Insulation Resistance: Input –Output 500VDC ≥100M Ohms
- MTBF : 1000Khrs Min MIL-HDBK-217F (25℃)
- Compact size, easy installation
- High efficiency low standby power consumption <0.15W, Environment-friendly
- Built-in output over current protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55032 class B standard
- Class II Construction

APPLICATIONS

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.

NOTE: Contact Zettler for information on halogen free options



MODEL LIST

Model No.	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple & Noise (max)	Ambient TEMP(℃)	Weight	Certificate			
								UL	TUV	CE	CB
HP02S0300WI	2W	3.3Vdc	600mA	66%	150mVp-p	85	20g	●	●	●	●
HP02S0500WI	2W	5 Vdc	400mA	70%	150mVp-p	85	20g	●	●	●	●
HP02S0600WI	2W	6 Vdc	333mA	70%	150mVp-p	85	20g	●	●	●	●
HP02S0700WI	2W	7.5Vdc	266mA	72%	150mVp-p	85	20g	●	●	●	●
HP02S0800WI	2W	8Vdc	250mA	72%	150mVp-p	85	20g	●	●	●	●
HP02S0900WI	2W	9Vdc	222mA	72%	150mVp-p	85	20g	●	●	●	●
HP02S1000WI	2W	10Vdc	200mA	72%	150mVp-p	85	20g	●	●	●	●
HP02S1200WI	2W	12Vdc	167mA	74%	150mVp-p	85	20g	●	●	●	●
HP02S1500WI	2W	15Vdc	133mA	75%	200mVp-p	85	20g	●	●	●	●
HP02S1800WI	2W	18Vdc	111mA	75%	200mVp-p	85	20g	●	●	●	●
HP02S2400WI	2W	24Vdc	83mA	77%	200mVp-p	85	20g	●	●	●	●


ELECTRICAL SPECIFICATION

Model No.		HP02SXX00WI	
Input	Rated Voltage	100~277VAC	
	Voltage Range	85~305VAC or 100~430VDC	
	Frequency (Hz)	47-63 Hz	
	Current (Full load)	115VAC	230VAC
		45mA	30mA
	Inrush Current (<500us)	6A	10A
	No Load Loss	0.15W Max@230VAC	
HOT PLUG		Unavailable	
Output	Voltage (V)	Refer to "Model List"	
	Current (mA) max.	Refer to "Model List"	
	Voltage Accuracy	±3%	
	Line Regulation	±0.5%	
	Load Regulation	±0.5%	
	Minimum Load (mA)	0	
	Ripple & Noise	Refer to "Model List"	
	Efficiency (typ.)	Refer to "Model List"	
	Set-up Time	≤50ms/230Vac, ≤30ms/115Vac	
	Hold up Time	>40ms/230VAC, 12ms/115VAC	
Protection	Over Current Protection	≥120%Io Self-recovery	
	Short Circuit Protection	Hiccup ,continuous ,short capable, self-recovery	
Environment	Operating Temperature	-25°C...+85°C @Free air convection	
	Operating Humidity	10-90% RH	
	Storage Temperature	-40°C...+105°C	
	Storage Humidity	5~95% RH (No Condensing) at full load	
	Temperature Coefficient	±0.03%/°C (0~85°C)	
Physical	Case Material	Plastic (UL 94V-0 rated)	
	Weight	20g (ref.)	
Safety & EMC	Dielectric Strength	I/P-O/P : 3600VAC	
	Safety Standards	Compliance With UL/EN62368-1 ,EN61558-2-16	
	EMI	Compliance With EN55032, CLASS B EN61000-3-2, EN61000-3-3	
	EMS (Noise Immunity)	Compliance With EN55035	Need to add external EMC component (Refer to the Schematic)
Reliability Requirement	MTBF	1000Khrs Min MIL-HDBK-217F (25°C)	
	Burn-In Test	The unit shall be burned in for 2~4 Hours under 264Vac input and DC with full load at 25°C	

PRODUCT CHARACTERISTIC CURVE

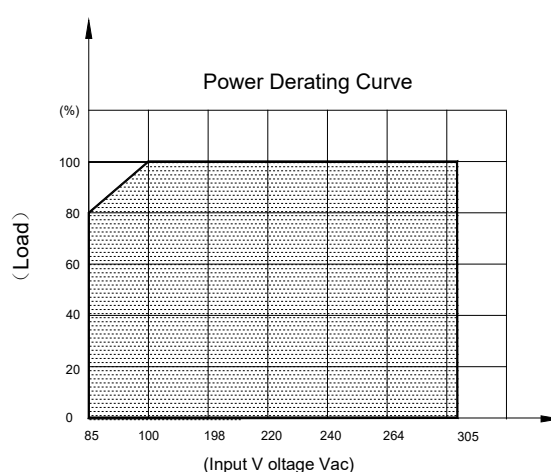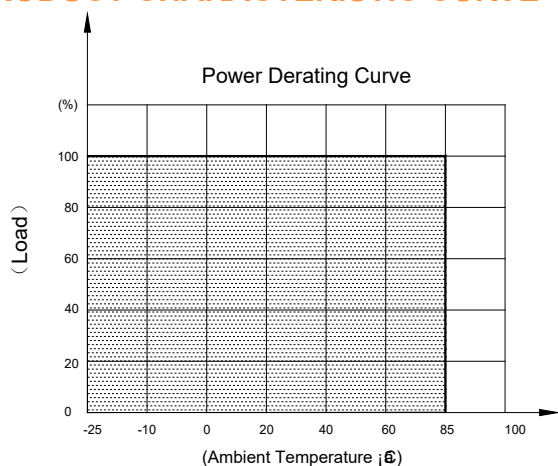

TYPICAL APPLICATION SCHEMATIC

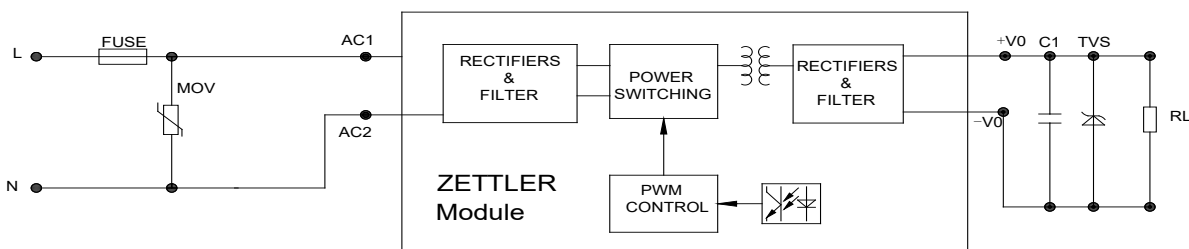

ITEM	MOV	FUSE
1~2W	14D561K	1A/300V
3~10W	14D561K	2A/300V
10~20W	14D561K	3.15A/300V

Note: External circuit components are only recommendations, customers should choose their own components and values according to their specific system application requirements.

MECHANICAL SPECIFICATION

