

MCNDI Series


DIP Switches




RoHS
Compliant




MCNDI-02S




MCNDI-04S



MCNDI-06S



MCNDI-08S



MCNDI-10S

Features:

- Low profile for space saving
- Gold contact for high reliability
- Top tape type for washing process


Application:

- Industrial control
- Automatic machines control
- Telecommunication

Specifications:


Terminal Type	: Splay Terminal
Contact Rating	: 25mA, 24V DC
Contact Resistance	: 50m Ω max.
Insulation Resistance	: 100M Ω min. 500V DC
Dielectric Strength	: 500V AC/1 minute
Operating Force	: 1,000gf max.
Travel	: 1mm
Operating Life	: 2,000 cycles
Operating Temperature	: -20°C to +85°C
Storage Temperature	: -40°C to +85°C

Circuit:

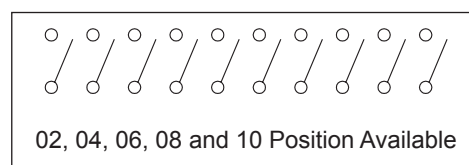

MCNDI Series

DIP Switches

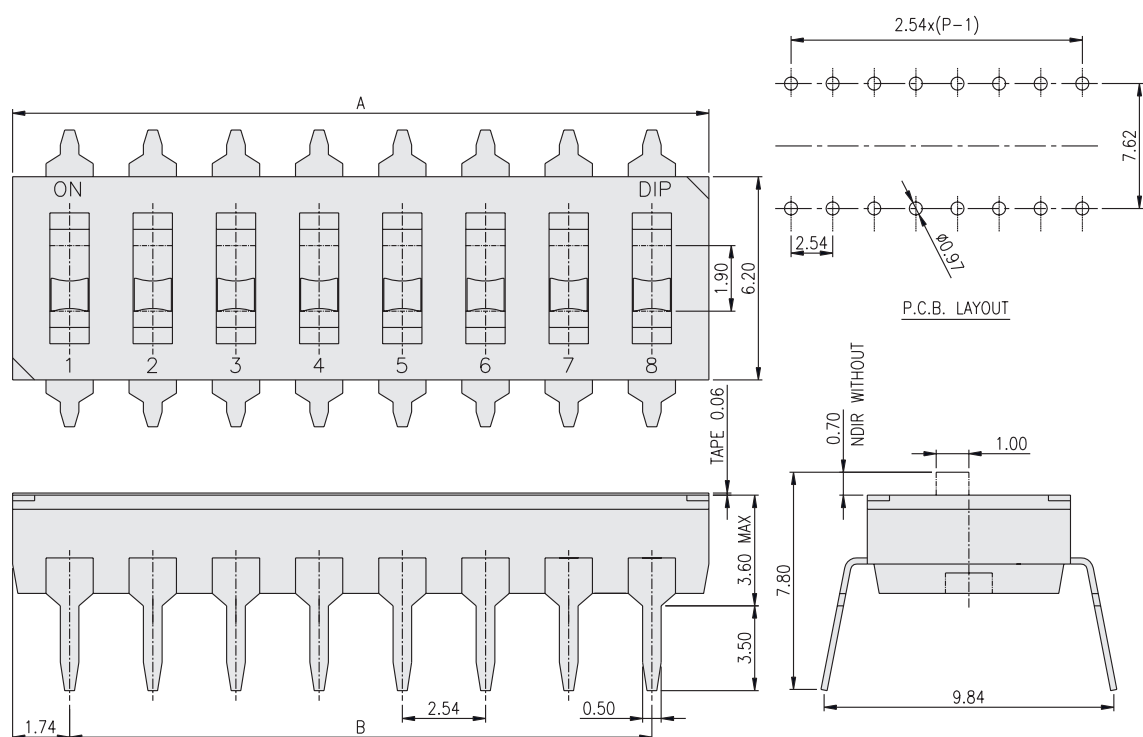

Dimensions : Millimetres

Part Number	No. of Position	Dimension A	Dimension B
MCNDI-02S	2	6.02	2.54
MCNDI-04S	4	11.1	7.62
MCNDI-06S	6	16.18	12.7
MCNDI-08S	8	21.26	17.78
MCNDI-10S	10	26.34	22.86

Part Number Table

Description	Part Number
Switch, DIL, Low, 2Way	MCNDI-02S
Switch, DIL, Low, 4Way	MCNDI-04S
Switch, DIL, Low, 6Way	MCNDI-06S
Switch, DIL, Low, 8Way	MCNDI-08S
Switch, DIL, Low, 10Way	MCNDI-10S

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.