

PLASTIC ENCASED SMD CRYSTAL

FPX

FEATURES

- Low Cost
- Stocking Standard
- Plastic Encapsulated
- Tape and Reel (1,000 pcs. STD)

OPTIONS

- Tolerances to < 20 PPM
- Stabilities to < 20 PPM
- Temperatures to -40°C ~ +85°C
- Alternate Metal Can Package (HC49SPX)




Discontinued

• STANDARD SPECIFICATIONS¹

PARAMETERS	MAX (unless otherwise noted)
Frequency Range	3.579545 ~ 90.000MHz
Frequency Tolerance @ 25°C	±50 PPM
Frequency Stability, ref @ 25°C Over Operating Temp Range	±50 PPM
Temperature Range	
Operating (TOPR)	-10°C ~ +70°C
Storage (TSTG)	-55°C ~ +125°C
Shunt Capacitance (Co)	7.0 pF
Load Capacitance (CL)	10 pF ~ Series (Customer Specified)
Drive Level	0.1 mW
Aging per year	±5 PPM


¹ Other tolerances, stabilities & operating temperature ranges available. Consult Fox Customer Service for specific requirements.

All specifications subject to change without notice. Rev. 8/1/03

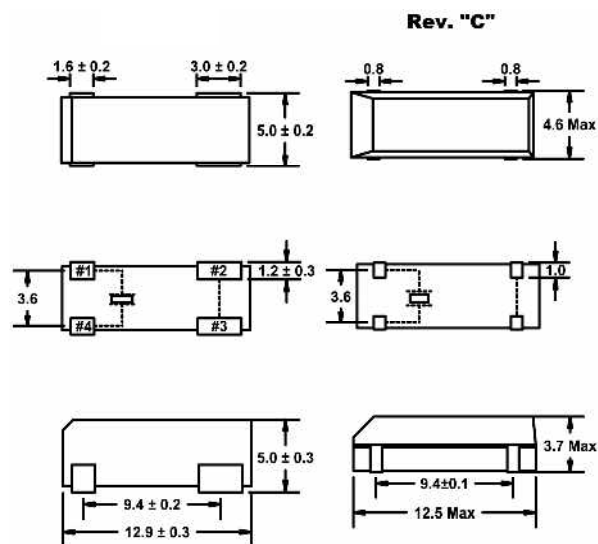

Frequency Range (MHz)	Operating Mode	Max ESR W
3.579545 ~ 4.000	Fundamental	200
4.000+ ~ 5.000	Fundamental	150
5.000+ ~ 6.000	Fundamental	120
6.000+ ~ 7.000	Fundamental	100
7.000+ ~ 9.000	Fundamental	80
9.000+ ~ 13.000	Fundamental	60
13.000+ ~ 20.000	Fundamental	40
20.000+ ~ 30.000	Fundamental	30
30.000+ ~ 90.000	3rd OT	100

Recommended Solder Pad Layout



Note: Solder Pad Layout accommodates both packages

All dimensions are in millimeters.

See page 28 for tape and reel specifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fox:

[FPX120-20](#) [FPX184-20](#) [FPX245F-20](#) [FPX098-20](#) [FPX600-20](#) [FPX0368S](#) [FPX221-20](#) [FPX500-20](#) [FPX080-20](#)
[FPX147](#) [FPX120](#) [FPX143](#) [FPX100](#) [FPX115](#) [FPX128](#) [FPX100-20](#) [FPX160](#) [FPX147-20](#) [FPX640-20](#) [FPX073](#)
[FPX080](#) [FPX049](#) [FPX073-20](#) [FPX160-20](#) [FPX0368-20 \(REV.A\)](#) [FPX200-20](#) [FPX480-20](#) [FPX111-20](#) [FPX180-20](#)
[FPX320-20](#) [FPX196-20](#) [FPX115-20](#) [FPX036S \(T&R\)](#) [FPX040A](#) [FPX250F-20](#) [FPX128-20](#) [FPX049-20](#) [FPX036S](#)
[FPX200](#) [FPX221](#) [FPX143-20](#) [FPX240F-20](#) [FPX081-20](#) [FPX196-20 REV C](#) [FPX040-20](#)