

SPECIFICATION OF R6H SERIES

APPLICATIONS

The R6H type wide-band chokes are mainly used in the PC boards to filter the EMI from the outsides

* High performance medium current DC power and signal filtering



ORDERING CODE

K5B R6H 6 x 10 x 0.85 - 1.5Ts
(1) (2) (3) (4)

- (1) MATERIAL
- (2) PRODUCT CODE
- (3) SIZE CODE
- (4) TURNS WOUND







SHAPE

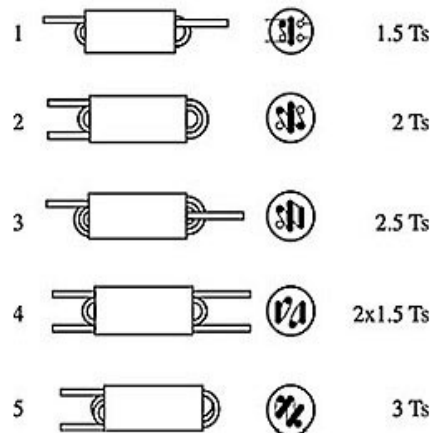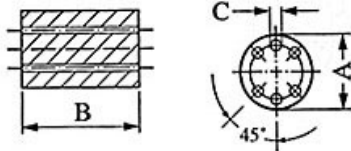

DIMENSIONS & CHARACTERISTICS

UNIT:mm











NO.	ORDERING CODE	A	B	C	Winding
1	R6H 6x10x0.85-1.5Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*1.5Ts
2	R6H 6x10x0.85-2Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*2Ts
3	R6H 6x10x0.85-2.5Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*2.5Ts
4	R6H 6x10x0.85-2x1.5Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*1.5Ts*2P
5	R6H 6x10x0.85-3Ts	6.00±0.25	10.00±0.40	0.85±0.20	φ0.5*3Ts



※Other sizes are available upon request.

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SPECIFICATION OF R6H SERIES



※Other sizes are available upon request.

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.