

8TA Connector






How to order

Basic series		8TA	0	08	35	P	N
Shell style	0: Oval flange receptacle (for front or rear mounting) 1: In-line receptacle 6: Plug 7: Jam nut receptacle						
Shell size	08						
Layout	35 (6 contacts size 22D)						
Type of contact	P: Pin contacts S: Socket contacts						
Orientation	N: Red / A: Yellow / D: Green						

Protective cap

Basic series		8TA	8	08
Shell style	8: Plug protective cap 9: Receptacle protective cap			
Shell size	08			

Range presentation

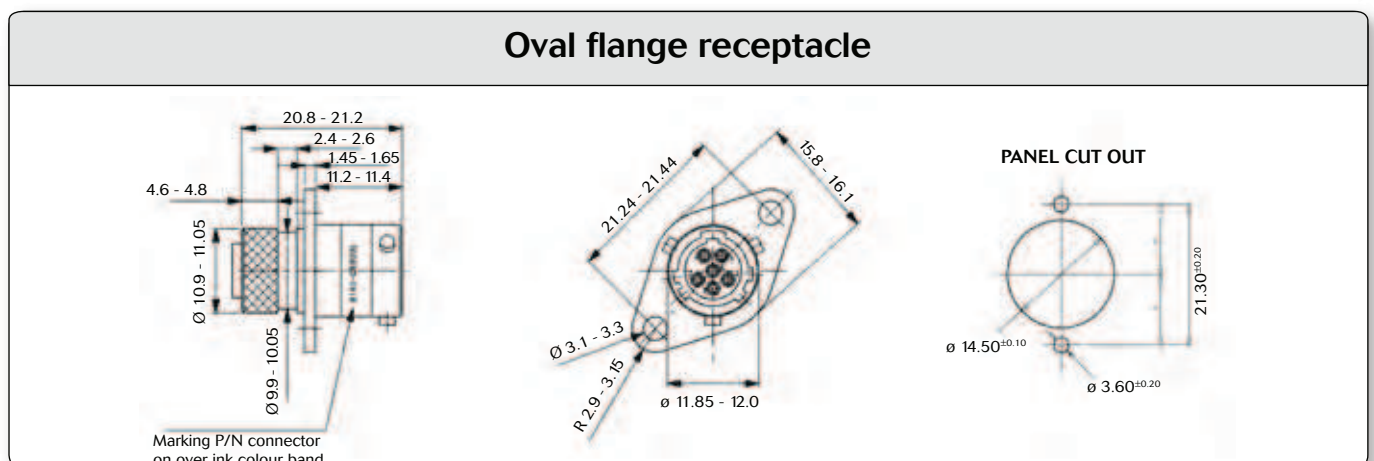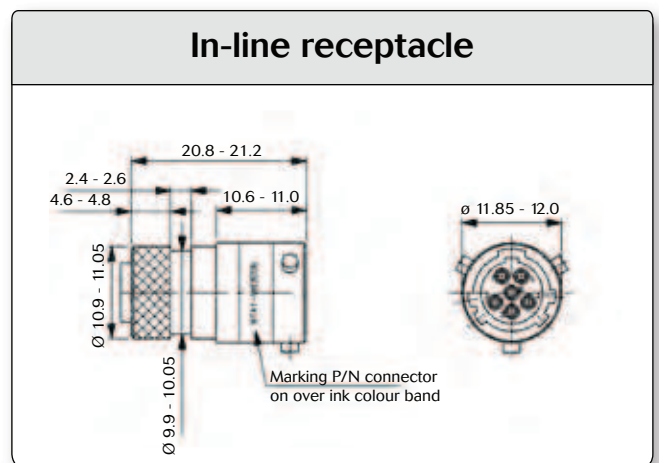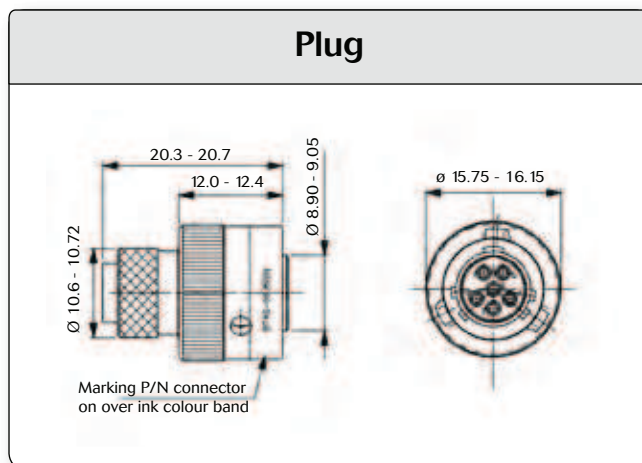

Note : all dimensions are in mm



8TA Connector

Jam nut receptacle

Marking P/N connector on over ink colour band

11.01 - 11.25
2.19 - 2.59
9.65 - 9.9
Ø 10.45 - 10.7
4.8 - 4.9
2.5 - 2.6
2.5
O ring seal

Ø 11.85 - 12.0
Ø 22 - 22.15

31.4 - 32.1
Ø 34.65 - 35.25
31.4 - 32.1

PANEL CUT OUT

Ø 22.46^{+0.25}
21.08^{+0.25}

Grounded receptacle

32 max.
8 8 13 max.
M8 18

Connecting interface compliant with 8TA0

Please consult us for more information

Orientation

Viewed from face of receptacle

Viewed from face of plug

Key positions	Alpha 1	Colour band
N	100°	Red
A	82°	Yellow
D	118°	Green