

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1917195

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-1S17D8


CW-B8601

CATALOG LISTING
V7-1S17D8
PAGE 1 OF 1
RELEASE NO. PR-17794

ISSUE
7

REVISIONS

A	CO-188464	BAB	26 SEP 90
B	CO-74431	JWB	26 FEB 93
C	CO-77116	DCS	31 MAR 94
D	CO-82776	JAF	5 APR 96
E	CO-92478	TSM	21 APR 98
F	CO-93311	TSM	21 OCT 98

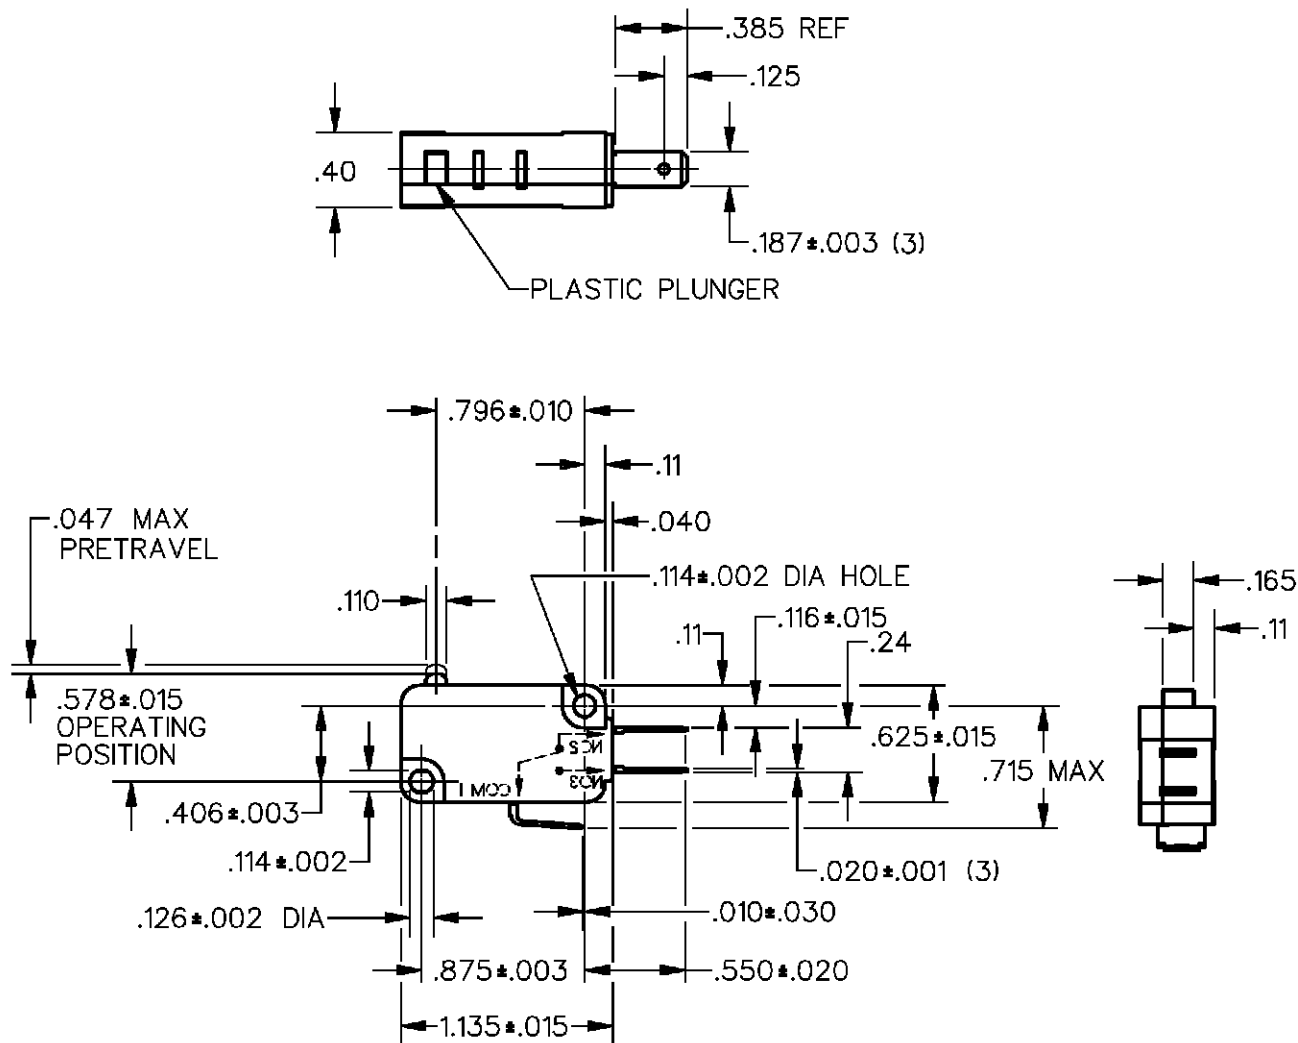


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 25 GRAMS MIN	0.1A 125 VAC L142 	ONE PLACE (.)	±.030
DIFFERENTIAL TRAVEL — — — .002-.010		TWO PLACE (.00)	±.015
OVERTRAVEL — — — — — .050 MIN		THREE PLACE (.000)	±.005
RELEASE TRAVEL — — — — — .010 MIN		ANGLES	±
FREE POSITION — — — — — .625 MAX		WEIGHT	

FORMTEK

DRAWN

WJM 20 FEB 90 CHECK DAW 23 FEB 90