




SPECIFICATIONS

FREQUENCY RANGE: 1.0–18.0 GHz
 COUPLING (INCLUDES FREQUENCY SENSITIVITY): 20 ± 1.00 dB
 FREQUENCY SENSITIVITY: ± 0.50 dB
 INSERTION LOSS: (EXCLUDING COUPLED POWER) 0.80 dB (TRUE) .90 dB
 DIRECTIVITY: 15 dB MINIMUM (1–12.4) 12 dB MINIMUM (12.4–18)
 PRIMARY LINE: 1.40 VSWR MAX.
 SECONDARY LINE: 1.50 VSWR MAX.
 AVG. INCIDENT: 25 WATTS POWER
 AVG. REFLECTED: 25 WATTS POWER
 PEAK: 3 KW POWER

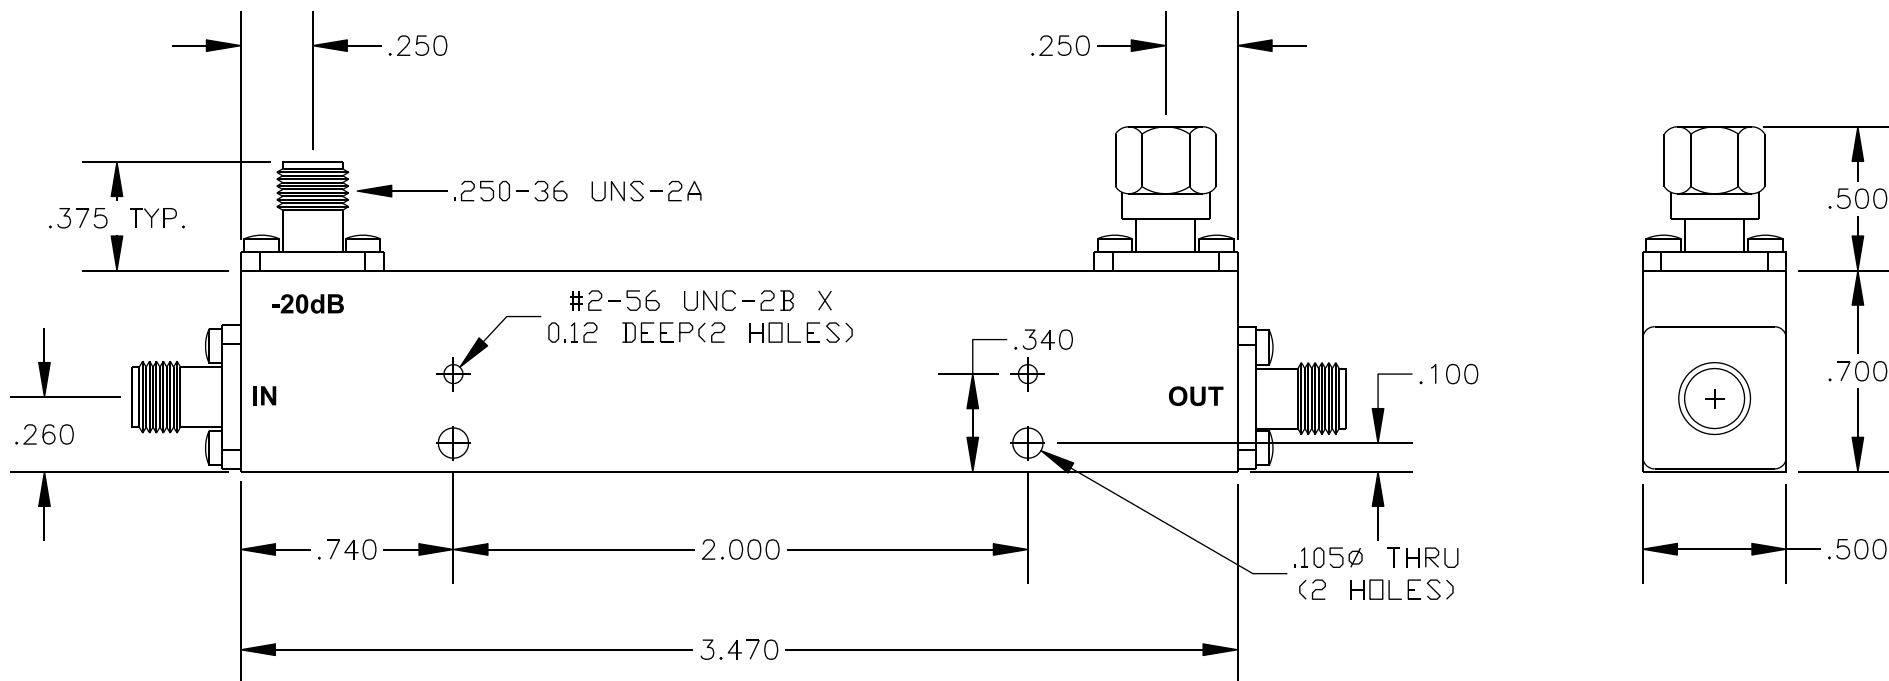

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE2214-20

DES. SMA FEMALE DIRECTIONAL COUPLER
 BROADBAND FREQUENCY RANGE: 1.0-18.0 GHz

REV. A **FSCM NO. 53919**

CAD FILE 092908

SCALE N/A

SIZE A 147

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.